

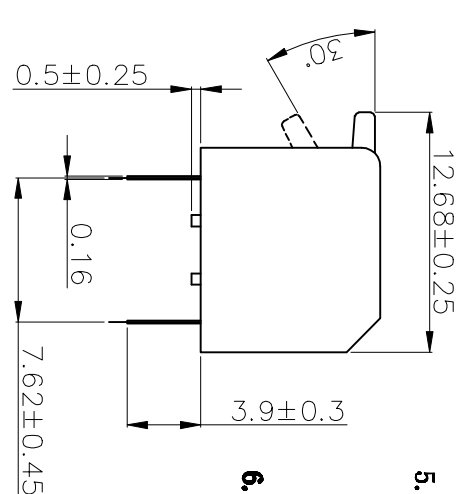
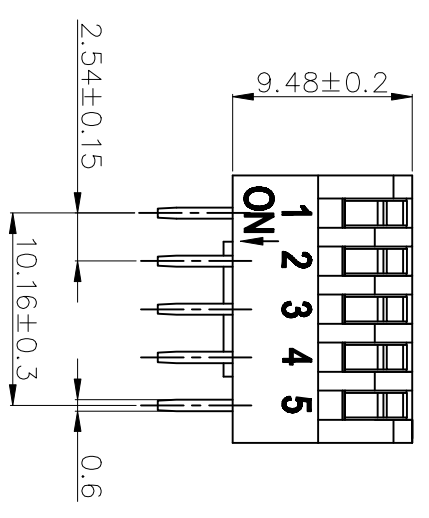


PRODUCT NO. DSDP05LHGET	RoHS compliant
-----------------------------------	-----------------------

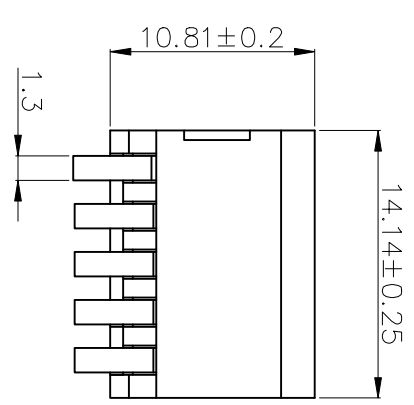


- Note:**
- All dimensions are in millimeters.
 - General tolerance: $\pm 0.2\text{mm}$.
 - Material:

- Base: UL94V-0 PBT Thermoplastic (Black).
- Cover: UL94V-0 PBT Thermoplastic (Black/Red/Blue).
- Actuators: UL94V-0 PBT Thermoplastic (White).
- Contact plating: Gold plating over nickel.
- Pitting material: Epoxy.

- Electrical
 - Electrical: 2000 Operations per switch 24/VDC, 25mA.
 - Non-Switching Rating: 100mA, 50/VDC.
 - Switching Rating: 25mA, 24/VDC
 - Contact Resistance: 100 mΩ Max. at initial.
- Mechanical
 - Mechanical life: 2000 Operations per switch.
 - Stroke: 30°.
 - Operation Temp: -20°C to 70°C.
 - Storage Temp: -40°C to 85°C.

6. PART NUMBER DESCRIPTION:

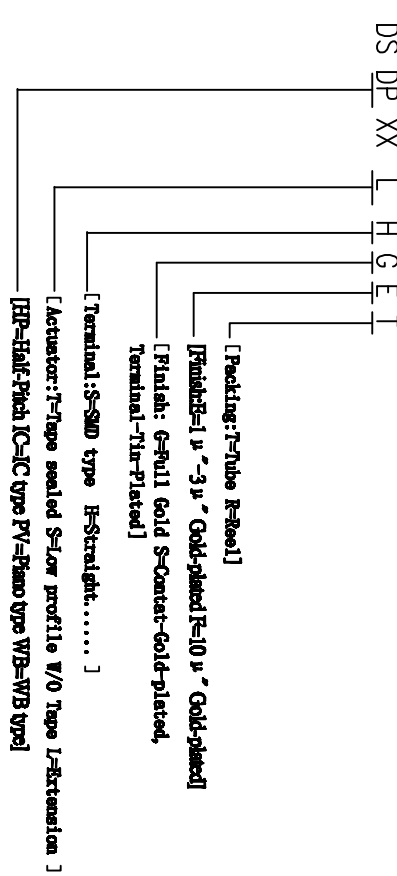

TOLERANCE UNLESS OTHERWISE SPECIFIED		INSPECTION	
LINE	ANGLES	QRT	PROJECTION
0 ± 0.40	0 ± 1°		
.00 ± 0.30	.0 ± 0.5°		
.000 ± 0.20	.00 ±		
DESIGN	UI ER TIN	3013/07/08	
DRAWING			
CHECK			
APPROV			
TITLE		BY DSDP SERIES PITCH 2.54mm	
PRODUCT FAMILY		DSDP SERIES	
PART NO.		DSDP05LHGET	
DRAWING		DSDP05LHGET-A	
FILE NO.	UNIT	SCALE	SHEET
A4	mm	1:1	1 OF 1

东莞市广誉实业有限公司
Dongguan Kingtek Industrial Co., Ltd.

单击下面可查看定价，库存，交付和生命周期等信息

[>>KINGTEK\(广督\)](#)