

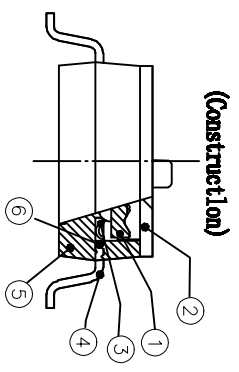
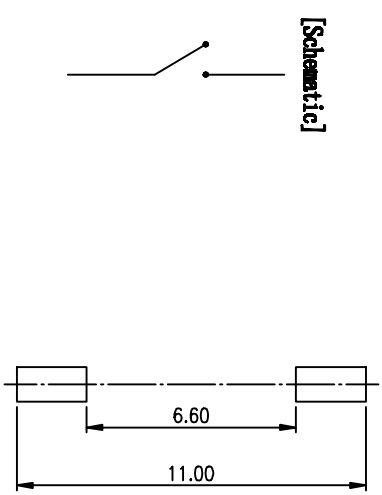

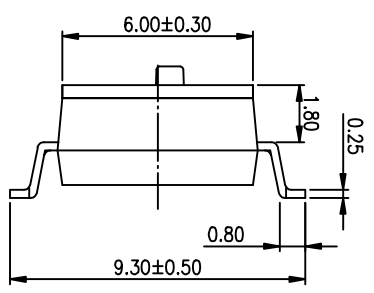


PRODUCT NO.	DISC011SGE1
RoHS compliant	

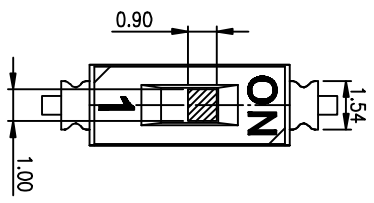

**RECOMMENDED P.C.B. LAYOUT (TOP VIEW)**



- NOTES :
- 1> Operation force: 1000gf Max
  - 2> Operating Temperature: -40° to+85°
  - 3> Storage Temperature: -40° to+85°
  - 4> Mechanical Life: 3000cycles minimum
  - 5> Electrical Life: 2000cycles minimum
2. PLATING:  
 GOLD FLASH 1u"(min.) SOLDER TAIL,  
 3u" GOLD PLATING ON THE CONTACT AREA,  
 WITH 50u" NICKEL UNDERPLATING OVERALL.

3. PART NUMBER DESCRIPTION

- DISC XX L S G E T
- [包装方式: T=管装 R=盒装]
  - [电镀层: B=镀锡3u" G=镀镍3u" / 焊锡3u"-2u"]
  - [G=鍍金 S=內金外鍍]
  - [脚型: S脚 / J脚 / 0脚 / A脚 / Z脚]
  - [T=低接触度 S=低接触度 L=长推]
  - [产品代码: 02=2P 04=4P 06=6P 08=8P 10=10P 12=12P]

Number	Part Name	Material	Finished
①	Actuator	UL94 V0	White
②	Cover	UL94 V0	Black
③	Movable	Copper Alloy	3u"Gold
④	Terminal	Brass	1u"Gold
⑤	Base	UL94 V0	Black
⑥	Terminal Contact	Brass	3u"Gold

TOLERANCE UNLESS OTHERWISE SPECIFIED		INSPECTION COPY	
LINER	ANGLES	PROJECTION	COPY
0 ± 0.25	0. ± 2°	0.80	
.00 ± 0.15	.0 ± 1°		
.000 ± 0.10	.00 ± 0.5°		
DESIGN	kathy	2012/04/12	
DRAWING			
CHECK			
APPRO.			

**RE** 东莞市广誉实业有限公司  
 Dongguan Kingtek Industrial Co., Ltd.

FILE NO.	DISC011SGE1-A
SIZE	UNIT SCALE SHEET REV.
A4	mm 2 : 1 1OF 1 A

单击下面可查看定价，库存，交付和生命周期等信息

[>>KINGTEK\(广督\)](#)