

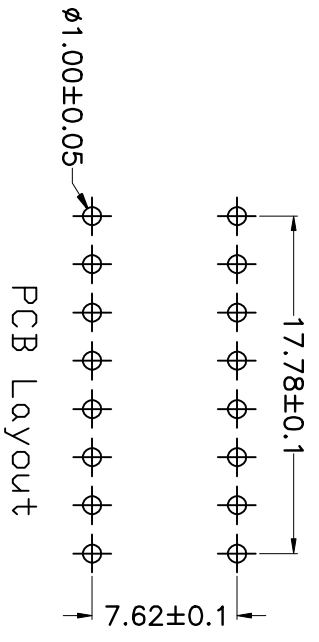
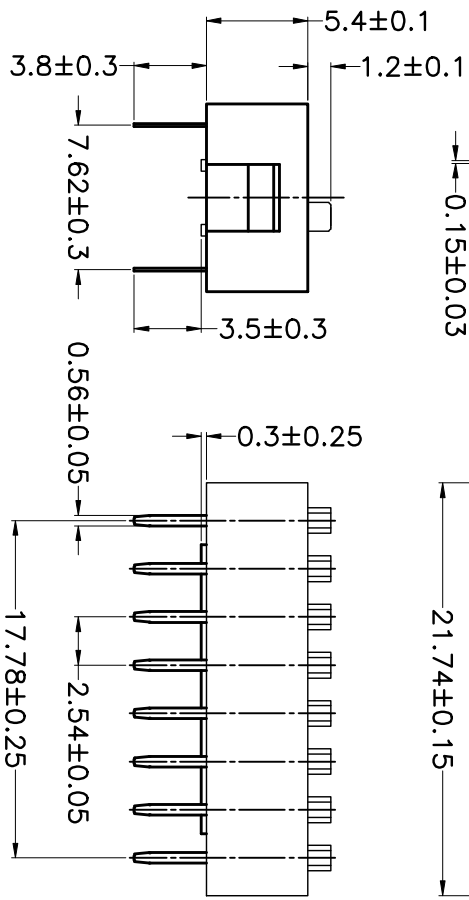
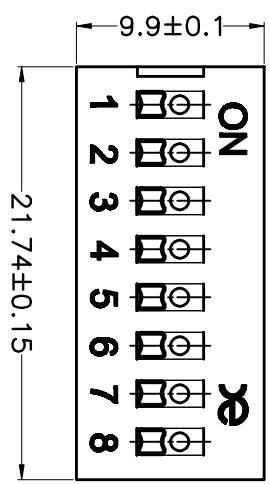


PRODUCT NO. DSWB08LHGCT
RoHS compliant



- Note:
- All dimensions are in millimeters.
 - General tolerance: ±0.2mm.
 - Material:


Base: UL94V-0 PBT Thermoplastic (Black).
 Cover: UL94V-0 PBT Thermoplastic (Black/Red/Blue).
 Actuators: UL94V-0 PA66 Thermoplastic (White).
 Contact plating: Gold plating over nickel.
 Pitting material: Epoxy.

4. Electrical
 Electrical: 2000 Operations per switch 24/VDC, 25mA.
 Non-Switching Rating: 100mA, 50/VDC.
 Switching Rating: 25mA, 24/VDC
 Contact Resistance: 100 mΩ Max at initial.

5. Mechanical
 Mechanical life: 2000 Operations per switch.
 Stroke: 2.0mm.
 Operation Temp: -20°C to 70°C.
 Storage Temp: -40°C to 85°C.

6. PART NUMBER DESCRIPTION:

DS WB 08 L H G E T

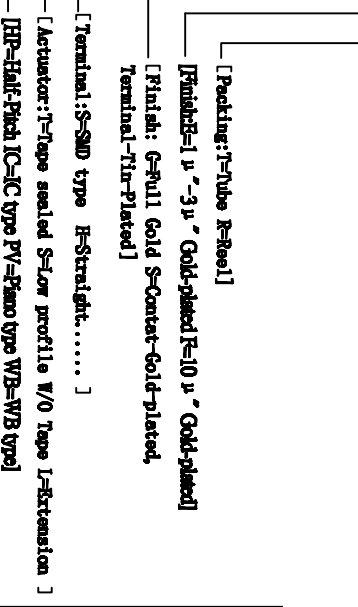

TOLERANCE UNLESS OTHERWISE SPECIFIED		INSPECTION COPY		 东莞市富实业有限公司 Dongguan Kingtek Industrial Co., Ltd.	
LINER	ANGLES	PROJECTION	FILE NO.	PRODUCT FAMILY	TITLE
0 ± 0.30	0 ± 1°		DSWB08LHGCT-A	BY DSWB SERIES	DSWB08LHGCT
.00 ± 0.20	.0 ± 0.5°		DSWB08LHGCT-A	PITCH 2.54mm	
.000 ± 0.10	.00 ±		DSWB08LHGCT-A	DSWB SERIES	
DESIGN	LU ER XIN	2013/07/02	PRAT NO.	DSWB08LHGCT	
DRAWING					
CHECK					
APPRO.					
SIZE	UNIT	SCALE	SHEET	REV.	
A4	mm	FIT	TOP-1	A	

单击下面可查看定价，库存，交付和生命周期等信息

[>>KINGTEK\(广督\)](#)