

PRODUCT NO.	DSDP091HCJET
RoHS compliant	

REV.	ECN NO.	DR	DATE

**Note:**  
 1. All dimensions are in millimeters.  
 2. General tolerance:  $\pm 0.2\text{mm}$ .  
 3. Material:

Base: UL94V-0 PBT Thermoplastic (Black).  
 Cover: UL94V-0 PBT Thermoplastic (Black/Red/Blue).  
 Actuators: UL94V-0 PBT Thermoplastic (White).  
 Contact plating: Gold plating over nickel.  
 Pitting material: Epoxy.

**4. Electrical**

Electrical: 2000 Operations per switch 24/VDC, 25mA.  
 Non-Switching Rating: 100mA, 50/VDC.  
 Switching Rating: 25mA, 24/VDC  
 Contact Resistance: 100 mΩ Max at Initial.





**5. Mechanical**

Mechanical life: 2000 Operations per switch.  
 Stroke: 30° .  
 Operation Temp: -20°C to 70°C.  
 Storage Temp: -40°C to 85°C.

**6. PART NUMBER DESCRIPTION:**

DS DP XX L H G E I

- [Packing: T-Tube R-Seal]
- [Finish: 1 μ " 3 μ " Gold-plated R=10 μ " Gold-plated]
- [Finish: 6-Full Gold S-Contact-Gold-plated, Terminal-Tin-Plated]
- [Terminal: S-SMD type H=Straight.....]
- [Actuator: T-Tape sealed S-F or profile W/O Tape L=Extension]
- [HP=Half-Pitch IC=IC type PV=Plano type WB=WB type]

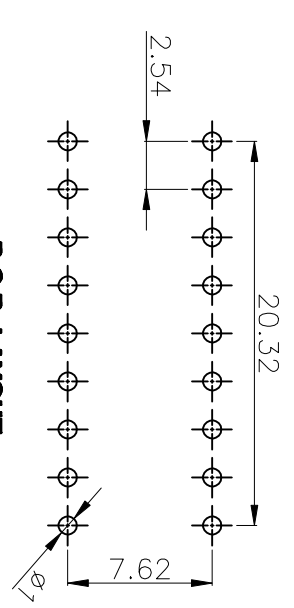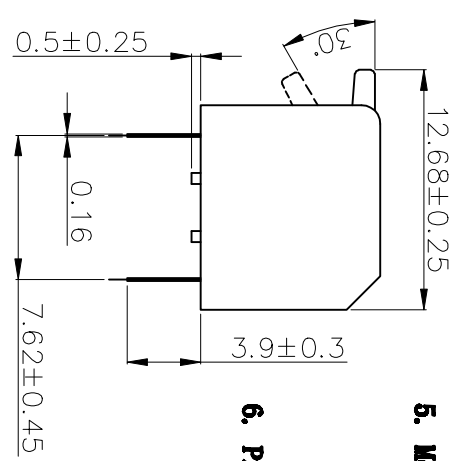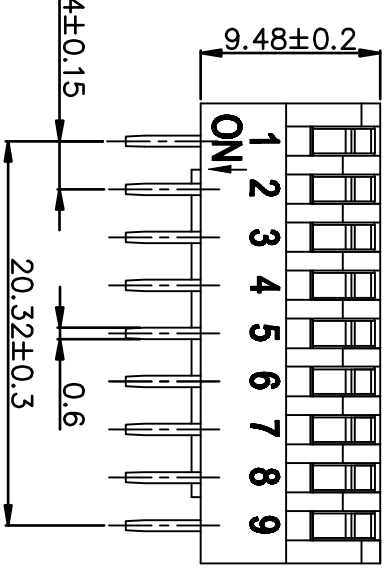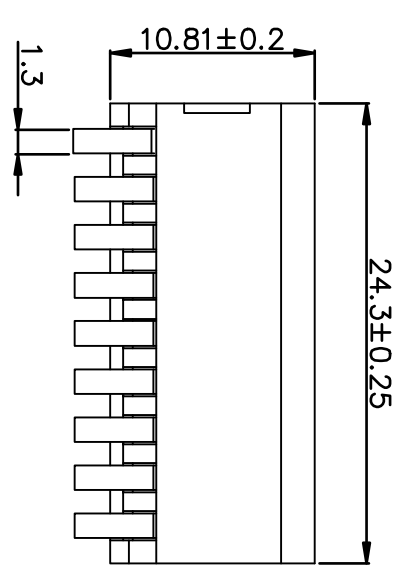

**P.C.B LAYOUT**

TOLERANCE UNLESS OTHERWISE SPECIFIED		INSTRUCTION	
LINE	ANGLE	CHIT	PROJECTION
0 ± 0.40	0 ± 1°		
.00 ± 0.30	.0 ± 0.5°		
.000 ± 0.20	.00 ±		
DESIGN	LIU ER TUN	30/13/07/08	
DRAWING			
CHECK			
APPROV			
TITLE		BY DSDP SERIES PITCH 2.54mm	
PRODUCT FAMILY		DSDP SERIES	
PART NO.		DSDP091HCJET	
DRAWING NO.		DRAWING-1	
SIZE	UNIT	SCALE	REV.
A4	MM	1:1	A

**东莞市广普实业有限公司**  
 Dongguan Kingtek Industrial Co., Ltd

单击下面可查看定价，库存，交付和生命周期等信息

[>>KINGTEK\(广督\)](#)