
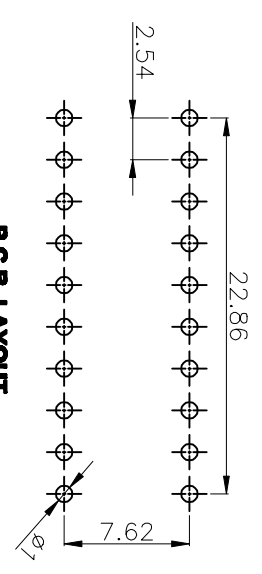
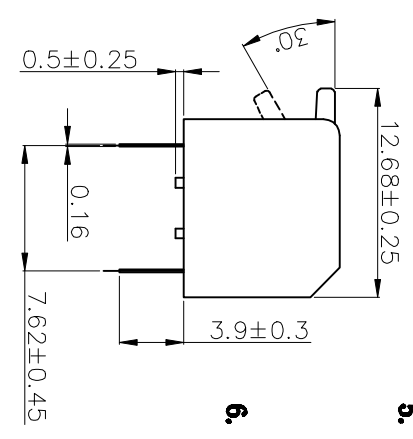
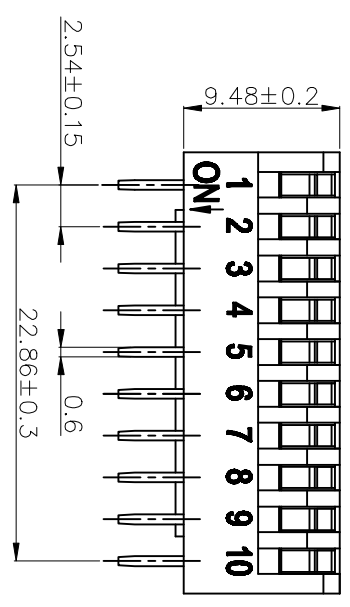


PRODUCT NO.	DSDP101H3EET
RoHS compliant	

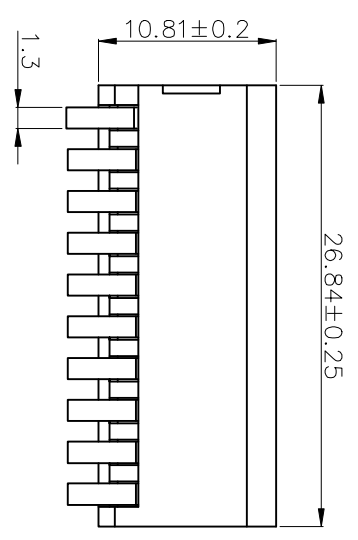

- Note:**
- All dimensions are in millimeters.
 - General tolerance: $\pm 0.2\text{mm}$.
 - Material:


- Base: UL94V-0 PBT Thermoplastic (Black).
- Cover: UL94V-0 PBT Thermoplastic (Black/Red/Blue).
- Actuators: UL94V-0 PBT Thermoplastic (White).
- Contact plating: Gold plating over nickel.
- Pitting material: Epoxy.

- Electrical
- Electrical: 2000 Operations per switch 24/VDC, 25mA.
 - Non-Switching Rating: 100mA, 50/VDC.
 - Switching Rating: 25mA, 24/VDC
 - Contact Resistance: 100 mΩ Max. at initial.

- Mechanical
- Mechanical life: 2000 Operations per switch.
 - Stroke: 30°
 - Operation Temp: -20°C to 70°C.
 - Storage Temp: -40°C to 85°C.

6. PART NUMBER DESCRIPTION:

DS DP XX L H G E I

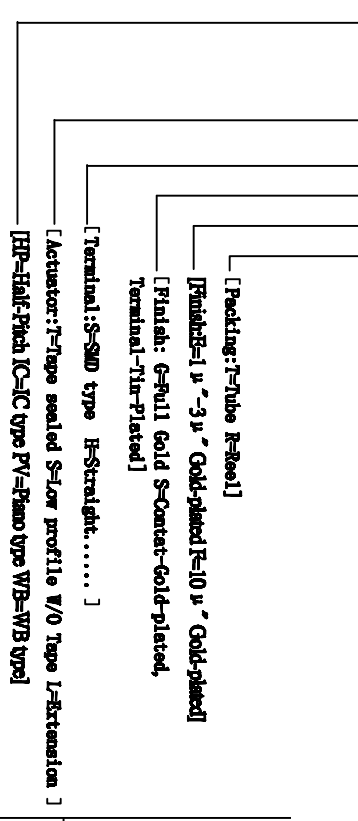

TOLERANCE UNLESS OTHERWISE SPECIFIED	INSTRUCTION
LINE	ANGLE
0 ± 0.40	0 ± 1°
.00 ± 0.30	.0 ± 0.5°
.000 ± 0.20	.00 ±
FINISH	PLAT. NA.
ULI BR TIN	3013/01/02
DRAWING	
CHECK	
APPROV.	

东莞市广誉实业有限公司 Dongguan Kingtek Industrial Co., Ltd.	
TITLE BY DSDP SERIES PITCH 2.54mm	
PRODUCT FAMILY DSDP SERIES	
PART NO. DSDP101H3EET	
FILE NO. DSDP101H3EET-1	
SIZE A4	UNIT mm
SCALE FIT	SHRINK 10F-1
REV. A	REV. A

单击下面可查看定价，库存，交付和生命周期等信息

[>>KINGTEK\(广督\)](#)