

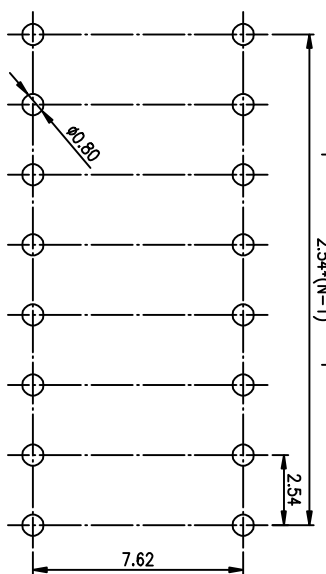
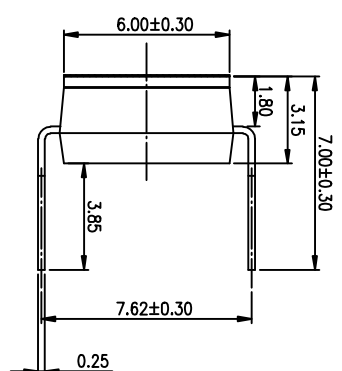
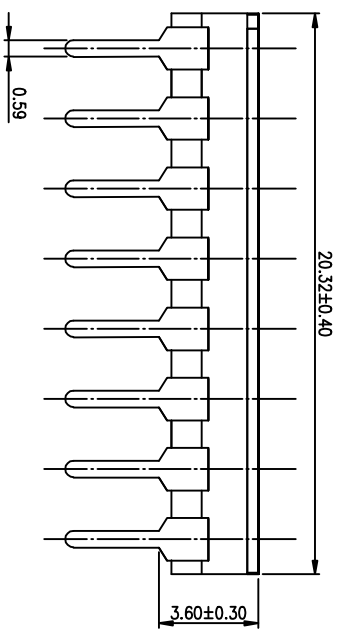


PRODUCT NO. DISC08THGET	RoHS compliant
-----------------------------------	-----------------------

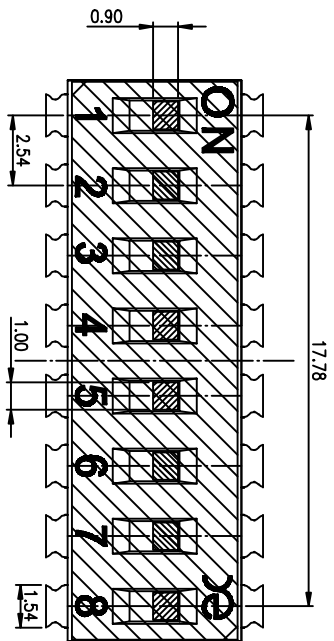

RECOMMENDED P.C.B. LAYOUT (TOP VIEW)

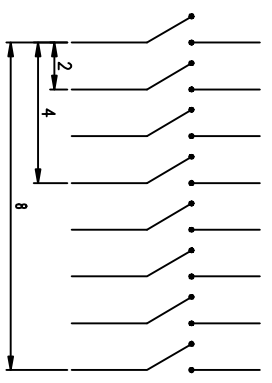

[Schematic]

- NOTES :
- 1> Specification:
 - 1> Operating force: 1000gf Max
 - 2> Operating Temperature: -40° to +85°
 - 3> Storage Temperature: -40° to +85°
 - 4> Mechanical Life: 3000cycles minimum
 - 5> Electrical Life: 2000cycles 25mA 24VDC
 2. PLATING:
 - GOLD FLASH 1u"(min.) SOLDER TAIL,
 - 3u" GOLD PLATING ON THE CONTACT AREA,
 - WITH 50u" NICKEL UNDERPLATING OVERALL.
 3. PART NUMBER DESCRIPTION

- DISC XX I H G E I
- [包装方式: T-管装 R=Roll]
 - [电镀层: B-镀镍3u" G-镀金3u" 户家款1-2u"]
 - [G-镀金 S-内金外镀]
 - [脚型: S脚 / J脚 / 直脚 / A脚 / Z脚]
 - [T-低档封装 S-低档不封装 L-长插]
 - [产品公差: 01=1P 02=2P 03=3P 12=12P]

Number	Part Name	Material	Finished
①	Actuator	UL94 VO	White
②	Cover	UL94 VO	Black
③	Movable	Copper Alloy	3u"Gold
④	Terminal	Brass	1u"Gold
⑤	Base	UL94 VO	Black
⑥	Terminal Contact	Brass	3u"Gold
⑦	Mylar	UL94 VO	0.05mm

TOLERANCE UNLESS OTHERWISE SPECIFIED		INSPECTION COPY	TITLE	
LINER	ANGLES	PROJECTION	BY DISC SERIES PITCH 2.54mm	
0 ± 0.25	0. ± 2°	⊕	DRAWING	
.00 ± 0.15	.0 ± 1°	⊖	CHECK	
.000 ± 0.10	.00 ± 0.5°		APPRO.	
DESIGN kathy		2012/04/12		
DRAWING		PRODUCT FAMILY DISC SERIES		
PRAT NO.		DISC08THGET		
FILE NO.		DISC08THGET-A		
SIZE	UNIT	SCALE	SHEET	REV.
A4	mm	2 : 1	1 OF 1	A



单击下面可查看定价，库存，交付和生命周期等信息

[>>KINGTEK\(广督\)](#)