
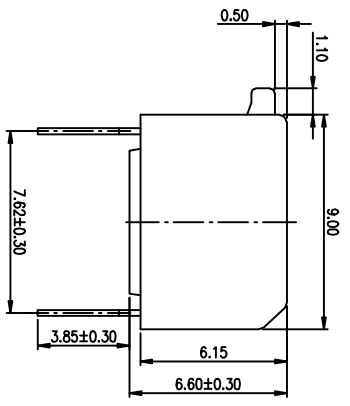





PRODUCT NO.	DSPV10LHGET
RoHS compliant	

REV.	ECN NO.	DR	DATE

NOTES : 1 Specification:  
 1>.Operating force:10000gf Max  
 2>.Operating Temperature: -40° to+85°  
 3>.Storage Temperature: -40° to+85°  
 4>.Mechanical Life:3000cycles minimum  
 5>Electrical Life:2000cycles minimum

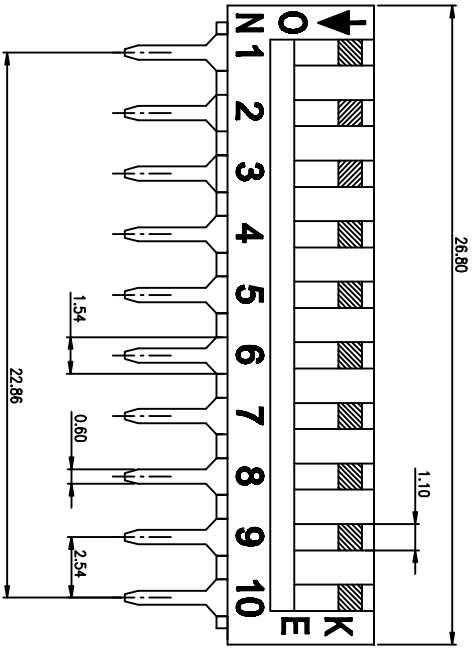

- PART NUMBER DESCRIPTION :
- CONTACT RATING:
  - 1.SWITCHING: 25mA at 24VDC
  - 2.NON-SWITCHING: 100mA at 50VDC WITH 50u" NICKEL UNDERPLATINGOVERALL.
- CONTACT RATING:
- PART NUMBER DESCRIPTION :

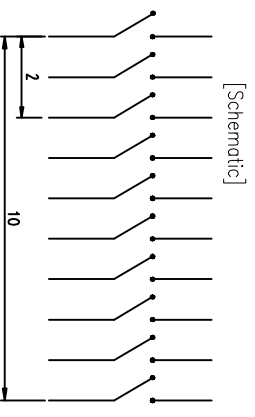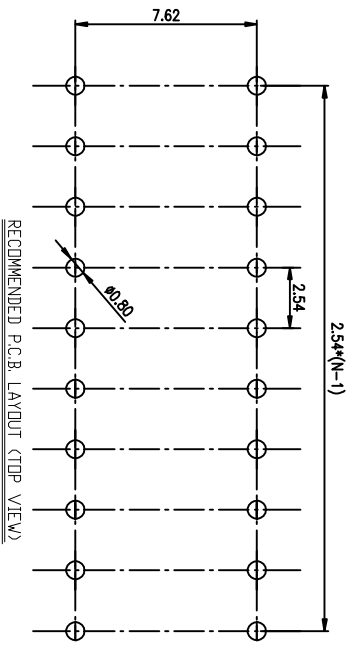

[Packing: T=Tube R=Reel]  
 [Finish: F=3u" Gold-plated F=10u" Gold-plated]  
 [Finish: G=Full Gold S=Contact-Gold-plated]  
 [Terminal: S=SMD type B=Strait:.....]  
 [Actuator: T=Tape sealed S=Low profile W/O Tape L=Extension]  
 [HP=Half Pitch IC=IC type PV=Plano type]

Number	Part Name	Material	Finished
①	Actuator	UL94 V0	White
②	Cover	UL94 V0	Black
③	Movable	Copper Alloy	3u" Gold
④	Terminal	Brass	1u" Gold
⑤	Base	UL94 V0	Black
⑥	Terminal Contact	Brass	3u" Gold

TOLERANCE UNLESS OTHERWISE SPECIFIED	ANGLES	PROJECTION
0 ± 0.25	0 ± 2°	COPY
.00 ± 0.15	.0 ± 1°	
.000 ± 0.10	.00 ± 0.5°	

INSPECTION	BY DSPV SERIES PITCH 2.54mm
COPY	PRODUCT FAMILY DSPV SERIES
FILE NO.	DSPV10LHGET
SIZE	UNIT SCALE SHEET REV.
A4	mm 1 : 1 TOF 1 A

**RIE** 东莞市广聚实业有限公司  
 Dongguan Kingtek Industrial Co., Ltd.

单击下面可查看定价，库存，交付和生命周期等信息

[>>KINGTEK\(广督\)](#)