

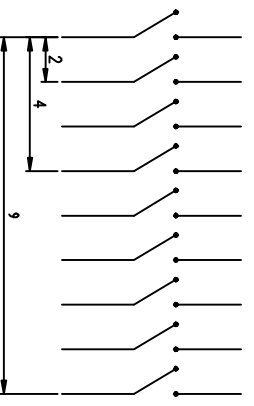

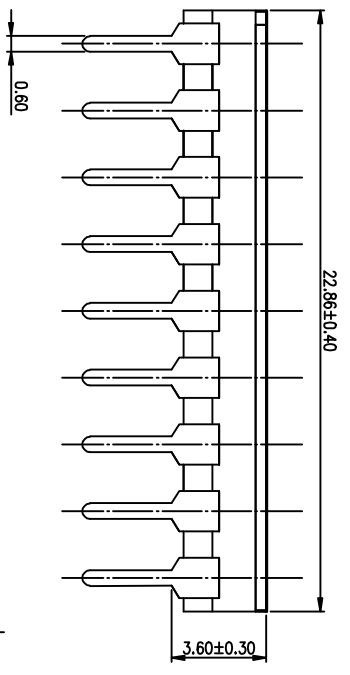
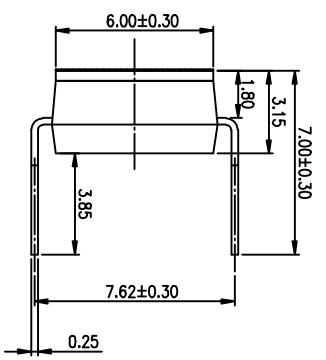




PRODUCT NO.	DSIC09THGET
RoHS compliant	

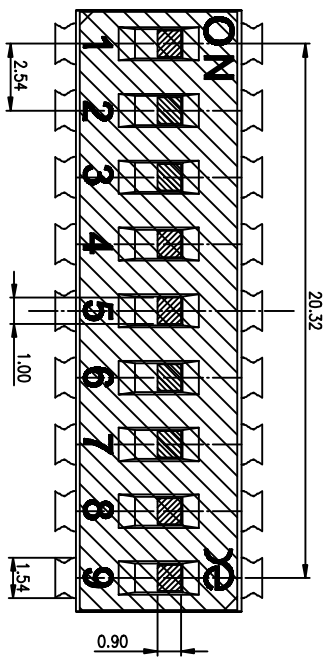

REV.	ECN NO.	DR	DATE

- NOTES :
- Specification:
 - Operating force: 1000gf Max
 - Operating Temperature: -40° to +85°
 - Storage Temperature: -40° to +85°
 - Mechanical Life: 3000cycles minimum
 - Electrical Life: 2000cycles 25mA 24VDC
 - PLATING:
 - GOLD FLASH 1u"(min.) SOLDER TAIL,
 - 3u" GOLD PLATING ON THE CONTACT AREA,
 - WITH 50u" NICKEL UNDERPLATING OVERALL.

3. PART NUMBER DESCRIPTION

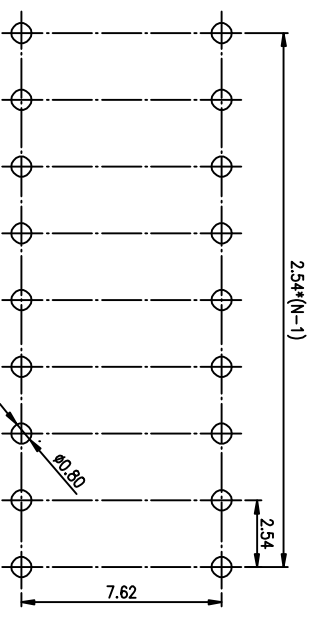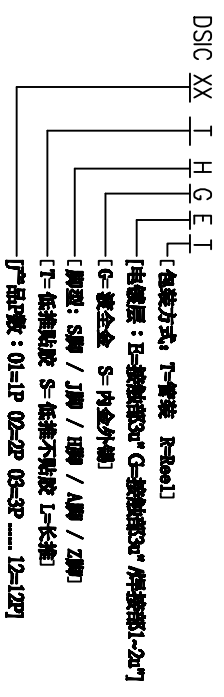

Number	Part Name	Material	Finished
①	Actuator	UL94 VO	White
②	Cover	UL94 VO	Black
③	Movable	Copper Alloy	3u"Gold
④	Terminal	Brass	1u"Gold
⑤	Base	UL94 VO	Black
⑥	Terminal Contact	Brass	3u"Gold
⑦	Mylar	UL94 VO	0.05mm

TOLERANCE UNLESS OTHERWISE SPECIFIED		INSPECTION COPY	
LINER	ANGLES	PROJECTION	
0 ± 0.25	0. ± 2'	BY DISC SERIES PITCH 2.54mm	
.00 ± 0.15	.0 ± 1'	PRODUCT FAMILY DISC SERIES	
.000 ± 0.10	.00 ± 0.5'	PRAT NO. DISC09THGET	
DESIGN kathy		2012/04/12	
DRAWING		FILE NO. DSIC09THGET-A	
CHECK		SIZE UNIT SCALE SHEET REV.	
APPRO.		A4 mm 2 : 1 1 OF 1 A	



单击下面可查看定价，库存，交付和生命周期等信息

[>>KINGTEK\(广督\)](#)