

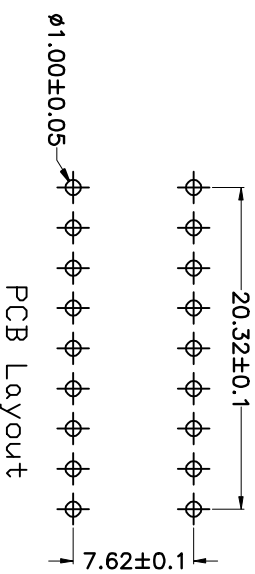
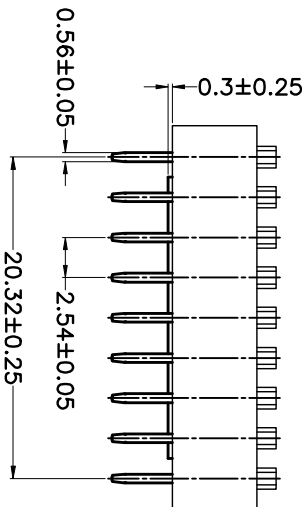
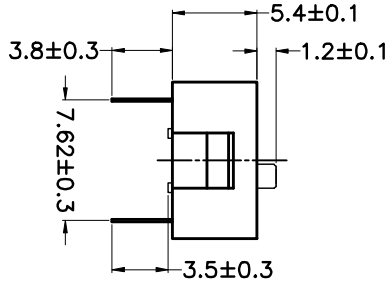
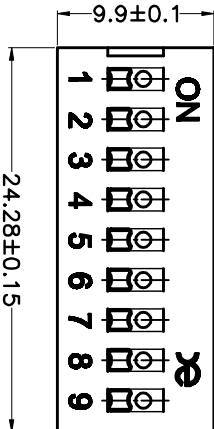


PRODUCT NO.	DSWB09LHGFT
Rohs compliant	



- Note:
- All dimensions are in millimeters.
  - General tolerance:  $\pm 0.2\text{mm}$ .
  - Material:


- Base: UL94V-0 PBT Thermoplastic (Black).
- Cover: UL94V-0 PBT Thermoplastic (Black/Red/Blue).
- Actuators: UL94V-0 PA66 Thermoplastic (White).
- Contact plating: Gold plating over nickel.
- Pitting material: Epoxy.

- Electrical
  - Electrical: 2000 Operations per switch 24/VDC, 25mA.
  - Non-Switching Rating: 100mA, 50/VDC.
  - Switching Rating: 25mA, 24/VDC
  - Contact Resistance: 100 mΩ Max at initial.

- Mechanical
  - Mechanical life: 2000 Operations per switch.
  - Stroke: 2.0mm.
  - Operation Temp: -20°C to 70°C.
  - Storage Temp: -40°C to 85°C.

6. PART NUMBER DESCRIPTION:

DS WB 09 L H G E T

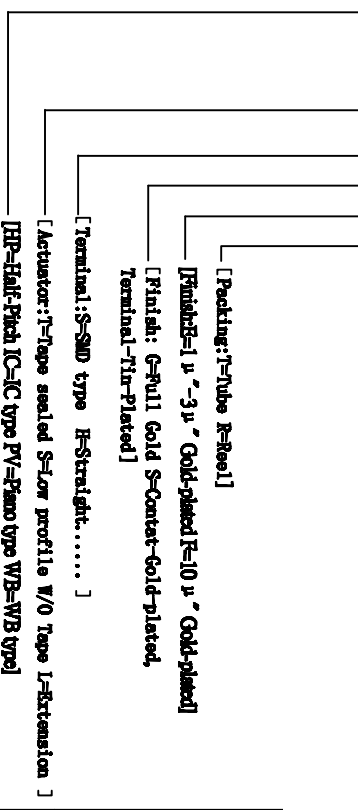

TOLERANCE UNLESS OTHERWISE SPECIFIED		INSPECTION COPY	
LINER	ANGLES	PROJECTION	
0 ± 0.30	0 ± 1°		
.00 ± 0.20	.0 ± 0.5°		
.000± 0.10	.00±		
DESIGN	LU ER XIN	2013/07/02	
DRAWING			
CHECK			
APPRO.			
TITLE		BY DSMB SERIES PITCH 2.54mm	
PRODUCT FAMILY		DSMB SERIES	
PRAT NO.		DSWB09LHGFT	
FILE NO.	DSWB09LHGFT-A	SIZE	SHEET
UNIT	mm	SCALE	REV.
mm	mm	1:1	A

单击下面可查看定价，库存，交付和生命周期等信息

[>>KINGTEK\(广督\)](#)