

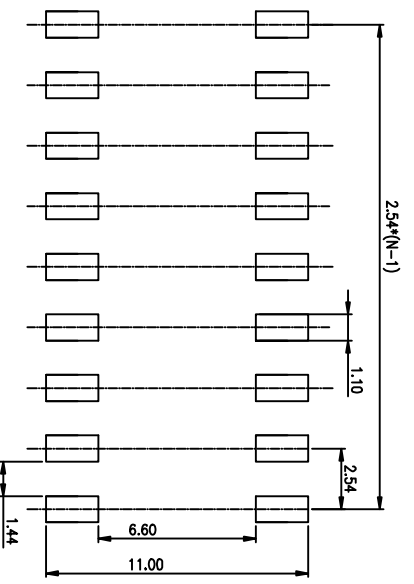
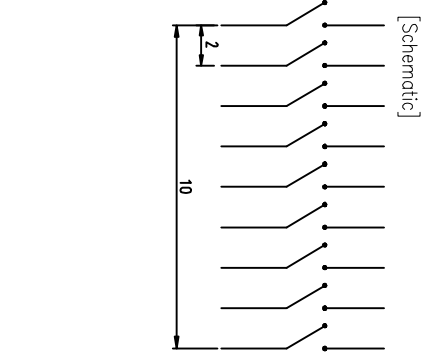
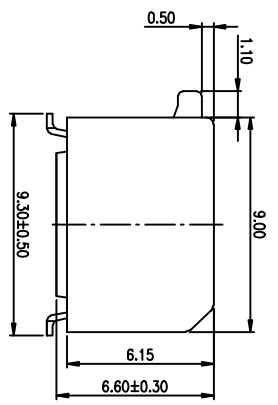


PRODUCT NO.	DSPV091SGE1
RoHS compliant	

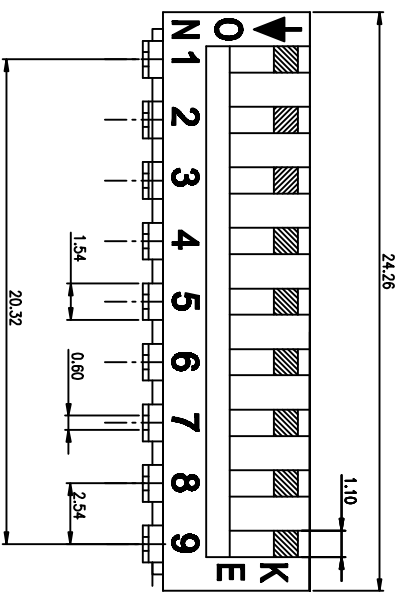

RECOMMENDED PCB LAYOUT (TOP VIEW)



NOTES : 1 Specification:

- 1>.Operating force:10000gf Max
  - 2>.Operating Temperature: -40° to+85°
  - 3>.Storage Temperature: -40° to+85°
  - 4>.Mechanical Life:3000cycles minimum
  - 5>Electrical Life:2000cycles minimum
2. PLATING:  
GOLD FLASH 1u"(min.) SOLDER TAIL,  
3u" GOLD PLATING ON THE CONTACT AREA,  
WITH 50u" NICKEL UNDERPLATINGOVERALL.
  3. CONTACT RATING:  
1. SWITCHING: 25mA at 24VDC  
2. NON-SWITCHING: 100mA at 50VDC  
WITH 50u" NICKEL UNDERPLATINGOVERALL.

4. PART NUMBER DESCRIPTION :

DS XX I S G E T  
 [Packing: T=Tube R=Reel]  
 [Finish: F=3u" Gold-plated F=10u" Gold-plated]  
 [Finish: G=Full Gold S=Contact-Gold-plated]  
 [Terminal: S=SMD type B=Strait:.....]  
 [Actuator: T=Tape sealed S=Low profile W/O Tape L=Extension]  
 [HP=Half Pitch IC=IC type PV=Plano type]

Number	Part Name	Material	Finished
①	Actuator	UL94 V0	White
②	Cover	UL94 V0	Black
③	Movable	Copper Alloy	3u" Gold
④	Terminal	Brass	1u" Gold
⑤	Base	UL94 V0	Black
⑥	Terminal Contact	Brass	3u" Gold

TOLERANCE UNLESS OTHERWISE SPECIFIED		INSPECTION COPY	
LINER	ANGLES	PROJECTION	
0 ± 0.25	0 ± 2'		
.00 ± 0.15	.0 ± 1'		
.000± 0.10	.00± 0.5'		
DESIGN	kathy	03/20/12'	
DRAWING			
CHECK			
APPRO.			

东莞市广聚实业有限公司 Dongguan Kingtek Industrial Co., Ltd.			
TITLE			
BY DSPV SERIES PITCH 2.54mm			
PRODUCT FAMILY DSPV SERIES			
PRAT NO. DSPV091SGE1			
FILE NO.	DSPV091SGE1-A	SIZE	UNIT
SCALE		SHEET	REV.
Z : 1	TOP:1	A	

单击下面可查看定价，库存，交付和生命周期等信息

[>>KINGTEK\(广督\)](#)