

PRODUCT NO.	DSDP071HGET
RoHS compliant	

REV.	ECN NO.	DR	DATE

- Note:**
- All dimensions are in millimeters.
  - General tolerance:  $\pm 0.2\text{mm}$ .
  - Material:






- Base: UL94V-0 PBT Thermoplastic (Black).
- Cover: UL94V-0 PBT Thermoplastic (Black/Red/Blue).
- Actuators: UL94V-0 PBT Thermoplastic (White).
- Contact plating: Gold plating over nickel.
- Pitting material: Epoxy.

- Electrical
- Electrical: 2000 Operations per switch 24/VDC, 25mA.  
 Non-Switching Rating: 100mA, 50/VDC.  
 Switching Rating: 25mA, 24/VDC  
 Contact Resistance: 100 mΩ Max at Initial.

- Mechanical
- Mechanical life: 2000 Operations per switch.  
 Stroke: 30°.  
 Operation Temp: -20°C to 70°C.  
 Storage Temp: -40°C to 85°C.

**6. PART NUMBER DESCRIPTION:**

DS DP XX L H G E I

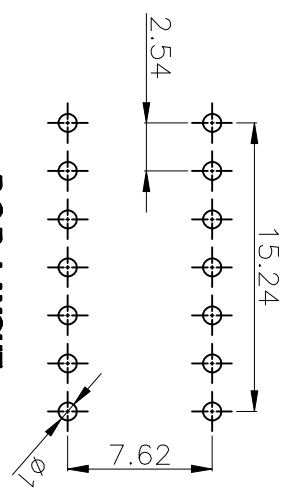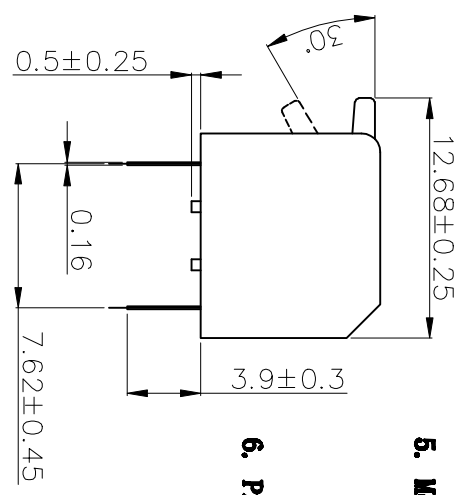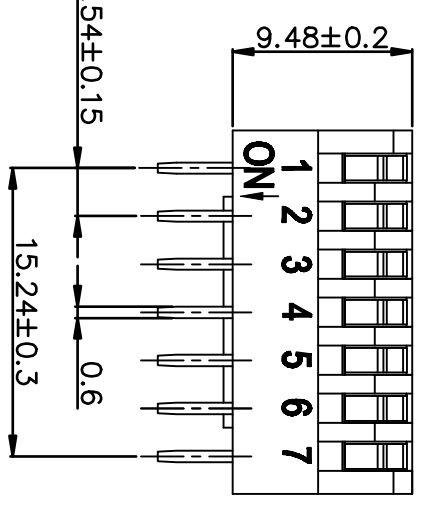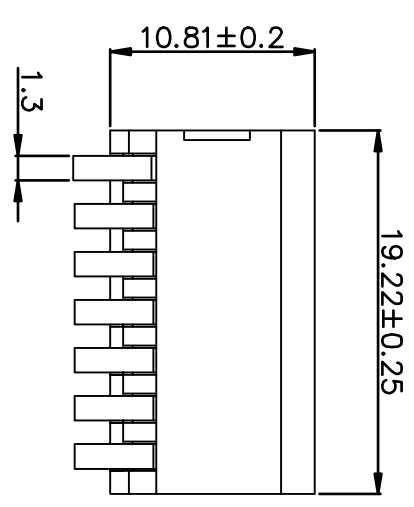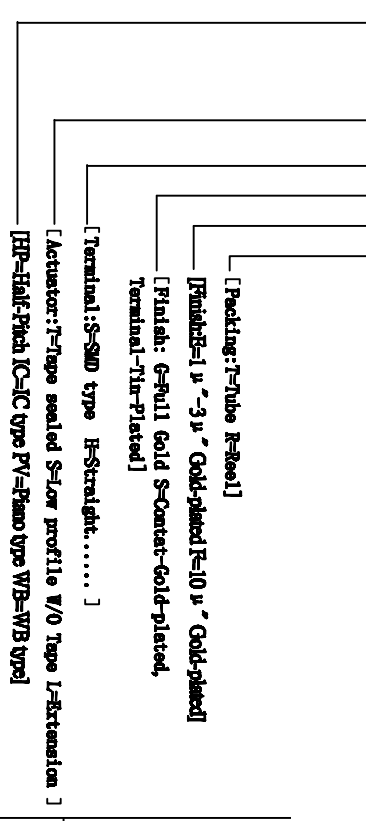

**P.C.B LAYOUT**

TOLERANCE UNLESS OTHERWISE SPECIFIED		INSTRUCTION	
LINE	ANGLES	CHPT	PROJECTION
0 ± 0.40	0 ± 1°		
.00 ± 0.30	.0 ± 0.5°		
.000 ± 0.20	.00 ±		
DRAWN	JUJ JR TIN	3013/07/08	
CHECK			
APPROV			
TITLE		BY DSDP SERIES PITCH 2.54mm	
PRODUCT FAMILY		DSDP SERIES	
PART NO.		DSDP071HGET	
DRAWING		REVISION-1	
FILE NO.	UNIT	SCALE	SHEET NO.
A4	mm	1:1	1 OF 1

**东莞市广誉实业有限公司**  
 Dongguan Kingtek Industrial Co., Ltd.

单击下面可查看定价，库存，交付和生命周期等信息

[>>KINGTEK\(广督\)](#)