


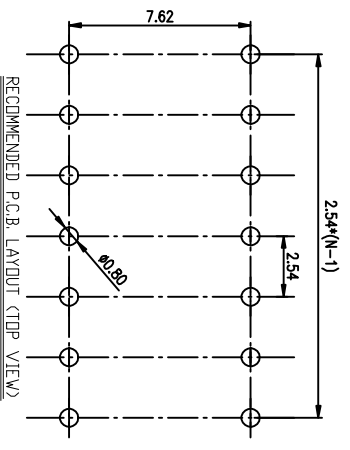
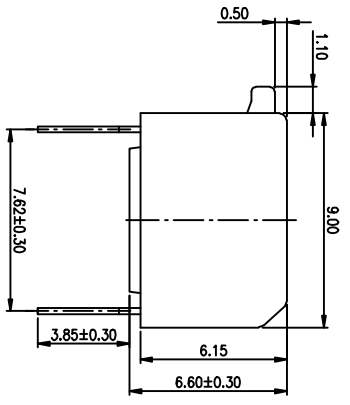


PRODUCT NO.	DSPV07LHGCT
RoHS compliant	

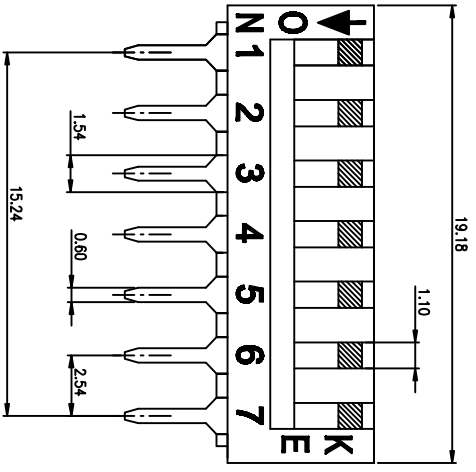

NOTES :

- 1.> Specification:
  - 1>.Operating force:1000gf Max
  - 2>.Operating Temperature: -40° to+85°
  - 3>.Storage Temperature: -40° to+85°
  - 4>.Mechanical Life: 3000cycles minimum
2. PLATING:
 

GOLD FLASH 1u"(min.) SOLDER TAIL,  
3u" GOLD PLATING ON THE CONTACT AREA,  
WITH 50u" NICKEL UNDERPLATING OVERALL.
3. CONTACT RATING:
  - 1.SWITCHING: 25mA at 24ADC
  - 2.NON-SWITCHING: 100mA at 50VDC WITH 50u" NICKEL UNDERPLATING OVERALL.
4. PART NUMBER DESCRIPTION :

DS XX I S G E T  
 [Packing: T=Tube R=Reel]  
 [Finish: E=3u" Gold-plated F=10u" Gold-plated]  
 [Finish: G=Full Gold S=Contact-Gold-plated]  
 [Terminal: S=SMD type H=Straight.....]  
 [Actuator: T=Tape sealed S=Low profile W/O Tape L=Extension]  
 [HP=Half-Pitch IC=IC type PV=Plano type]

Number	Part Name	Material	Finished
①	Actuator	UL94 V0	White
②	Cover	UL94 V0	Black
③	Movable	Copper Alloy	3u" Gold
④	Terminal	Brass	1u" Gold
⑤	Base	UL94 V0	Black
⑥	Terminal Contact	Brass	3u" Gold

TOLERANCE UNLESS OTHERWISE SPECIFIED	ANGLES	PROJECTION
0 ± 0.25	0 ± 2°	
.00 ± 0.15	.0 ± 1°	
.000 ± 0.10	.00 ± 0.5°	

INSPECTION COPY	2013/01/12
DESIGN	kathy
DRAWING	
CHECK	
APPRO.	

FILE NO.	DSPV07LHGCT-A
SIZE	A4
UNIT	mm
SCALE	2:1
SHEET	1
SHEET	1
REV.	A



东莞市广誉实业有限公司  
 Dongguan Kingtek Industrial Co., Ltd.

BY DSPV SERIES PITCH 2.54mm  
 PRODUCT FAMILY DSPV SERIES  
 PRAT NO. DSPV07LHGCT

单击下面可查看定价，库存，交付和生命周期等信息

[>>KINGTEK\(广督\)](#)