
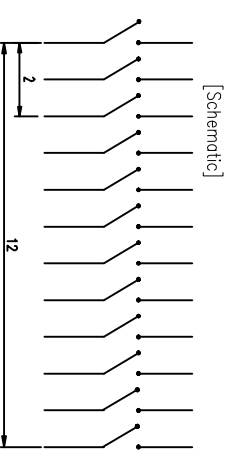
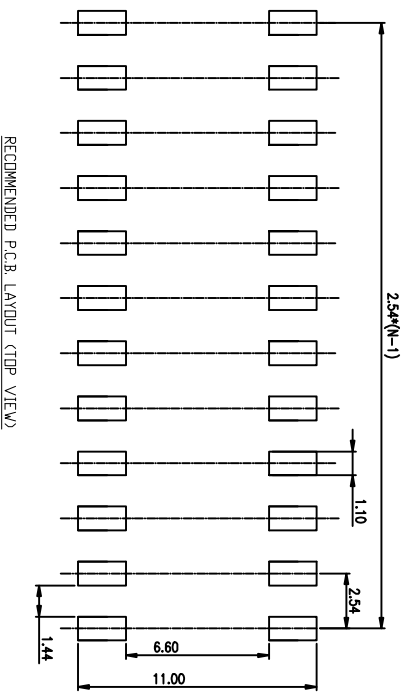

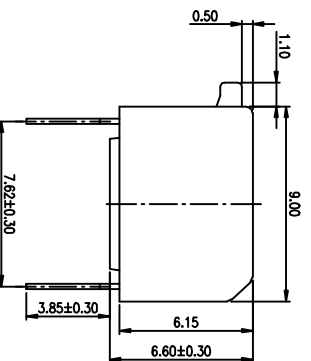


PRODUCT NO.	DSPV12LSGET
RohS compliant	

NOTES :

- 1.>Specification:
 - 1>.Operating force:1000gf Max
 - 2>.Operating Temperature: -40° to+85°
 - 3>.Storage Temperature: -40° to+85°
 - 4>.Mechanical Life: 3000cycles minimum
2. PLATING:
 - GOLD FLASH 1u"(min.) SOLDER TAIL,
 - 3u" GOLD PLATING ON THE CONTACT AREA,
 - WITH 50u" NICKEL UNDERPLATINGOVERALL.
3. CONTACT RATING:
 - 1.SWITCHING: 25mA at 24ADC
 - 2.NON-SWITCHING: 100mA at 50VDC
 - WITH 50u" NICKEL UNDERPLATINGOVERALL.
4. PART NUMBER DESCRIPTION :

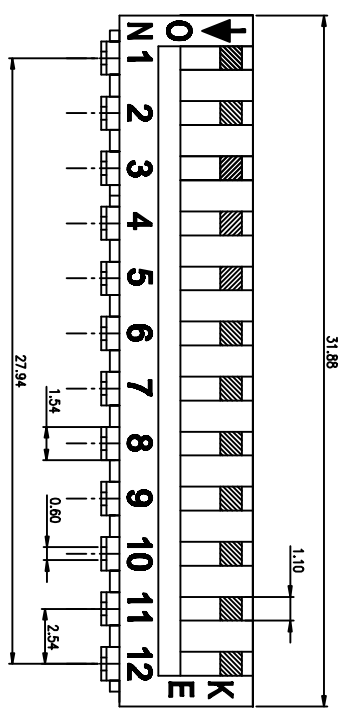

[Packaging: T=Tube R=Reel]
 [Finish: E=3u" Gold-plated F=10u" Gold-plated]
 [Finish: G=Full Gold S=Contact-Gold-plated]
 [Terminal: S=SMD type H=Straight.....]
 [Actuator: T=Tape sealed S=Low profile W/O Tape L=Extension]
 [HP=Half-Pitch IC=C type PV=Plano type]

RECOMMENDED PCB LAYOUT (TOP VIEW)

Number	Part Name	Material	Finished
①	Actuator	UL94 V0	White
②	Cover	UL94 V0	Black
③	Movable	Copper Alloy	3u" Gold
④	Terminal	Brass	1u" Gold
⑤	Base	UL94 V0	Black
⑥	Terminal Contact	Brass	3u" Gold

TOLERANCE UNLESS OTHERWISE SPECIFIED	ANGLES	PROJECTION
0 ± 0.25	0 ± 2°	
.00 ± 0.15	.0 ± 1°	
.000 ± 0.10	.00 ± 0.5°	

DESIGN	DRIVING	INSPECTION
kathy		COPY
		2013/01/12

FILE NO.	UNIT	SCALE	SHEET	REV.
DSPV12LSGET-A	mm	2:1	1	A

东莞市广聚实业有限公司
 Dongguan Kingtek Industrial Co., Ltd.

TITLE
 BY DSPV SERIES PITCH 2.54mm

PRODUCT FAMILY DSPV SERIES
 PRAT NO. DSPV12LSGET

SIZE A4
 SHEET 1

单击下面可查看定价，库存，交付和生命周期等信息

[>>KINGTEK\(广督\)](#)