

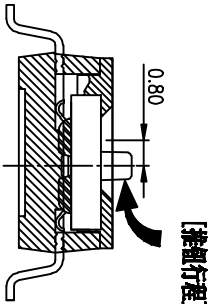
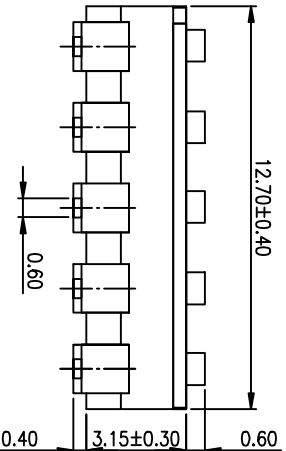
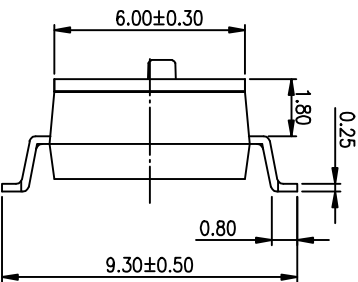
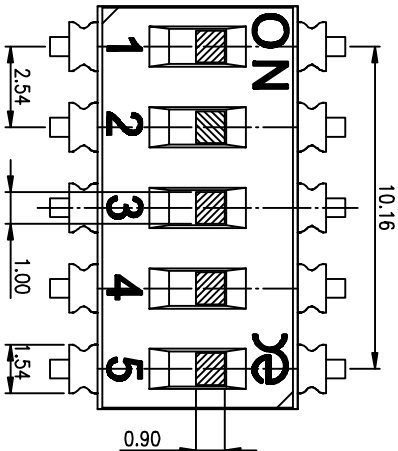



PRODUCT NO.	1
DISC05L SGET	RAIS compliant



(Construction)




[Schematic]

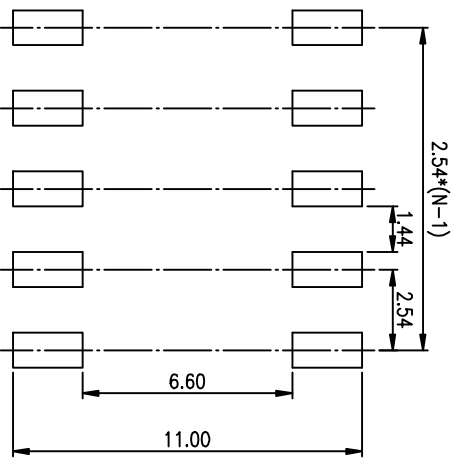

RECOMMENDED P.C.B. LAYOUT (TOP VIEW)

- NOTES :
- 1.> Specification:
 - 1> Operating force: 1000gf Max
 - 2> Operating Temperature: -40° to+85°
 - 3> Storage Temperature: -40° to+85°
 - 4> Mechanical Life: 3000cycles minimum
 - 5> Electrical Life: 2000cycles minimum
 2. PLATING:
 - GOLD FLASH 1u"(min.) SOLDER TAIL,
 - 3u" GOLD PLATING ON THE CONTACT AREA,
 - WITH 50u" NICKEL UNDERPLATING OVERALL.

3. PART NUMBER DESCRIPTION

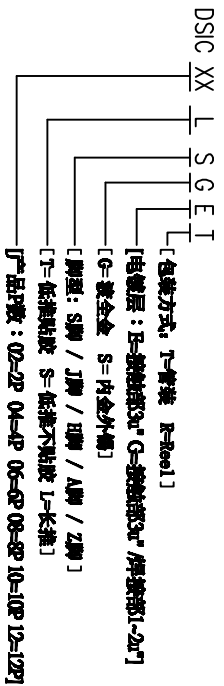

Number	Part Name	Material	Finished
①	Actuator	UL94 V0	White
②	Cover	UL94 V0	Black
③	Movable	Copper Alloy	3u"Gold
④	Terminal	Brass	1u"Gold
⑤	Base	UL94 V0	Black
⑥	Terminal Contact	Brass	3u"Gold

TOLERANCE UNLESS OTHERWISE SPECIFIED		INSPECTION COPY	
LINER	ANGLES	PROJECTION	COPY
0 ± 0.25	0 ± 2'		
.00 ± 0.15	.0 ± 1'		
.000 ± 0.10	.00 ± 0.5'		
DESIGN	kathy	2012/04/12	
DRAWING			
CHECK			
APPRO.			

东莞市广誉实业有限公司 Dongguan Kingtek Industrial Co., Ltd.			
TITLE			
BY DISC SERIES PITCH 2.54mm			
PRODUCT FAMILY DISC SERIES			
FILE NO.	DISC05L SGET		
SIZE	UNIT	SCALE	SHEET
A4	mm	2 : 1	1 OF 1

单击下面可查看定价，库存，交付和生命周期等信息

[>>KINGTEK\(广督\)](#)