

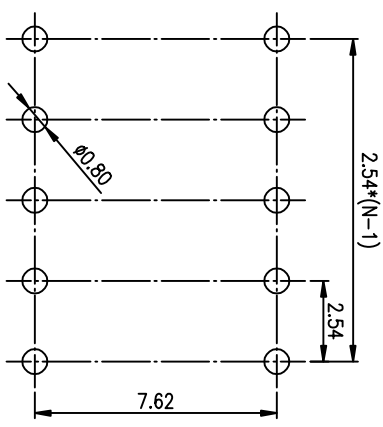
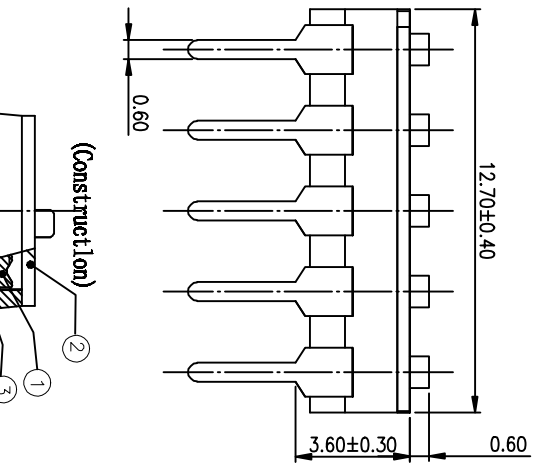
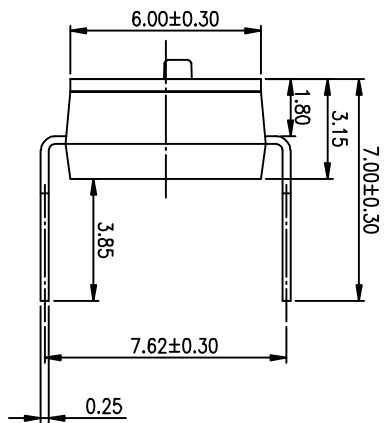



PRODUCT NO.	DISCOSLHGET
NO.	RoHS compliant

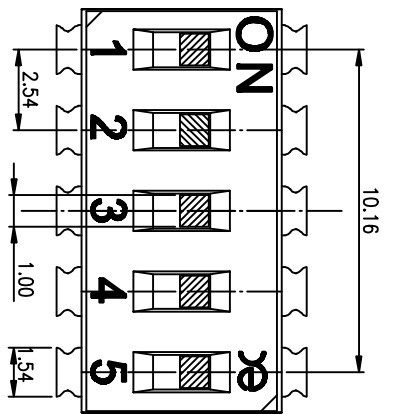

RECOMMENDED P.C.B. LAYOUT (TOP VIEW)




[Schematic]

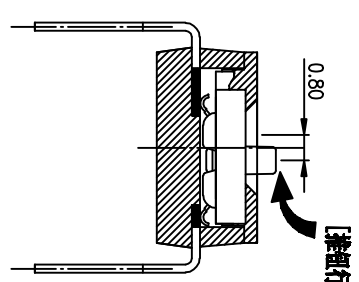

[推板行程]

- NOTES :
- 1> Specification:
 - 1> Operating force: 1000gf Max
 - 2> Operating Temperature: -40° to +85°
 - 3> Storage Temperature: -40° to +85°
 - 4> Mechanical Life: 3000cycles minimum
 - 5> Electrical Life: 2000cycles 25mA 24VDC
 2. PLATING:
 - GOLD FLASH 1u"(min.) SOLDER TAIL,
 - 3u" GOLD PLATING ON THE CONTACT AREA,
 - WITH 50u" NICKEL UNDERPLATING OVERALL.

3. PART NUMBER DESCRIPTION

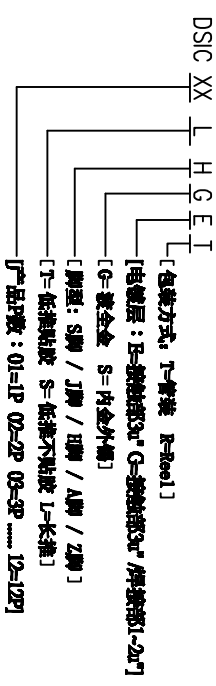

TOLERANCE UNLESS OTHERWISE SPECIFIED		INSPECTION COPY	
LINER	ANGLES	PROJECTION	
0 ± 0.25	0. ± 2'		
.00 ± 0.15	.0 ± 1'		
.000 ± 0.10	.00 ± 0.5'		
DESIGN	kathy	2012/04/12	
DRAWING			
CHECK			
APPRO.			
FILE NO.	DISCOSLHGET-A	PRODUCT FAMILY	DISC SERIES
SIZE	UNIT SCALE	PRAT NO.	DISCOSLHGET
mm	2 : 1		
SHEET	REV.		
A4	A		

东莞市一德实业有限公司
Dongguan Kingtek Industrial Co., Ltd.

BY DISC SERIES PITCH 2.54mm

单击下面可查看定价，库存，交付和生命周期等信息

[>>KINGTEK\(广督\)](#)