


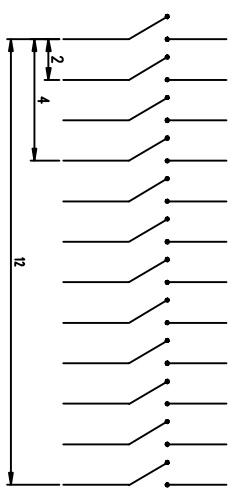
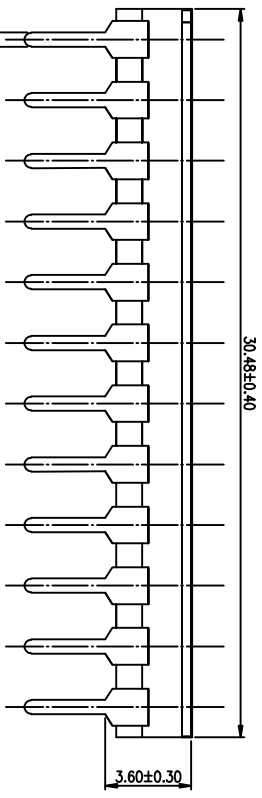
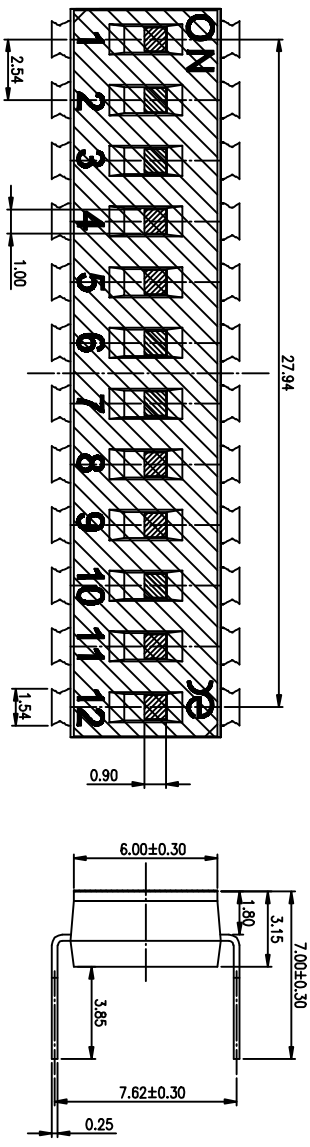



<b>PRODUCT NO.</b> DSIC12THGET	<b>NO.</b> RoHS compliant
-----------------------------------	------------------------------

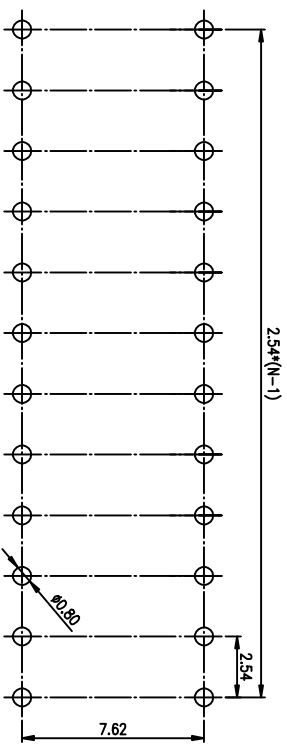

- NOTES :
- Specification:
    - Operating force: 1000gf Max
    - Operating Temperature: -40° to +85°
    - Storage Temperature: -40° to +85°
    - Mechanical Life: 3000cycles minimum
    - Electrical Life: 2000cycles 25mA 24VDC
  - PLATING:
    - GOLD FLASH 1u"(min.) SOLDER TAIL,
    - 3u" GOLD PLATING ON THE CONTACT AREA,
    - WITH 50u" NICKEL UNDERPLATING OVERALL.
  - PART NUMBER DESCRIPTION

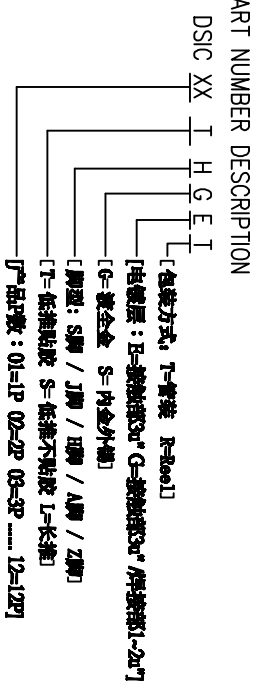

**RECOMMENDED P.C.B. LAYOUT (TOP VIEW)**



Number	Part Name	Material	Finished
①	Actuator	UL94 VO	White
②	Cover	UL94 VO	Black
③	Movable	Copper Alloy	3u"Gold
④	Terminal	Brass	1u"Gold
⑤	Base	UL94 VO	Black
⑥	Terminal Contact	Brass	3u"Gold
⑦	Mylar	UL94 VO	0.05mm

TOLERANCE UNLESS OTHERWISE SPECIFIED		INSPECTION COPY	
LINER	ANGLES	PROJECTION	
0 ± 0.25	0. ± 2'		TITLE
.00 ± 0.15	.0 ± 1'		
.000 ± 0.10	.00 ± 0.5'	DESIGN	2012/04/12
DRAWING		PRAT NO.	DSIC12HGET
CHECK		FILE NO.	DSIC12HGET-A
APPRO.		SIZE	UNIT SCALE SHEET REV.
		A4	mm 2 : 1 10F-1 A

**RE 东莞市 睿尔电子有限公司**  
Dongguan Kingtek Industrial Co., Ltd.

BY DSIC SERIES PITCH 2.54mm  
PRODUCT FAMILY DSIC SERIES

单击下面可查看定价，库存，交付和生命周期等信息

[>>KINGTEK\(广督\)](#)