

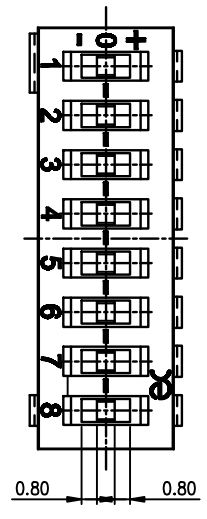

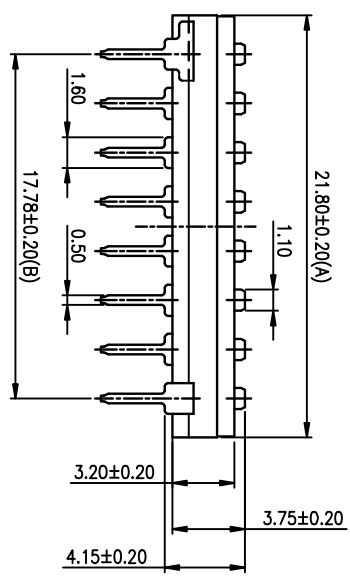



PRODUCT NO. DSDT08LHG1ET
RoHS compliant



POS.	DIMENSIONS	
	A	B
4P	11.64	7.62
5P	14.18	10.16
8P	21.80	17.78
9P	24.34	20.32
10P	26.88	22.86

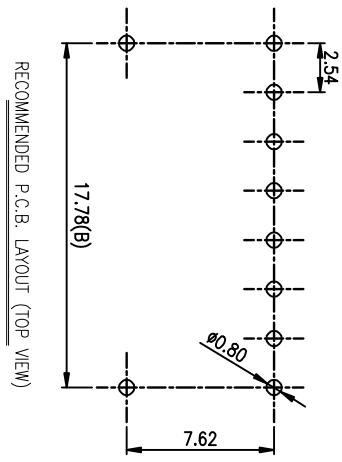

Number	Part Name	Material	Finished
①	Actuator	UL94 V0	White
②	Cover	UL94 V0	Black
③	Movable	Copper Alloy	3u"Gold
④	Terminal	Brass	1u"Gold
⑤	Base	UL94 V0	Black
⑥	Terminal Contact	Brass	3u"Gold

TOLERANCE UNLESS OTHERWISE SPECIFIED		INSPECTION COPY	
LINER	ANGLES	PROJECTION	
0 ± 0.25	0. ± 2'		
.00 ± 0.15	.0 ± 1'		
.000 ± 0.10	.00 ± 0.5'		
DESIGN	CHI HUAI HE	2015/01/22	
DRAWING			
CHECK			
APPRO.			
BY DSDT SERIES PITCH 2.54mm		FILE NO. DSDT08LHG1ET-A	
PRODUCT FAMILY DSDT SERIES		SIZE UNIT SCALE SHEET REV.	
PRAT NO. DSDT08LHG1ET		A4 mm 1 : 1 10F 1 A	

东莞市广誉实业有限公司
Dongguan Kingtek Industrial Co., Ltd.

[SCHEMATIC]

3. PART NUMBER DESCRIPTION

DSDT XX L H G E T

- [包装方式: L=管装 R=Reel]
- [电鍍层: E=接触部3u" G=接触部3u" /焊接触部1-2u"]
- [G=镀金 S=内金外镀]
- [脚型: S脚 / J脚 / H脚 / A脚 / Z脚]
- [T=低推贴胶 S=低推不贴胶 L=长推]
- [产品P数: 08-8P]

2. PLATING:

GOLD FLASH 1u"(min.) SOLDER TAIL,
3u" GOLD PLATING ON THE CONTACT AREA,
WITH 50u" NICKEL UNDERPLATING OVERALL.

1>.Initial: 50mOhm Max.
2>.After Life Test: 100mOhm Max.

Contact Resistance:

1>.Switching: 25mA, 24VDC
2>.Non Switching: 100mA, 50VDC

Contact Rating:

1>.Operating force: 1000gf/ Max
2>.Mechanical Life: 3000cycles minimum
3>.Electrical Life: 2000cycles minimum

1. Specification:

NOTES :

REV.	ECN NO.	DR	DATE
A	New	H H	14/12/31

单击下面可查看定价，库存，交付和生命周期等信息

[>>KINGTEK\(广督\)](#)