

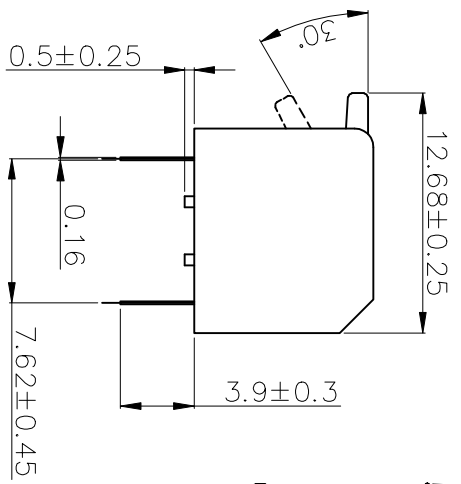
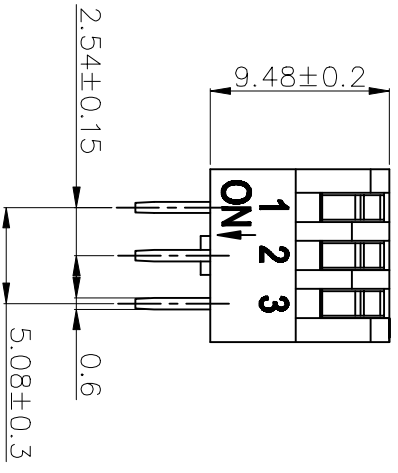


PRODUCT NO.	DSDP031H3E1
RoHS compliant	

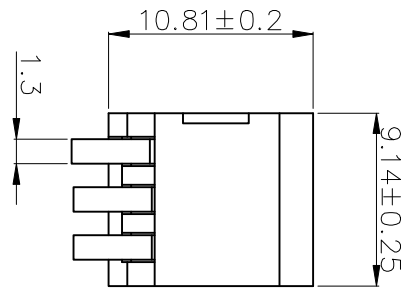

- Note:**
- All dimensions are in millimeters.
 - General tolerance: $\pm 0.2\text{mm}$.
 - Material:


- Base: UL94V-0 PBT Thermoplastic (Black).
- Cover: UL94V-0 PBT Thermoplastic (Black/Red/Blue).
- Actuators: UL94V-0 PBT Thermoplastic (White).
- Contact plating: Gold plating over nickel.
- Pitting material: Epoxy.

- Electrical
- Electrical: 2000 Operations per switch 24/VDC, 25mA.
- Non-Switching Rating: 100mA, 50/VDC.
- Switching Rating: 25mA, 24/VDC
- Contact Resistance: 100 mΩ Max. at initial.

- Mechanical
- Mechanical life: 2000 Operations per switch.
- Stroke: 30°
- Operation Temp: -20°C to 70°C.
- Storage Temp: -40°C to 85°C.

6. PART NUMBER DESCRIPTION:

DS DP XX L H G E I

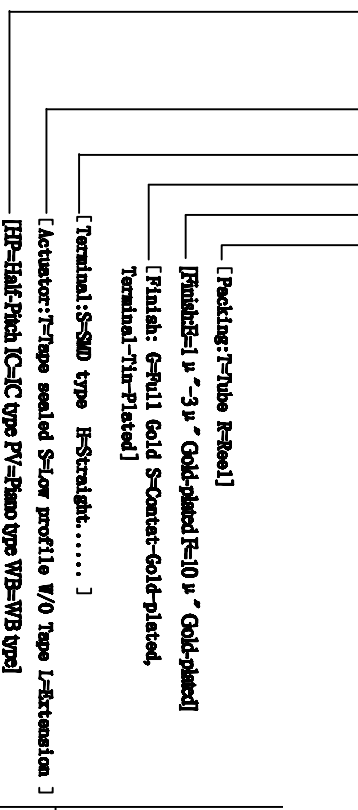

TOLERANCE UNLESS OTHERWISE SPECIFIED		INSTRUCTION	
LINE	ANGLES	CHPT	PROJECTION
0 ± 0.40	0 ± 1°		
.00 ± 0.30	.0 ± 0.5°		
.000 ± 0.20	.00 ±		
DRAWING	DATE	DESIGNER	DATE
	2013/07/02		
PRODUCT FAMILY		PART NO.	
DSDP SERIES		DSDP031H3E1	
DRAWING		REVISION	
A4		A	

东莞市广誉实业有限公司
Dongguan Kingtek Industrial Co., Ltd.

单击下面可查看定价，库存，交付和生命周期等信息

[>>KINGTEK\(广督\)](#)