
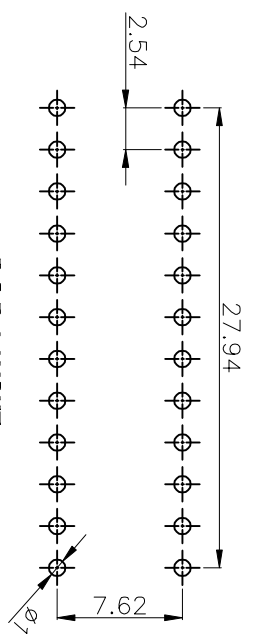
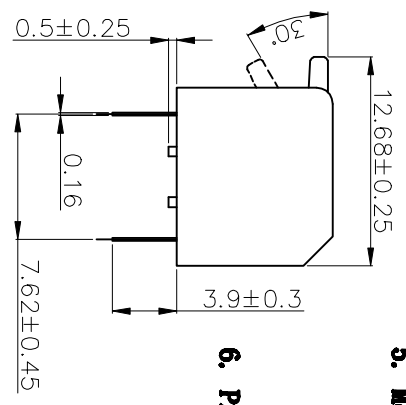
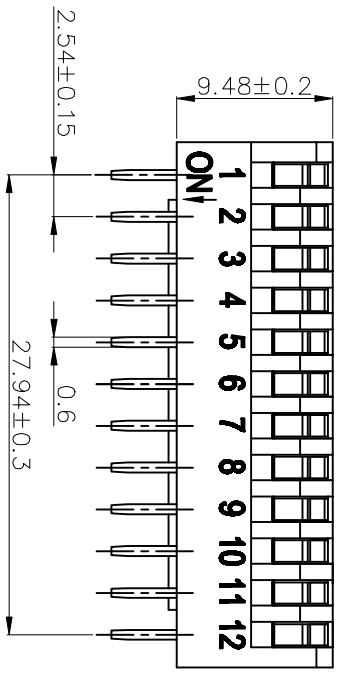


PRODUCT NO.	RoHS compliant
DSDP121HCFT	

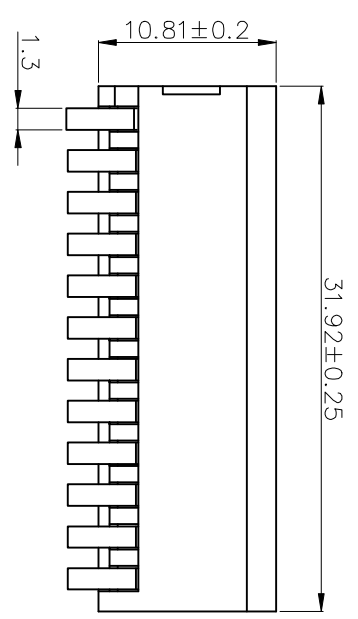

PC.B LAYOUT

- Note:**
- All dimensions are in millimeters.
  - General tolerance:  $\pm 0.2\text{mm}$ .
  - Material:

- Base: UL94V-0 PBT Thermoplastic (Black).
- Cover: UL94V-0 PBT Thermoplastic (Black/Red/Blue).
- Actuators: UL94V-0 PBT Thermoplastic (White).
- Contact plating: Gold plating over nickel.
- Pitting material: Epoxy.

- Electrical
- Electrical: 2000 Operations per switch 24/VDC, 25mA.
  - Non-Switching Rating: 100mA, 50/VDC.
  - Switching Rating: 25mA, 24/VDC
  - Contact Resistance: 100 mΩ Max. at initial.

- Mechanical
- Mechanical life: 2000 Operations per switch.
  - Stroke: 30°
  - Operation Temp: -20°C to 70°C.
  - Storage Temp: -40°C to 85°C.

**6. PART NUMBER DESCRIPTION:**

DS DP XX L H G E I

- [Packing: T-Tube R-Seal]
- [Finish: 1 μ " 3 μ " Gold-plated R=10 μ " Gold-plated]
- [Finish: 6-Full Gold S-Contact-Gold-plated, Terminal-Tin-Plated]
- [Terminal: S-SMD type H-Straight.....]
- [Actuator: T-Tape sealed S=for profile W/O Tape L=Extension]
- [HP=Half-Pitch IC=IC type PV=Plano type WB=WB type]

TOLERANCE UNLESS OTHERWISE SPECIFIED		INSTRUCTION	
LINE	ANGLES	CHPT	PROJECTION
0 ± 0.40	0 ± 1°		
.00 ± 0.30	.0 ± 0.5°		
.000 ± 0.20	.00 ±		
DESIGNER	JUJ ER TIN	DATE	2013/07/02
DRAWING			
CHECK			
APPROV			
TITLE		BY DSDP SERIES PITCH 2.54mm	
PRODUCT FAMILY		DSDP SERIES	
PART NO.		DSDP121HCFT	
DRAWING NO.		DSDP121HCFT-1	
SIZE	UNIT	SCALE	REV.
A4	MM	1:1	A

**东莞市广誉实业有限公司**  
Dongguan Kingtek Industrial Co., Ltd.

单击下面可查看定价，库存，交付和生命周期等信息

[>>KINGTEK\(广督\)](#)