

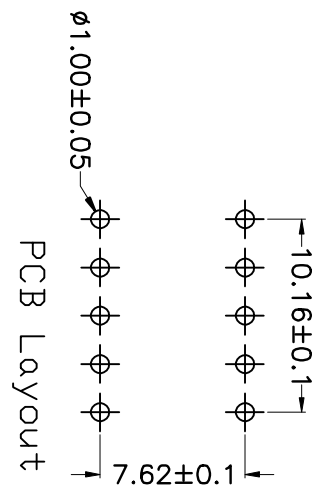
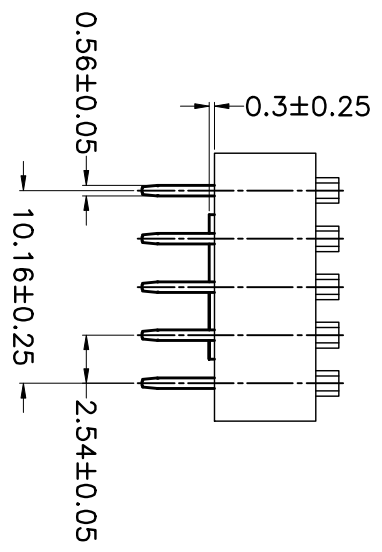
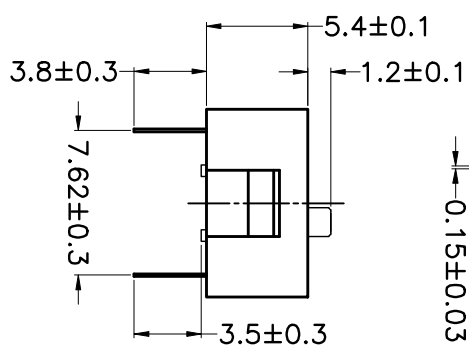



PRODUCT NO. DSWB05LHGCT  
RoHS compliant



- Note:**
1. All dimensions are in millimeters.
  2. General tolerance:  $\pm 0.2\text{mm}$ .
  3. Material:


Base: UL94V-0 PBT Thermoplastic (Black).  
 Cover: UL94V-0 PBT Thermoplastic (Black/Red/Blue).  
 Actuators: UL94V-0 PA66 Thermoplastic (White).  
 Contact plating: Gold plating over nickel.  
 Pitting material: Epoxy.

**4. Electrical**  
 Electrical: 2000 Operations per switch 24/VDC, 25mA.  
 Non-Switching Rating: 100mA, 50/VDC.  
 Switching Rating: 25mA, 24/VDC  
 Contact Resistance: 100 mΩ Max at initial.

**5. Mechanical**  
 Mechanical life: 2000 Operations per switch.  
 Stroke: 2.0mm.  
 Operation Temp: -20°C to 70°C.  
 Storage Temp: -40°C to 85°C.

**6. PART NUMBER DESCRIPTION:**

DS WB 05 L H G E T

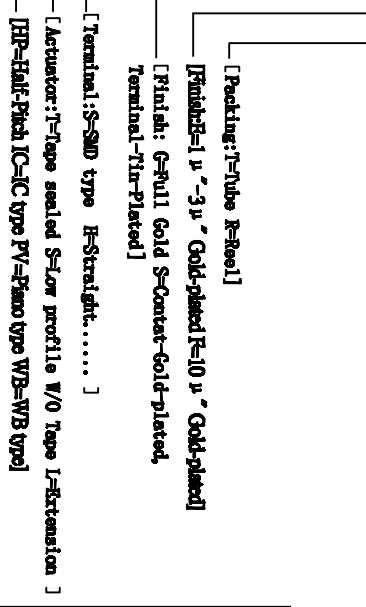

TOLERANCE UNLESS OTHERWISE SPECIFIED		INSPECTION COPY	
LINER	ANGLES	PROJECTION	
0 ± 0.30	0 ± 1°	[Symbol]	
.00 ± 0.20	.0 ± 0.5°	[Symbol]	
.000 ± 0.10	.00 ±	[Symbol]	
DESIGN	LU ER XIN	2013/07/02	
DRAWING			
CHECK			
APPRO.			
TITLE		BY DSWB SERIES PITCH 2.54mm	
PRODUCT FAMILY DSWB SERIES		PRAT NO. DSWB05LHGCT	
FILE NO.	DSWB05LHGCT-A	SIZE	UNIT
CHECK	SCALE	SHEET	REV.
A4	mm	FT	TOP-1 A

单击下面可查看定价，库存，交付和生命周期等信息

[>>KINGTEK\(广督\)](#)