

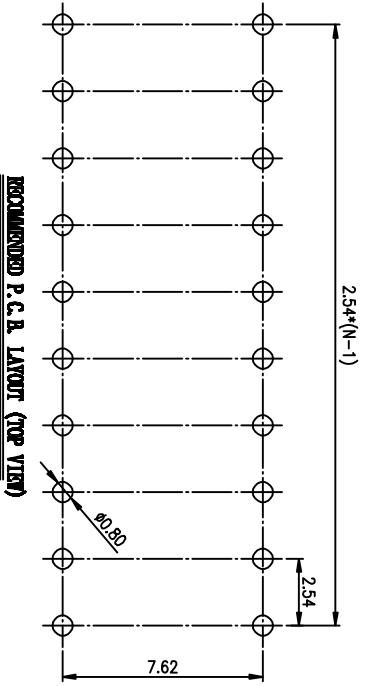


- NOTES :
- Specification:
 - Operating force: 1000gf Max
 - Operating Temperature: -40° to +85°
 - Storage Temperature: -40° to +85°
 - Mechanical Life: 3000cycles minimum
 - Electrical Life: 2000cycles 25mA 24VDC
 - PLATING:
 - GOLD FLASH 1u"(min.) SOLDER TAIL,
 - 3u" GOLD PLATING ON THE CONTACT AREA,
 - WITH 50u" NICKEL UNDERPLATING OVERALL.

3. PART NUMBER DESCRIPTION

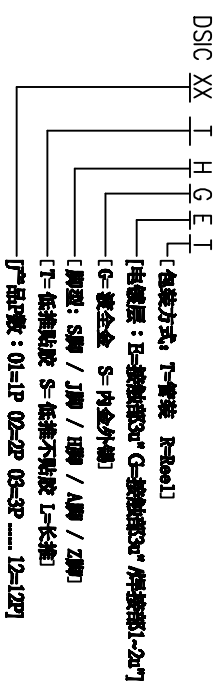

RECOMMENDED P.C.B. LAYOUT (TOP VIEW)



Number	Part Name	Material	Finished
①	Actuator	UL94 VO	White
②	Cover	UL94 VO	Black
③	Movable	Copper Alloy	3u"Gold
④	Terminal	Brass	1u"Gold
⑤	Base	UL94 VO	Black
⑥	Terminal Contact	Brass	3u"Gold
⑦	Mylar	UL94 VO	0.05mm

TOLERANCE UNLESS OTHERWISE SPECIFIED		INSPECTION COPY
LINER	ANGLES	PROJECTION
0 ± 0.25	0. ± 2'	
.00 ± 0.15	.0 ± 1'	
.000 ± 0.10	.00 ± 0.5'	
DESIGN	DATE	
DRAWING	2012/04/12	
CHECK		
APPRO.		



FILE NO.	DISC10THGET-A
SIZE	UNIT SCALE
A4	mm
2 : 1	10F-1
	A

单击下面可查看定价，库存，交付和生命周期等信息

[>>KINGTEK\(广督\)](#)