
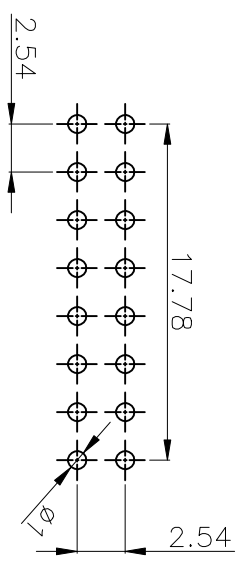
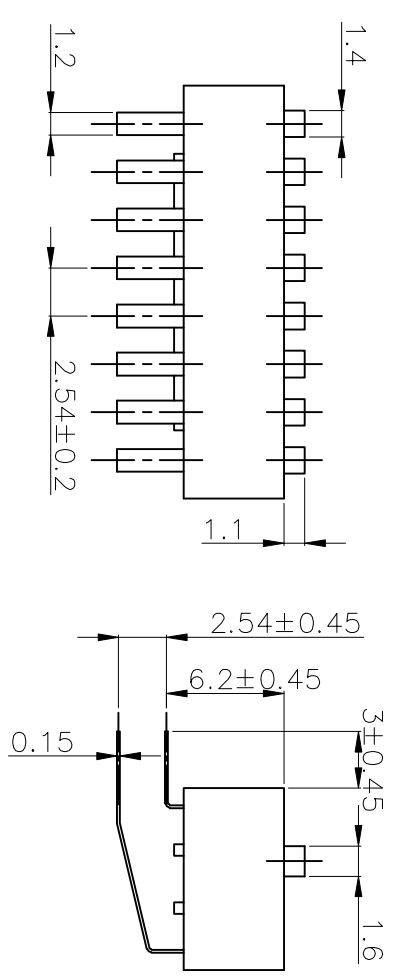


PRODUCT NO.	DSDA08LHGET
RoHS compliant	

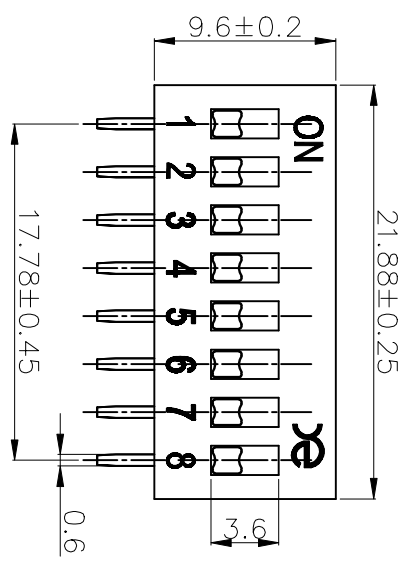


- Note:**
- All dimensions are in millimeters.
 - General tolerance: $\pm 0.2\text{mm}$.
 - Material:

- Base: UL94V-0 PBT Thermoplastic (Black).
- Cover: UL94V-0 PBT Thermoplastic (Black/Red/Blue).
- Actuators: UL94V-0 PA66 Thermoplastic (White).
- Contact plating: Gold plating over nickel.
- Pitting material: Epoxy.

- Electrical
 - Electrical: 2000 Operations per switch 24/VDC, 25mA.
 - Non-Switching Rating: 100mA, 50/VDC.
 - Switching Rating: 25mA, 24/VDC
 - Contact Resistance: 100 mΩ Max. at initial.
- Mechanical
 - Mechanical life: 2000 Operations per switch.
 - Stroke: 2.0mm.
 - Operation Temp: -20°C to 70°C.
 - Storage Temp: -40°C to 85°C.

6. PART NUMBER DESCRIPTION:

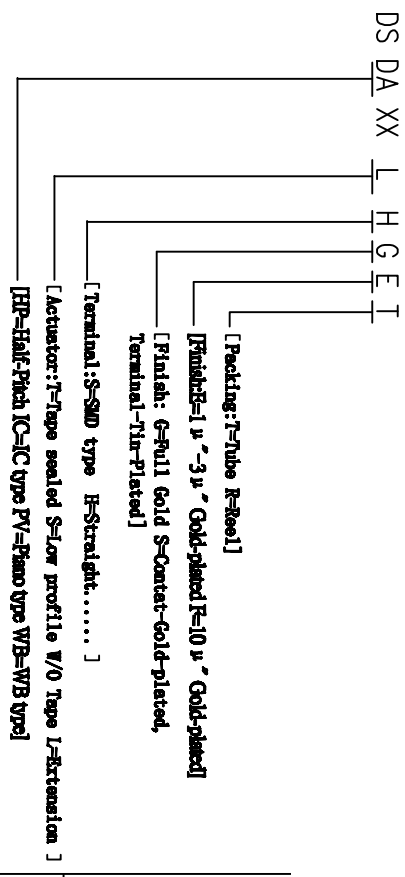

TOLERANCE UNLESS OTHERWISE SPECIFIED		INSTRUCTION	
LINE	ANGLES	CHPT	PROJECTION
0 ± 0.40	0 ± 1°		
.00 ± 0.30	.0 ± 0.5°		
.000 ± 0.20	.00 ±		
DRAWING	DATE	DESIGNER	DATE
		LIU ER TIAN	2013/07/02
TITLE		DRAWING NO.	
BY DSDA SERIES PITCH 2.54mm		DSDA08LHGET	
PRODUCT FAMILY		FILE NO.	
DSDA SERIES		DSDA08LHGET-1	
PART NO.		SIZE	
DSDA08LHGET		UNIT	
SCALE		SCALE	
SERIAL		SERIAL	
REV.		REV.	
A4		A4	

东莞市广普实业有限公司
Dongguan Kingtek Industrial Co., Ltd.

单击下面可查看定价，库存，交付和生命周期等信息

[>>KINGTEK\(广督\)](#)