

PRODUCT NO.	RoHS compliant
DSDP081HCJET	

REV.	ECN NO.	DR	DATE






- Note:**
- All dimensions are in millimeters.
  - General tolerance:  $\pm 0.2\text{mm}$ .
  - Material:

- Base: UL94V-0 PBT Thermoplastic (Black).
- Cover: UL94V-0 PBT Thermoplastic (Black/Red/Blue).
- Actuators: UL94V-0 PBT Thermoplastic (White).
- Contact plating: Gold plating over nickel.
- Pitting material: Epoxy.

- Electrical
- Electrical: 2000 Operations per switch 24/VDC, 25mA.  
 Non-Switching Rating: 100mA, 50/VDC.  
 Switching Rating: 25mA, 24/VDC  
 Contact Resistance: 100 mΩ Max at Initial.

- Mechanical
- Mechanical life: 2000 Operations per switch.  
 Stroke: 30°  
 Operation Temp: -20°C to 70°C.  
 Storage Temp: -40°C to 85°C.

**6. PART NUMBER DESCRIPTION:**

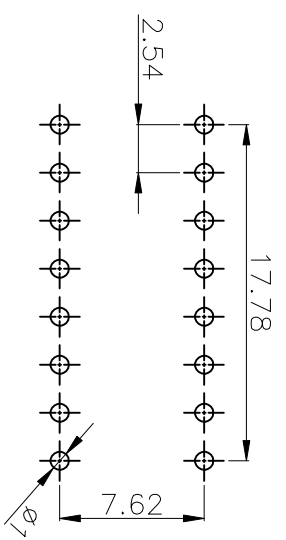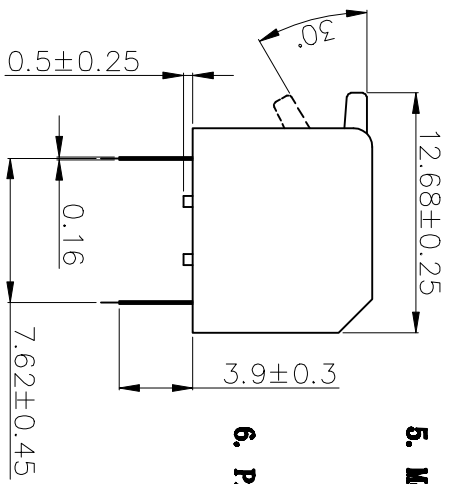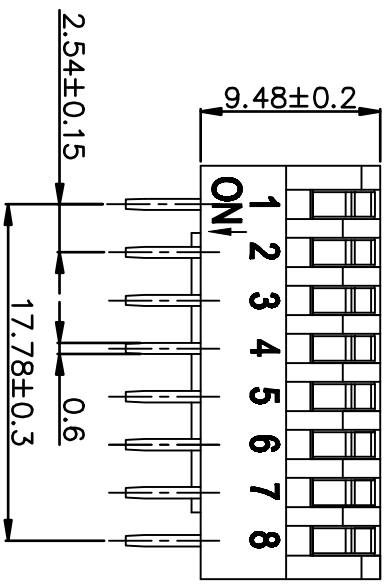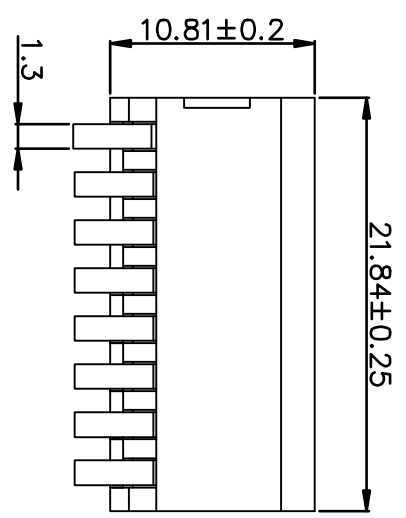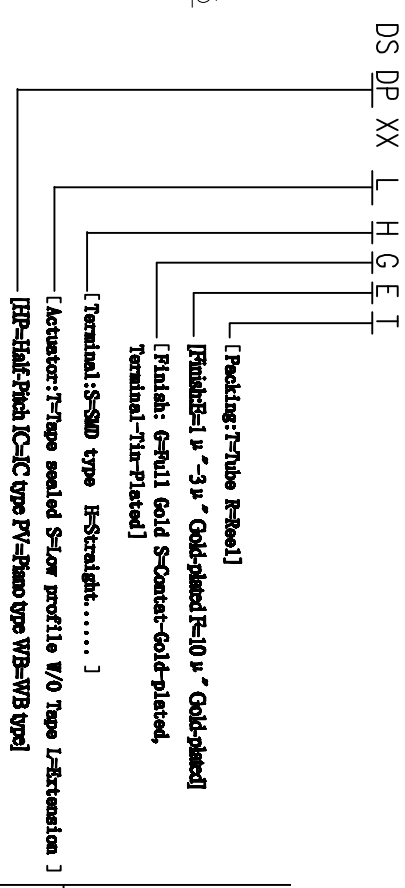

**P.C.B LAYOUT**

TOLERANCE UNLESS OTHERWISE SPECIFIED		INSPECTION	
LINE	ANGLES	CHK	PROJECTION
0 ± 0.40	0 ± 1°		
.00 ± 0.30	.0 ± 0.5°		
.000 ± 0.20	.00 ±		
DESIGN	UJI ER TIN	DATE	30/13/07/08
DRAWING			
CHK			
APPD			
TITLE		BY DSDP SERIES PITCH 2.54mm	
PRODUCT FAMILY		DSDP SERIES	
PART NO.		DSDP081HCJET	
DRAWING NO.		DRAWING-1	
SIZE	UNIT	SCALE	SECT
A4	MM	1:1	10F-1

**东莞市广普实业有限公司**  
 Dongguan Kingtek Industrial Co., Ltd.

单击下面可查看定价，库存，交付和生命周期等信息

[>>KINGTEK\(广督\)](#)