
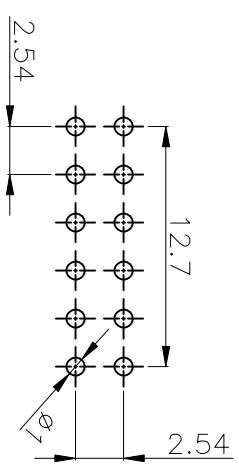
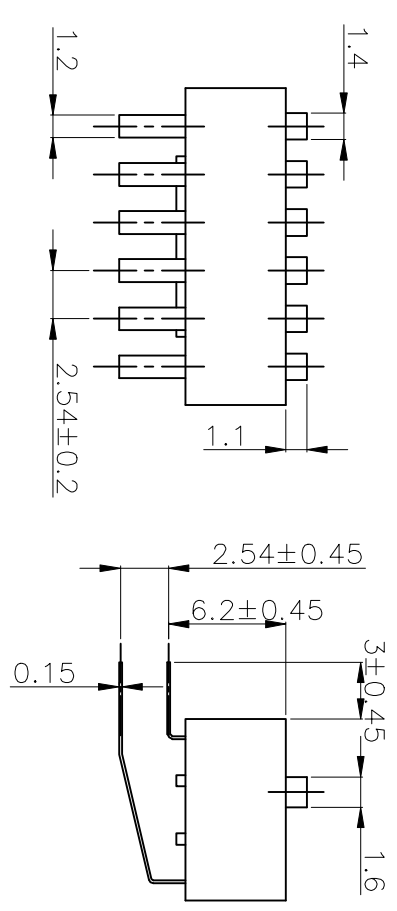


PRODUCT NO.	DSDA061HERFET
RoHS compliant	

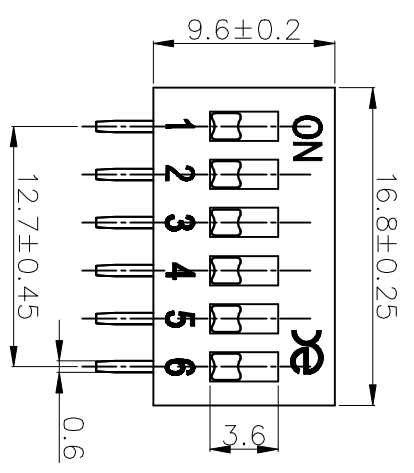

- Note:**
- All dimensions are in millimeters.
 - General tolerance: $\pm 0.2\text{mm}$.
 - Material:


- Base: UL94V-0 PBT Thermoplastic (Black).
- Cover: UL94V-0 PBT Thermoplastic (Black/Red/Blue).
- Actuators: UL94V-0 PA66 Thermoplastic (White).
- Contact plating: Gold plating over nickel.
- Pitting material: Epoxy.

- Electrical
 - Electrical: 2000 Operations per switch 24/VDC, 25mA.
 - Non-Switching Rating: 100mA, 50/VDC.
 - Switching Rating: 25mA, 24/VDC
 - Contact Resistance: 100 mΩ Max. at initial.

- Mechanical
 - Mechanical life: 2000 Operations per switch.
 - Stroke: 2.0mm.
 - Operation Temp: -20°C to 70°C.
 - Storage Temp: -40°C to 85°C.

6. PART NUMBER DESCRIPTION:

DS DA XX L H G E I

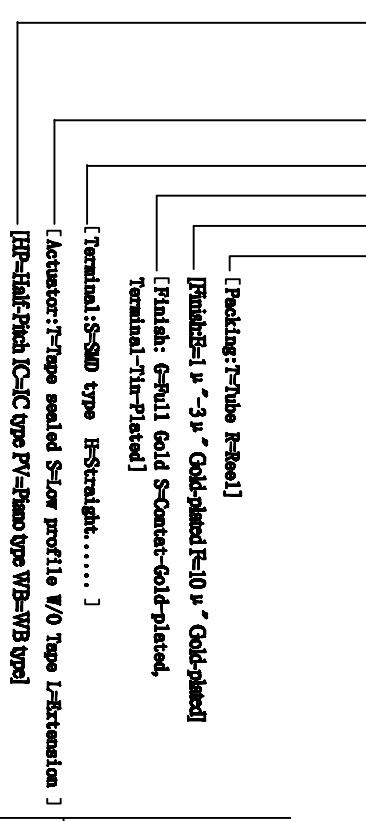

TOLERANCE UNLESS OTHERWISE SPECIFIED	LINE	ANGLES	PROJECTION	INSTRUCTION
0 ± 0.40	0 ± 1°			
.00 ± 0.30	.0 ± 0.5°			
.000 ± 0.20	.00 ±			
DESIGN	UJI ER TIN		3013/07/08	
DRAWING				
CHECK				
APPROV				

		东莞市广誉实业有限公司 Dongguan Kingtek Industrial Co., Ltd.	
TITLE		BY DSDA SERIES PITCH 2.54mm	
PRODUCT FAMILY		DSDA SERIES	
PART NO.		DSDA061HERFET	
FILE NO.	UNIT	SCALE	REV.
A4	mm	1:1	A

单击下面可查看定价，库存，交付和生命周期等信息

[>>KINGTEK\(广督\)](#)