

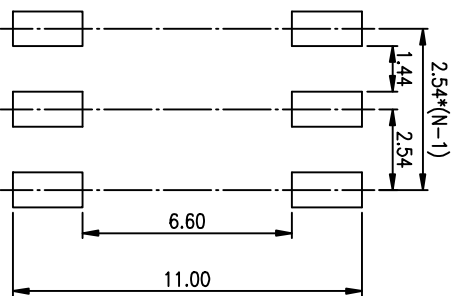
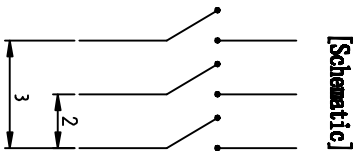
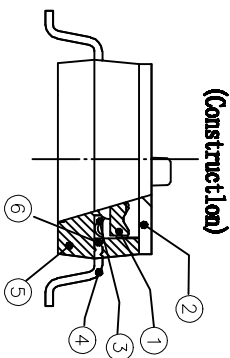

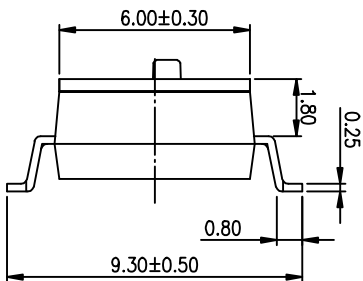


PRODUCT NO.	DISCO31SGE1
NO.	RoHS compliant

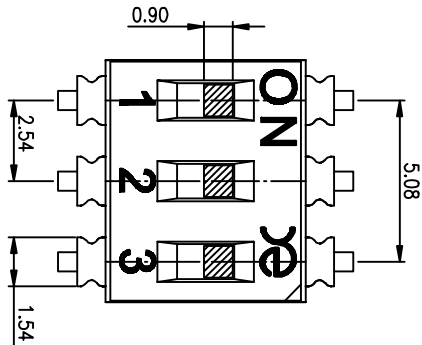

**RECOMMENDED P.C.B. LAYOUT (TOP VIEW)**



- NOTES :
- 1> Specification:
    - 1> Operating force: 1000gf Max
    - 2> Operating Temperature: -40° to+85°
    - 3> Storage Temperature: -40° to+85°
    - 4> Mechanical Life: 3000cycles minimum
    - 5> Electrical Life: 2000cycles minimum
  2. PLATING:
    - GOLD FLASH 1u"(min.) SOLDER TAIL,
    - 3u" GOLD PLATING ON THE CONTACT AREA,
    - WITH 50u" NICKEL UNDERPLATING OVERALL.

3. PART NUMBER DESCRIPTION

DISC XX L S G E T  
 [包装方式: T=管装 R=盒装]  
 [电镀层: B=镀锡3u" G=镀镍3u" / 焊锡3u"-2u"]  
 [G=鍍金 S=內金外鍍]  
 [厚度: S牌 / J牌 / 環 / A牌 / Z牌]  
 [T=低推厚度 S=低推不厚度 L=長推]  
 [产品规格: 02=2P 04=4P 06=6P 08=8P 10=10P 12=12P]

Number	Part Name	Material	Finished
①	Actuator	UL94 V0	White
②	Cover	UL94 V0	Black
③	Movable	Copper Alloy	3u"Gold
④	Terminal	Brass	1u"Gold
⑤	Base	UL94 V0	Black
⑥	Terminal Contact	Brass	3u"Gold

TOLERANCE UNLESS OTHERWISE SPECIFIED		INSPECTION COPY	
LINER	ANGLES	PROJECTION	COPY
0 ± 0.25	0. ± 2'		
.00 ± 0.15	.0 ± 1'		
.000 ± 0.10	.00 ± 0.5'	DESIGN	2012/04/12
DRAWING		CHECK	
APPRO.			

**RE** 东莞市广誉实业有限公司  
 Dongguan Kingtek Industrial Co., Ltd.

FILE NO. DISCO31SGE1-A  
 SIZE UNIT SCALE SHEET REV.  
 A4 mm 2 : 1 1 OF 1 A

单击下面可查看定价，库存，交付和生命周期等信息

[>>KINGTEK\(广督\)](#)