



BCR12PM Series  
12A TRIACs  
High temperature  
junction TRIACs




ShenZhenHanKingyuan  
Electronic CO.,Ltd

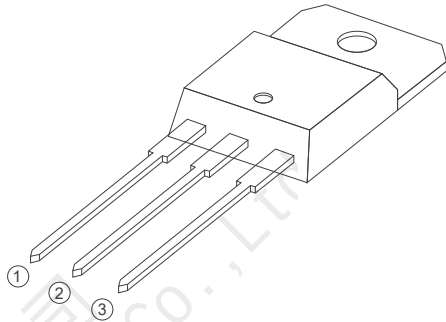


TO-220A Insulated

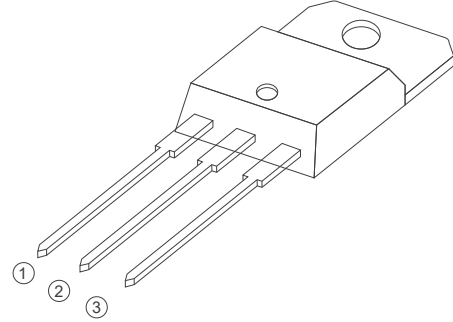


TO-220B Non-Insulated

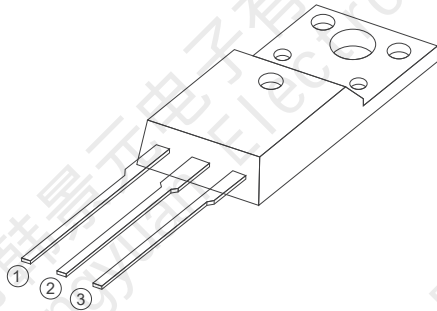

TO-220F Insulated



TO-263

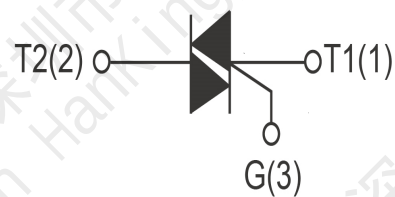

## FEATURES

> IT(RMS):12A > VGT: 1.5V > VDRM VRRM:600Vand800V

## APPLICATIONS

Washing machine,vacuums, massager,solid state relay, AC Motor speed regulation and so on.

## Absolute Maximum Ratings (T<sub>J</sub>=25°C unless otherwise specified)

| Symbol          | Parameter                         | Conditions            | Ratings | Unit             |
|-----------------|-----------------------------------|-----------------------|---------|------------------|
| VDRM<br>VRRM    | Repetitive Peak Off-State Voltage | 12                    | 600     | V                |
|                 |                                   | 14                    | 800     | V                |
| IT(RMS)         | R.M.S On-State Current            | T <sub>c</sub> =85°C  | 12      | A                |
| ITSM            | Surge On-State Current            | tp=16.7ms / Tp=10ms   | 120/128 | A                |
| I <sub>ft</sub> | I <sub>ft</sub> for fusing        | Tp=10ms               | 72      | A <sup>2</sup> s |
| PG(AV)          | Average Gate Power Dissipation    | T <sub>J</sub> =150°C | 0.5     | W                |
| IGM             | Peak Gate Current                 | T <sub>J</sub> =150°C | 2       | A                |
| T <sub>J</sub>  | Operating Junction Temperature    |                       | ~40~150 | °C               |
| TSTG            | Storage Temperature               |                       | ~40~150 | °C               |

## Electrical Characteristics (T<sub>J</sub>=25°C unless otherwise specified)

| Symbol               | Parameter                                          | Test Conditions                                                | Value |      |       | Unit |
|----------------------|----------------------------------------------------|----------------------------------------------------------------|-------|------|-------|------|
|                      |                                                    |                                                                | C1    | C2   | C3    |      |
| IDRM                 | Repetitive Peak Off-State Current                  | T <sub>J</sub> =150°C                                          | 2.0   |      |       | mA   |
| IRRM                 | Repetitive Peak Reverse Current                    | T <sub>J</sub> =150°C                                          | 3     |      |       | mA   |
| VTM                  | Forward "on" voltage                               | IT=20A tp=380us                                                | ≤1.5  |      |       | V    |
| VGT                  | Gate trigger voltage                               | VD=12V ,RL=30Ω                                                 | ≤1.5  |      |       | V    |
| di/dt                | Critical rate of rise of on-state current          | I,II,III<br>F=120Hz,T <sub>J</sub> =125°C<br>IG=2xIGT,tr≤100ns | ≥50   |      |       | A/us |
| IGT                  | Gate trigger current                               | I,II,III<br>VD=12V RL=30Ω                                      | ≤10   | ≤20  | ≤30   | mA   |
| IH                   | Holding current                                    | IT=0.2A                                                        | ≤30   | ≤45  | ≤60   | mA   |
| VDG                  | Gate non-trigger voltage                           | ALL<br>VD=VDRM TJ=125°C                                        | ≥0.2  |      |       | V    |
| (dv/dt) <sub>c</sub> | Critical-rate of rise of commutation voltage       | TJ=150°C VD=400V<br>(di/dt) <sub>c</sub> =-5.0A/mS             | 5     | 15   | 20    | V/us |
| dv/dt                | Critical-rate of rise of rise of off-state voltage | VD=67% VDRM,gate open,T <sub>J</sub> =150°C                    | ≥200  | ≥500 | ≥1000 | V/us |
| Rth(j-c)             | Thermal resistance                                 | Junction to case                                               | 2.5   |      |       | °C/W |

FIG1

Maximum power dissipation versus RMS on-state current

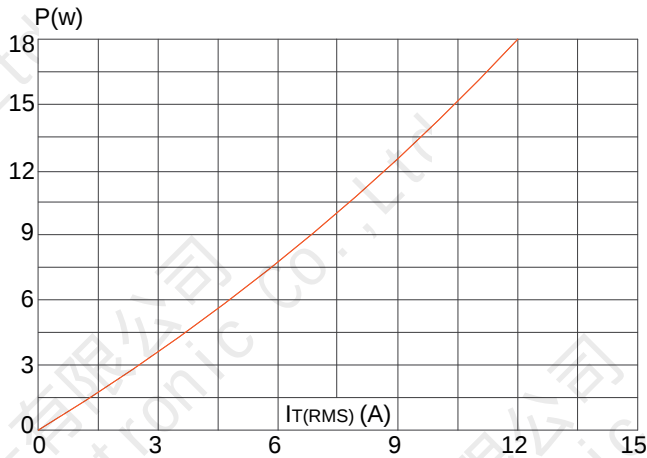


FIG2

RMS on-state current versus case temperature

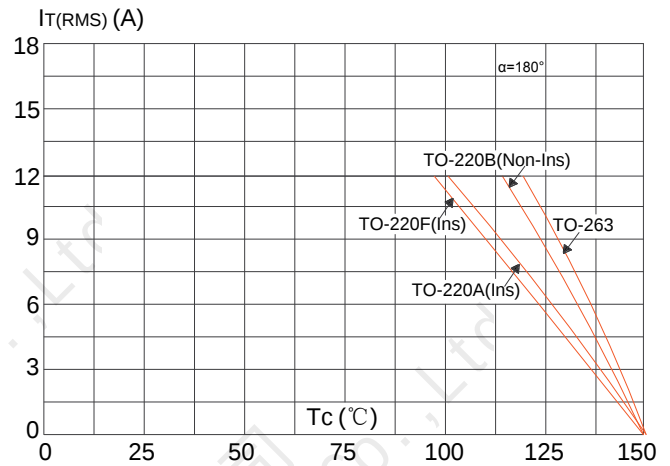


FIG3

Surge peak on-state current versus number of cycles

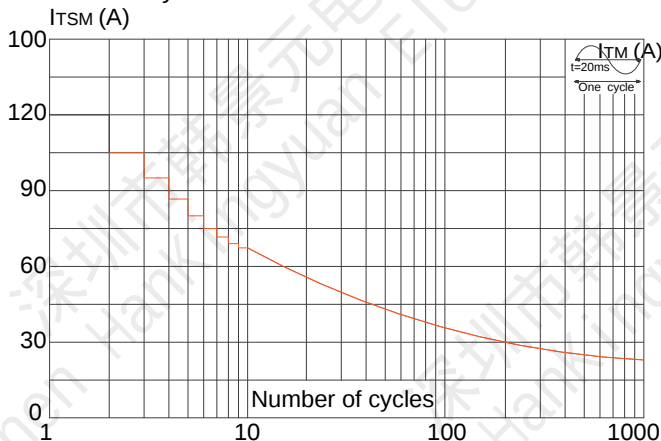


FIG4

On-state characteristics (maximum values)

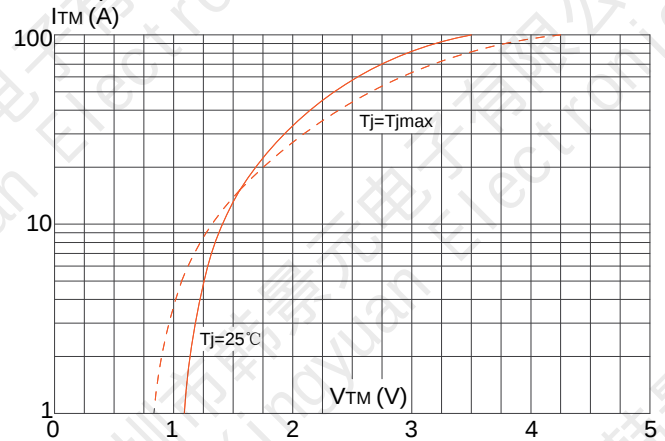


FIG5

Non-repetitive surge peak on-state current for a sinusoidal pulse with width  $t_p < 20ms$ , and corresponding value of  $I^2t$  ( $dI/dt < 100A/\mu s$ )



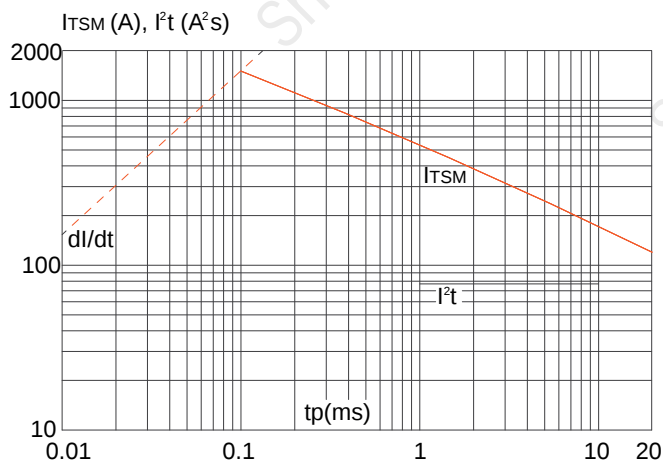


FIG6

FIG.6: Relative variations of gate trigger current, holding current and latching current versus junction temperature

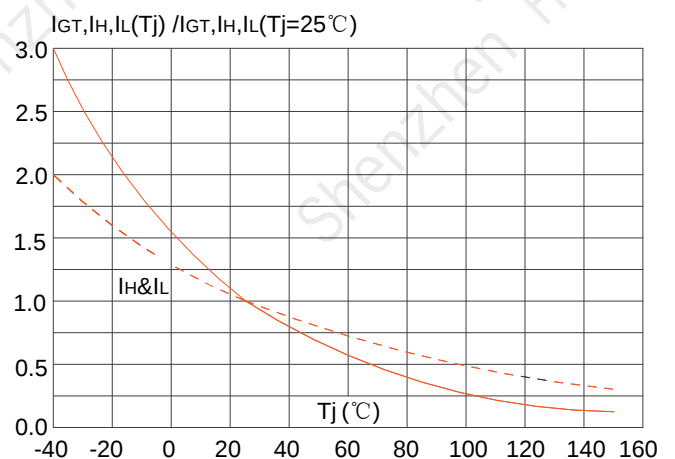


## PACKAGE MECHANICAL DATA

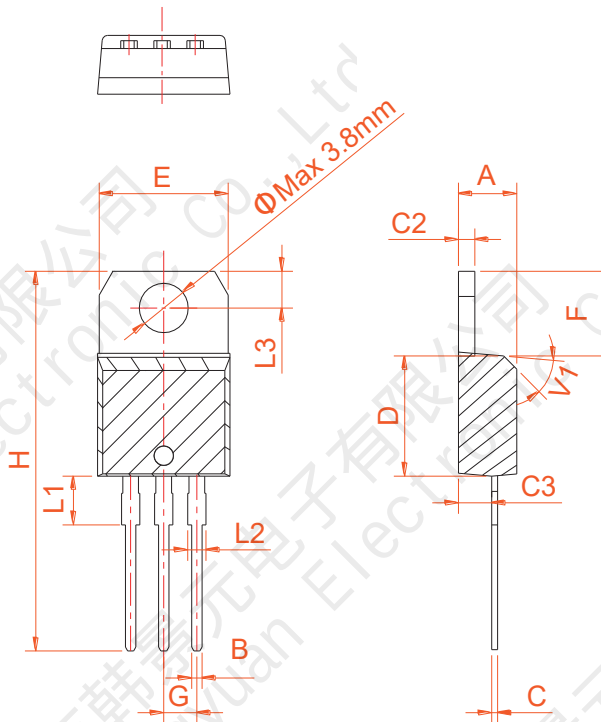

TO-220A Ins


| Ref. | Dimensions  |      |      |        |       |       |
|------|-------------|------|------|--------|-------|-------|
|      | Millimeters |      |      | Inches |       |       |
|      | Min.        | Typ. | Max. | Min.   | Typ.  | Max.  |
| A    | 4.40        |      | 4.60 | 0.173  |       | 0.181 |
| B    | 0.61        |      | 0.88 | 0.024  |       | 0.035 |
| C    | 0.46        |      | 0.70 | 0.018  |       | 0.028 |
| C2   | 1.21        |      | 1.32 | 0.048  |       | 0.052 |
| C3   | 2.40        |      | 2.72 | 0.094  |       | 0.107 |
| D    | 8.60        |      | 9.70 | 0.339  |       | 0.382 |
| E    | 9.80        |      | 10.4 | 0.386  |       | 0.409 |
| F    | 6.55        |      | 6.95 | 0.258  |       | 0.274 |
| G    |             | 2.54 |      |        | 0.1   |       |
| H    | 28.0        |      | 29.8 | 1.102  |       | 1.173 |
| L1   |             | 3.75 |      |        | 0.148 |       |
| L2   | 1.14        |      | 1.70 | 0.045  |       | 0.067 |
| L3   | 2.65        |      | 2.95 | 0.104  |       | 0.116 |
| V1   |             | 45°  |      |        | 45°   |       |

| Ref. | Dimensions  |      |      |        |       |       |
|------|-------------|------|------|--------|-------|-------|
|      | Millimeters |      |      | Inches |       |       |
|      | Min.        | Typ. | Max. | Min.   | Typ.  | Max.  |
| A    | 4.40        |      | 4.60 | 0.173  |       | 0.181 |
| B    | 0.61        |      | 0.88 | 0.024  |       | 0.035 |
| C    | 0.46        |      | 0.70 | 0.018  |       | 0.028 |
| C2   | 1.21        |      | 1.32 | 0.048  |       | 0.052 |
| C3   | 2.40        |      | 2.72 | 0.094  |       | 0.107 |
| D    | 8.60        |      | 9.70 | 0.339  |       | 0.382 |
| E    | 9.60        |      | 10.4 | 0.378  |       | 0.409 |
| F    | 6.20        |      | 6.60 | 0.244  |       | 0.260 |
| G    |             | 2.54 |      |        | 0.1   |       |
| H    | 28.0        |      | 29.8 | 1.102  |       | 1.173 |
| L1   |             | 3.75 |      |        | 0.148 |       |
| L2   | 1.14        |      | 1.70 | 0.045  |       | 0.067 |
| L3   | 2.65        |      | 2.95 | 0.104  |       | 0.116 |
| V1   |             | 45°  |      |        | 45°   |       |

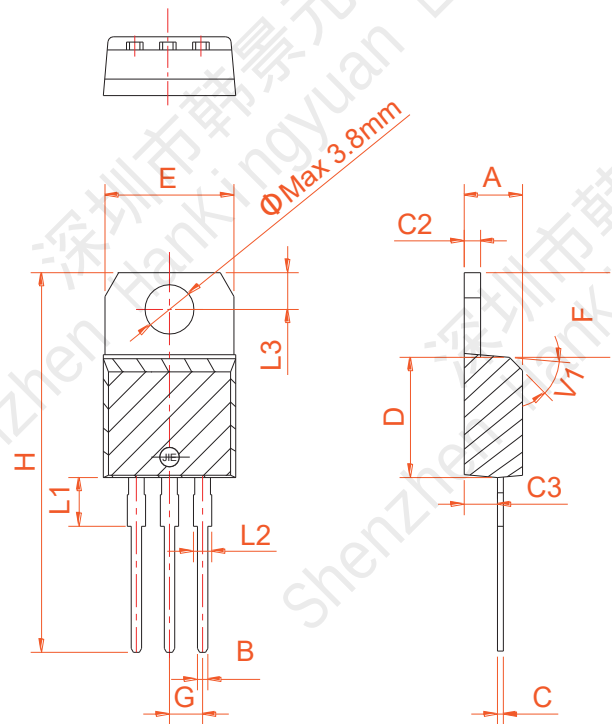

TO-220B Non-Ins


## PACKAGE MECHANICAL DATA

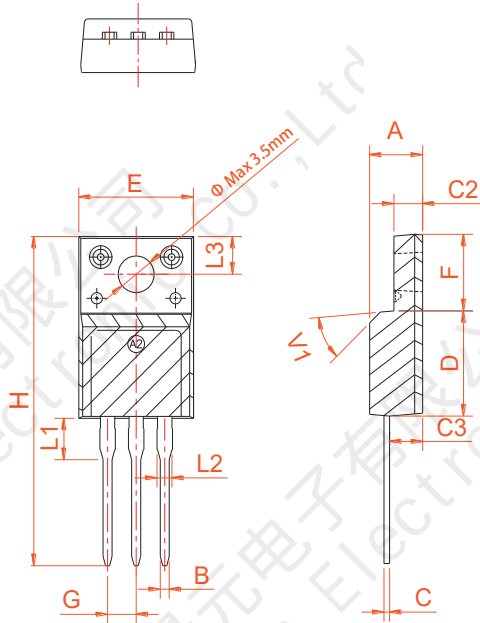

TO-220F Ins

| Ref. | Dimensions  |      |      |        |       |       |
|------|-------------|------|------|--------|-------|-------|
|      | Millimeters |      |      | Inches |       |       |
|      | Min.        | Typ. | Max. | Min.   | Typ.  | Max.  |
| A    | 4.50        |      | 4.90 | 0.177  |       | 0.193 |
| B    | 0.74        | 0.80 | 0.83 | 0.029  | 0.031 | 0.033 |
| C    | 0.47        |      | 0.65 | 0.019  |       | 0.026 |
| C2   | 2.45        |      | 2.75 | 0.096  |       | 0.108 |
| C3   | 2.60        |      | 3.00 | 0.102  |       | 0.118 |
| D    | 8.80        |      | 9.30 | 0.346  |       | 0.366 |
| E    | 9.80        |      | 10.4 | 0.386  |       | 0.410 |
| F    | 6.40        |      | 6.80 | 0.252  |       | 0.268 |
| G    |             | 2.54 |      |        | 0.1   |       |
| H    | 28.0        |      | 29.8 | 1.102  |       | 1.173 |
| L1   |             | 3.63 |      |        | 0.143 |       |
| L2   | 1.14        |      | 1.70 | 0.045  |       | 0.067 |
| L3   |             | 3.30 |      |        | 0.130 |       |
| V1   |             | 45°  |      |        | 45°   |       |

| Ref. | Dimensions  |      |       |        |       |       |
|------|-------------|------|-------|--------|-------|-------|
|      | Millimeters |      |       | Inches |       |       |
|      | Min.        | Typ. | Max.  | Min.   | Typ.  | Max.  |
| A    | 9.90        |      | 10.20 | 0.390  |       | 0.402 |
| B    | 14.70       |      | 15.80 | 0.579  |       | 0.622 |
| C    | 9.4         |      | 9.6   | 0.37   |       | 0.378 |
| D    |             | 2.54 |       |        | 0.100 |       |
| E    | 1.20        |      | 1.40  | 0.047  |       | 0.055 |
| F    | 0.75        |      | 0.85  | 0.029  |       | 0.033 |
| G    |             |      | 1.75  |        |       | 0.069 |
| H    | 4.40        |      | 4.70  | 0.173  |       | 0.185 |
| J    | 2.30        |      | 2.70  | 0.091  |       | 0.106 |
| K    | 0.38        |      | 0.55  | 0.015  |       | 0.022 |
| L    | 0           | 0.10 | 0.25  | 0      | 0.004 | 0.010 |
| M    | 1.25        |      | 1.35  | 0.049  |       | 0.053 |

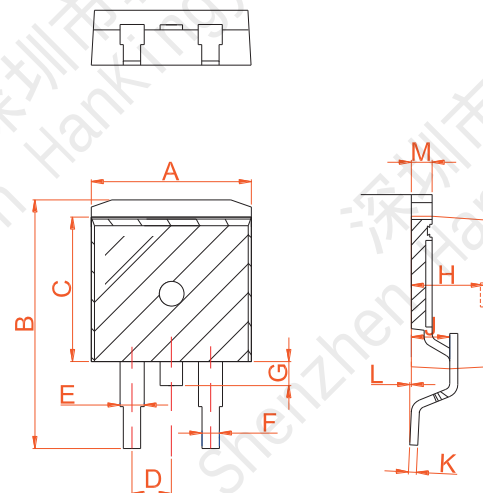

TO-263



ShenZhenHanKingyuan  
Electronic CO.,Ltd

Information furnished is believed to be accurate and reliable. However, Shenzhen HanKingyuan Electronic assumes no responsibility for the consequences of use of such information nor for any infringement of patents or other rights of third parties which may result from its use. Specifications mentioned in this publication are subject to change without notice. This publication supersedes and replaces all information previously supplied.

The KY logo is a registered trademark of Shenzhen HanKingyuan Electronic.

©2013 Shenzhen HanKingyuan Electronic – Printed in Shenzhen – All Rights Reserved

单击下面可查看定价，库存，交付和生命周期等信息

[>>KY\(韩景元\)](#)