


MI1210K600R-10

PHYSICAL DIMENSIONS:


A	3.20 [.126]	+ 0.20 [.008]
B	2.50 [.098]	+ 0.20 [.008]
C	1.40 [.055]	+ 0.20 [.008]
D	0.46 [.018]	+ 0.20 [.008]

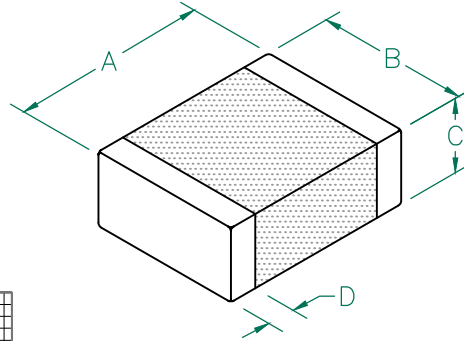


ELECTRICAL CHARACTERISTICS:

Z @ 100MHz (Ω)	DCR (Ω)	Rated Current
Nominal	60	
Minimum	45	
Maximum	75	0.035
		1500 mA

Z vs FREQUENCY
IMPEDANCE UNDER DC BIAS

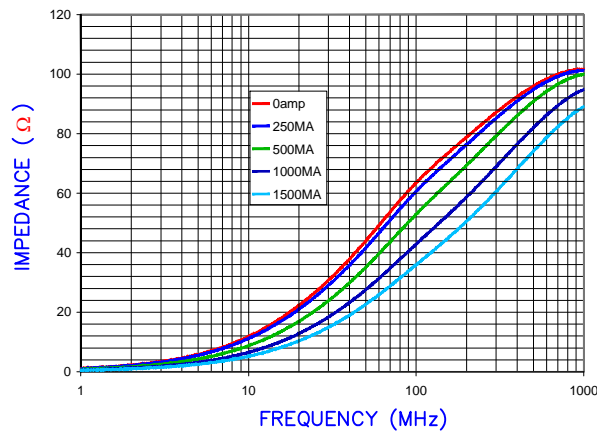


|Z|, R, AND X vs. FREQUENCY

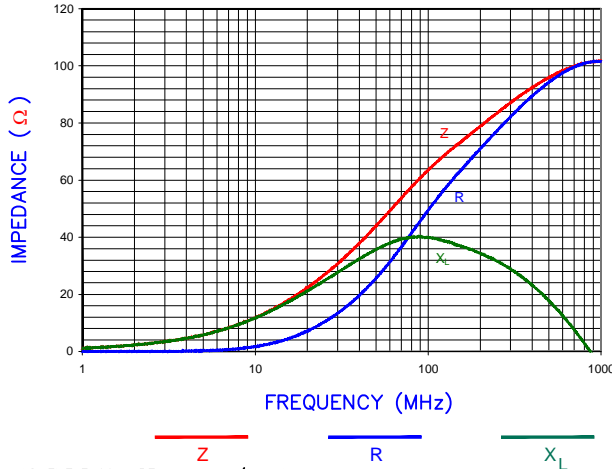


AGILENT E4991A RF Impedance/Material Analyzer
HP 16194A Test Fixture. TEST REF. 3124

LAND PATTERNS FOR REFLOW SOLDERING

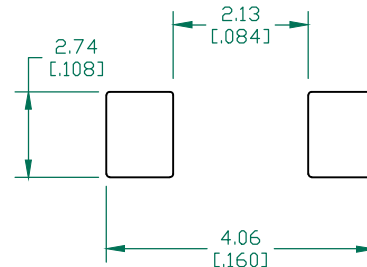

(For wave soldering, add 0.762
(0.030) to this dimension)

RECOMMENDED SOLDERING CONDITIONS

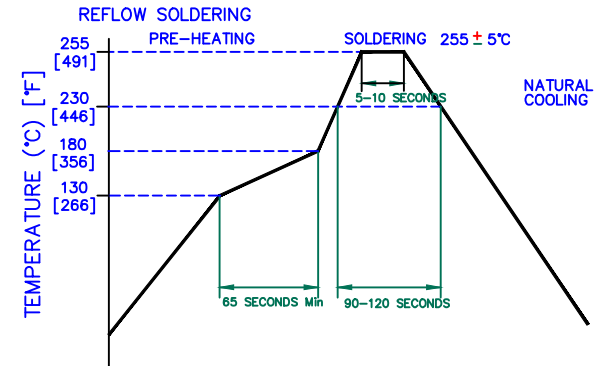

DIMENSIONS ARE IN mm [INCHES]				This print is the property of Laird Tech. and is loaned in confidence subject to return upon request and with the understanding that no copies shall be made without the written consent of Laird Tech. All rights to design or invention are reserved.		Laird		
D	ADD OPERATING TEMPERATURE UPDATE LAIRD LOGO AND REFLOW CURVE	08/05/13	QU	PROJECT/PART NUMBER: MI1210K600R-10		REV D	PART TYPE: CO-FIRE	DRAWN BY: JRK
C	UPDATE COMPANY LOGO	08/26/08	JRK	DATE: 04/13/04		SCALE: NTS	SHEET: 1 of 1	
B	ADD ROHS SYMBOL; UPDATE TAPE NOTE; UPDATE COMPANY LOGO	08/31/07	JRK	CAD #		TOOL #		
A	ORIGINAL DRAFT	04/13/04	JRK	M11210K600R-10-D				
REV	DESCRIPTION	DATE	INT					

单击下面可查看定价，库存，交付和生命周期等信息

[>>Laird\(莱尔德\)](#)