


Current Transducer LT 1005-S/SP19

$$I_{PN} = 1000 \text{ A}$$

For the electronic measurement of currents : DC, AC, pulsed..., with a galvanic isolation between the primary circuit (high power) and the secondary circuit (electronic circuit).



16109



Electrical data

I_{PN}	Primary nominal r.m.s. current	1000	A		
I_P	Primary current, measuring range	0 .. ± 2400	A		
R_M	Measuring resistance @	$T_A = 70^\circ\text{C}$		$T_A = 85^\circ\text{C}$	
		R_{Mmin}	R_{Mmax}	R_{Mmin}	R_{Mmax}
	with $\pm 15 \text{ V}$	@ $\pm 1300 \text{ A}_{max}$	0 10	@ $\pm 1250 \text{ A}^1$	0 10 Ω
		@ $\pm 1400 \text{ A}_{max}$	0 7		0 5 Ω
		@ $\pm 1500 \text{ A}_{max}$	0 4	@ $\pm 1450 \text{ A}^1$	0 3 Ω
	with $\pm 24 \text{ V}$	@ $\pm 2200 \text{ A}_{max}$	0 10	@ $\pm 2100 \text{ A}^1$	3 10 Ω
		@ $\pm 2300 \text{ A}_{max}$	0 7		3 5 Ω
		@ $\pm 2400 \text{ A}_{max}$	0 5		3 3 Ω
I_{SN}	Secondary nominal r.m.s. current	200	mA		
K_N	Conversion ratio	1 : 5000			
V_C	Supply voltage ($\pm 5\%$)	$\pm 15 \dots 24$	V		
I_C	Current consumption	$30 (@ \pm 24 \text{ V}) + I_S$	mA		
V_d	R.m.s. voltage for AC isolation test, 50 Hz, 1 mn		12 ²⁾	kV	
			1.5 ³⁾	kV	
V_e	R.m.s. voltage for partial discharge extinction @ 10 pC	4.1	kV		

Features

- Closed loop (compensated) current transducer using the Hall effect
- Insulated plastic case recognized according to UL 94-V0.

Special features

- $I_P = 0 \dots \pm 2400 \text{ A}$
- $V_C = \pm 15 \dots 24 \text{ V} (\pm 5\%)$
- $V_d = 12 \text{ kV}$
- $T_A = -40^\circ\text{C} (-50^\circ\text{C}) \dots +85^\circ\text{C}$
- Secondary connection on screened cable $3 \times 0.5 \text{ mm}^2$
- Shield between primary and secondary connected to the cable screening
- Railway equipment
- Customer marking.

Advantages

- Excellent accuracy
- Very good linearity
- Low temperature drift
- Optimized response time
- Wide frequency bandwidth
- No insertion losses
- High immunity to external interference
- Current overload capability.

Applications

- AC variable speed drives and servo motor drives
- Static converters for DC motor drives
- Battery supplied applications
- Uninterruptible Power Supplies (UPS)
- Switched Mode Power Supplies (SMPS)
- Power supplies for welding applications.

Accuracy - Dynamic performance data


X_G	Overall accuracy @ $I_{PN}, T_A = 25^\circ\text{C}$	± 0.5	%
e_L	Linearity error	< 0.1	%
I_O	Offset current @ $I_P = 0, T_A = 25^\circ\text{C}$	Typ	Max
			± 0.4 mA
I_{OT}	Thermal drift of I_O	- $25^\circ\text{C} \dots +70^\circ\text{C}$	± 0.2 mA
		- $50^\circ\text{C} \dots +85^\circ\text{C}$	± 0.8 mA
t_r	Response time ⁴⁾ @ 90 % of I_{PN}	< 1	μs
di/dt	di/dt accurately followed	> 50	A/ μs
f	Frequency bandwidth (-1 dB)	DC .. 150	kHz

General data

T_A	Ambient operating temperature	-40 (-50) .. +85	$^\circ\text{C}$
T_S	Ambient storage temperature	-50 .. +85	$^\circ\text{C}$
R_S	Secondary coil resistance @	$T_A = 70^\circ\text{C}$	40 Ω
		$T_A = 85^\circ\text{C}$	42 Ω
m	Mass	700	g
	Standards	EN 50155 : 1955	

- Notes :** 1) I_{Pmax} @ $+85^\circ\text{C}$ & customer measuring resistance
 2) Between primary and secondary + internal shield + screened cable
 3) Between secondary and internal shield + screened cable
 4) With a di/dt of 100 A/ μs .

Dimensions LT 1005-S/SP19 (in mm. 1 mm = 0.0394 inch)

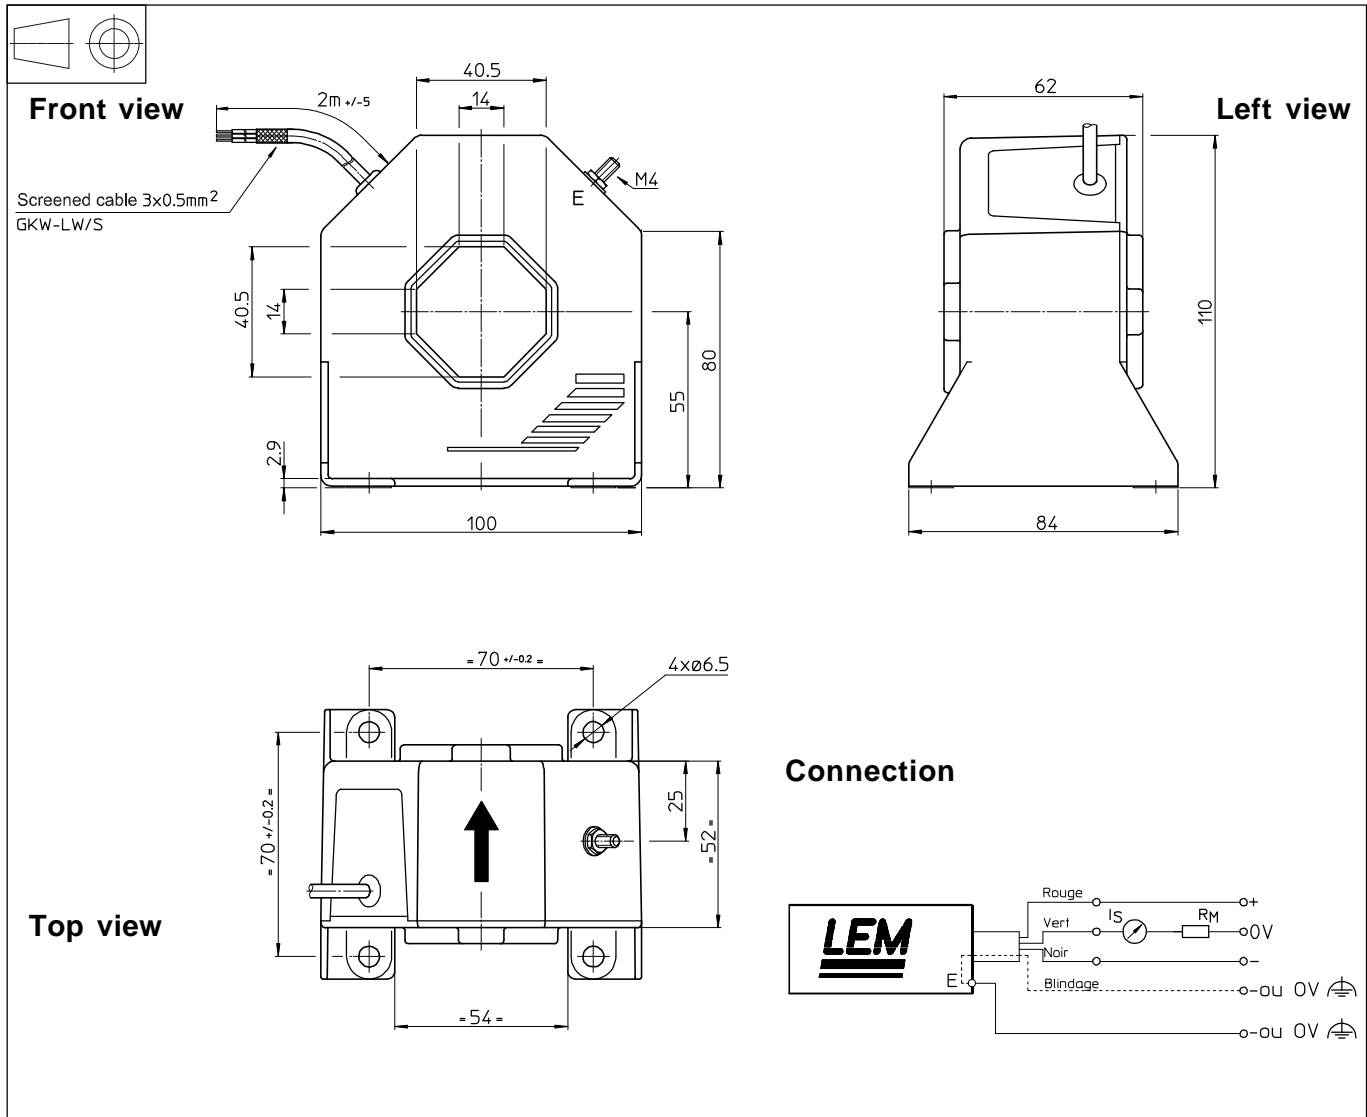

Mechanical characteristics

- General tolerance ± 0.5 mm
- Transducer fastening
4 holes $\varnothing 6.5$ mm
4 x M6 steel screws
Recommended fastening torque 5 Nm or 3.69 Lb. - Ft
- Primary through-hole 40.5 x 40.5 mm
- Connection of secondary screened cable 3 x 0.5 mm²
- Connection to terminal E M4 threaded stud
Recommended fastening torque 1.2 Nm or 0.88 Lb. - Ft.

Remarks

- I_s is positive when I_p flows in the direction of the arrow.
- Temperature of the primary conductor should not exceed 100°C.
- Dynamic performances (di/dt and response time) are best with a single bar completely filling the primary hole.

单击下面可查看定价，库存，交付和生命周期等信息

[>>LEM\(莱姆\)](#)