


For the electronic measurement of current: DC, AC, pulsed..., with galvanic separation between the primary and the secondary circuit.

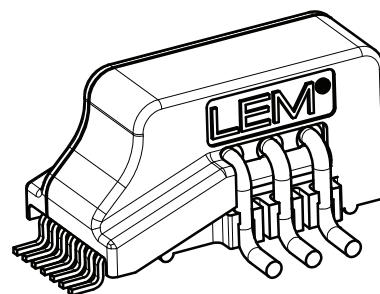

## Features

- Hall effect measuring principle
- Multirange current transducer through PCB pattern lay-out
- Galvanic separation between primary and secondary circuit
- Insulated test voltage 4300 V
- Low power consumption
- Extremely low profile 12 mm
- Fixed offset & sensitivity
- Overcurrent detection  $2.63 \times I_{PN}$  (peak value)
- Memory check.

## Special feature

- Single power supply 3.3 V.

## Advantages

- Small size and space saving
- Only one design for wide primary current range
- High immunity to external interference
- 8 mm creepage/clearance
- Fast response.

## Applications

- AC variable speed drives
- Static converters for DC motor drives
- Battery supplied applications
- Uninterruptible Power Supplies (UPS)
- Switched Mode Power Supplies (SMPS)
- Power supplies for welding applications
- The solar inverter on DC side of the inverter (MPPT)
- Combiner box.

## Standards

- EN 50178: 1997
- IEC 61010-1: 2010
- IEC 61326-1: 2012
- UL 508: 2018.

## Application Domain

- Industrial.

## Safety



Caution

If the device is used in a way that is not specified by the manufacturer, the protection provided by the device may be compromised. Always inspect the electronics unit and connecting cable before using this product and do not use it if damaged. Mounting assembly shall guarantee the maximum primary conductor temperature, fulfill clearance and creepage distance, minimize electric and magnetic coupling, and unless otherwise specified can be mounted in any orientation.



Caution, risk of electrical shock

This transducer must be used in limited-energy secondary circuits SELV according to IEC 61010-1, in electric/electronic equipment with respect to applicable standards and safety requirements in accordance with the manufacturer's operating specifications.

Use caution during installation and use of this product; certain parts of the module can carry hazardous voltages and high currents (e.g. power supply, primary conductor).

Ignoring this warning can lead to injury and or/or cause serious damage.

De-energize all circuits and hazardous live parts before installing the product.

All installations, maintenance, servicing operations and use must be carried out by trained and qualified personnel practicing applicable safety precautions.

This transducer is a build-in device, whose hazardous live parts must be inaccessible after installation.

This transducer must be mounted in a suitable end-enclosure.

Besides make sure to have a distance of minimum 30 mm between the primary terminals of the transducer and other neighboring components.

Main supply must be able to be disconnected.

Never connect or disconnect the external power supply while the primary circuit is connected to live parts.

Always wear protective clothing and gloves if hazardous live parts are present in the installation where the measurement is carried out.

This transducer is a built-in device, not intended to be cleaned with any product. Nevertheless if the user must implement cleaning or washing process, validation of the cleaning program has to be done by himself.



ESD susceptibility

The product is susceptible to be damaged from an ESD event and the personnel should be grounded when handling it.

Do not dispose of this product as unsorted municipal waste. Contact a qualified recycler for disposal.



Underwriters Laboratory Inc. recognized component

## Absolute maximum ratings

| Parameter  | Symbol                | Unit | Value |
|--|-----------------------|------|-------|
| Maximum supply voltage                                   | $U_{C \max}$          | V    | 6.5   |
| Maximum primary conductor temperature                    | $T_{B \max}$          | °C   | 120   |
| Electrostatic discharge voltage (HBM - Human Body Model) | $U_{ESD \text{ HBN}}$ | kV   | 2     |

Stresses above these ratings may cause permanent damage. Exposure to absolute maximum ratings for extended periods may degrade reliability.

## UL 508: Ratings and assumptions of certification

File # E189713 Volume: 2 Section: 5

### Standards

- CSA C22.2 NO. 14-10 INDUSTRIAL CONTROL EQUIPMENT - Edition 11
- UL 508 STANDARD FOR INDUSTRIAL CONTROL EQUIPMENT - Edition 18

### Ratings

| Parameter                                | Unit    | Value                                |
|--|---------|--------------------------------------|
| Primary potential involved <sup>1)</sup> | V AC/DC | 1000                                 |
| Maximum surrounding air temperature      | °C      | 105                                  |
| Primary current                          | A       | According to series primary currents |
| Transducer supply voltage                | V DC    | 0 ... 3.3                            |
| Output voltage                           | V       | 0 ... 3.3                            |

**Note:** <sup>1)</sup> Primary potential involved is 600 V AC/DC according to Canadian Standard CSA C22.2.

### Conditions of acceptability

When installed in the end-use equipment, consideration shall be given to the following:

- 1 - These devices have been evaluated for overvoltage category III and for use in pollution degree 2 environment.
- 2 - A suitable enclosure shall be provided in the end-use application.
- 3 - The terminals have not been evaluated for field wiring.
- 4 - These devices have been evaluated for use in 105 °C maximum surrounding air temperature.
- 5 - The secondary (Sensing) circuit is intended to be supplied by an Isolated Secondary Circuit - Limited voltage circuit defined by UL 508 paragraph 32.5. The maximum open circuit voltage potential available to the circuit and overcurrent protection shall be evaluated in the end use application.
- 6 - These devices are intended to be mounted on a printed wiring board of end-use equipment. The suitability of the connections (including spacings) shall be determined in the end-use application.
- 7 - Primary terminals shall not be straightened since assembly of housing case depends upon bending of the terminals.
- 8 - Any surface of polymeric housing have not been evaluated as insulating barrier.
- 9 - Low voltage circuits are intended to be powered by a circuit derived from an isolating source (such as a transformer, optical isolator, limiting impedance or electro-mechanical relay) and having no direct connection back to the primary circuit (other than through the grounding means).

### Marking

Only those products bearing the UL or UR Mark should be considered to be Listed or Recognized and covered under UL's Follow-Up Service. Always look for the Mark on the product.

**Insulation coordination**

| Parameter  | Symbol   | Unit | Value | Comment  |
|--|----------|------|-------|--|
| RMS voltage for AC insulation test, 50/60 Hz, 1 min        | $U_d$    | kV   | 4.3   |  |
| Impulse withstand voltage 1.2/50 $\mu$ s                   | $U_{Ni}$ | kV   | 8     |  |
| Partial discharge extinction test voltage ( $q_m < 10$ pC) | $U_t$    | V    | 1650  |  |
| Clearance (pri. - sec.)                                    | $d_{Cl}$ | mm   | 8     | Shortest distance through air  |
| Creepage distance (pri. - sec.)                            | $d_{Cp}$ | mm   | 8     | Shortest path along device body  |
| Case material  | -        | -    | V0    | According to UL 94   |
| Comparative tracking index                                 | $CTI$    |      | 600   |  |
| Application example  |          | V    | 600   | Reinforced insulation, CAT III, PD 2 non uniform field according to EN 50178       |
| Application example  |          | V    | 300   | Reinforced insulation, CAT III, PD 2 non uniform field according to IEC 61010      |
| Application example  |          | V    | 1000  | Basic insulation, CAT III, PD 2 non uniform field according to EN 50178, IEC 61010 |

**Environmental and mechanical characteristics**

| Parameter                                   | Symbol      | Unit         | Min | Typ | Max | Comment |
|---|-------------|--------------|-----|-----|-----|---------|
| Ambient operating temperature               | $T_A$       | $^{\circ}$ C | -40 |     | 105 |         |
| Ambient storage temperature                 | $T_{A\ st}$ | $^{\circ}$ C | -40 |     | 105 |         |
| Surrounding temperature according to UL 508 |             | $^{\circ}$ C |     |     | 105 |         |
| Mass  | $m$         | g            |     | 5   |     |         |

At  $T_A = 25\text{ °C}$ ,  $U_C = +3.3\text{ V}$ ,  $N_P = 1\text{ turn}$ ,  $R_L = 10\text{ K}\Omega$  unless otherwise noted (see Min, Max, typ. definition paragraph in [page 8](#)).

| Parameter  | Symbol                | Unit                    | Min                 | Typ                 | Max                 | Comment                                 |
|--|-----------------------|-------------------------|---------------------|---------------------|---------------------|---|
| Primary nominal RMS current  | $I_{PN}$              | At                      |                     | 8                   |                     |   |
| Primary current, measuring range   | $I_{PM}$              | At                      | -20                 |                     | 20                  |   |
| Number of primary turns  | $N_P$                 |                         |                     | 1,2,3               |                     |   |
| Supply voltage   | $U_C$                 | V                       | 3.14                | 3.3                 | 3.46                |   |
| Current consumption  | $I_C$                 | mA                      |                     |                     | 25                  |   |
| Reference voltage  | $U_{ref}$             | V                       | 1.636               | 1.65                | 1.664               | Internal reference                      |
| External reference voltage   | $U_{ref}$             | V                       | 0.5                 |                     | 1.85                | @ $U_C = 3.3 \approx 3.46\text{ V}$     |
|  |                       |                         | 0.5                 |                     | 1.7                 | @ $U_C = 3.14 \approx 3.3\text{ V}$     |
| Output voltage range @ $I_{PM}$  | $U_{out} - U_{ref}$   | V                       | -1.15               |                     | 1.15                |   |
| Output voltage @ $I_P = 0\text{ A}$  | $U_{out}$             | V                       |                     | $U_{ref} + U_{OE}$  |                     |   |
| Electrical offset voltage  | $U_{OE}$              | mV                      | -7                  |                     | 7                   |   |
| Temperature coefficient of $U_{ref}$                                       | $TCU_{ref}$           | ppm/K                   |                     |                     | $\pm 170$           | -20 °C ... 85 °C<br>Internal reference  |
|  |                       |                         |                     |                     | $\pm 180$           | -40 °C ... 105 °C<br>Internal reference |
| Temperature coefficient of $U_{OE}$  | $TCU_{OE}$            | mV/K                    |                     |                     | $\pm 0.080$         | -40 °C ... 105 °C                       |
| Nominal sensitivity  | $S_N$                 | mV/A                    |                     | 57.5                |                     | 460 mV/ $I_{PN}$ @ $U_C = 3.3\text{ V}$ |
| Sensitivity error  | $\varepsilon_S$       | %                       |                     |                     | $\pm 0.5$           | Factory adjustment                      |
| Temperature coefficient of $S$   | $TCS$                 | ppm/K                   |                     |                     | $\pm 200$           | -20 °C ... 85 °C                        |
|  |                       |                         |                     |                     | $\pm 210$           | -40 °C ... 105 °C                       |
| Linearity error 0 ... $I_{PN}$   | $\varepsilon_L$       | % of $I_{PN}$           |                     |                     | $\pm 0.5$           | @ $U_C = 3.3\text{ V}$                  |
| Linearity error 0 ... $I_{PM}$   | $\varepsilon_L$       | % of $I_{PM}$           |                     |                     | $\pm 0.8$           | @ $U_C = 3.3\text{ V}$                  |
| Sensitivity error with respect to $U_C \pm 10\%$                           | $\varepsilon_S$       | %/%                     |                     |                     | $\pm 0.05$          | Sensitivity error per $U_C$ drift       |
| Magnetic offset voltage @ $I_P = 0$ after $2.5 \times I_{PN}$              | $U_{OM}$              | mV                      |                     |                     | $\pm 4$             |   |
| Delay time @ 10 % of the final output value $I_{PN}$ step                  | $t_{D10}$             | $\mu\text{s}$           |                     |                     | 2                   | $di/dt = I_{PN}/\mu\text{s}$            |
| Delay time @ 90 % of the final output value $I_{PN}$ step                  | $t_{D90}$             | $\mu\text{s}$           |                     |                     | 3.5                 | $di/dt = I_{PN}/\mu\text{s}$            |
| Frequency bandwidth (-3 dB)  | $BW$                  | kHz                     |                     | 250                 |                     |   |
| Noise voltage spectral density (DC ... 100 kHz)                            | $u_{no}$              | $\mu\text{V}/\text{Hz}$ |                     |                     | 18.9                |   |
| RMS noise voltage (DC ... 20 MHz)  | $U_{no}$              | mVpp                    |                     | 40                  |                     |   |
| Standby pin "0" level  |                       | V                       |                     |                     | 0.3                 |   |
| Standby pin "1" level  |                       | V                       | $U_C - 0.3$         |                     |                     |   |
| Time to switch from standby to normal mode                                 |                       | $\mu\text{s}$           |                     |                     | 20                  |   |
| Overcurrent detection  |                       | At                      | $2.6 \times I_{PN}$ | $2.9 \times I_{PN}$ | $3.2 \times I_{PN}$ | peak value                              |
| Sum of sensitivity and linearity error @ $I_{PN}$                          | $\varepsilon_{SL}$    | % of $I_{PN}$           |                     |                     | $\pm 1$             | $= \varepsilon_S + \varepsilon_L$       |
| Sum of sensitivity and linearity error @ $I_{PN}$ @ $T_A = +85\text{ °C}$  | $\varepsilon_{SL85}$  | % of $I_{PN}$           |                     |                     | $\pm 3.3$           | See formula note <sup>1)</sup>          |
| Sum of sensitivity and linearity error @ $I_{PN}$ @ $T_A = +105\text{ °C}$ | $\varepsilon_{SL105}$ | % of $I_{PN}$           |                     |                     | $\pm 4.1$           | See formula note <sup>1)</sup>          |

**Note:** <sup>1)</sup> Error @  $I_P$  and  $T_A = \pm [\varepsilon_{SL} + (TCS/10000) \cdot (T_A - 25) + TCU_{OE} \cdot 100 \cdot (T_A - 25) / (S_N \cdot I_P)]$ .

Page 5/19

At  $T_A = 25\text{ °C}$ ,  $U_C = +3.3\text{ V}$ ,  $N_P = 1$  turn,  $R_L = 10\text{ K}\Omega$  unless otherwise noted (see Min, Max, typ. definition paragraph in [page 8](#)).

| Parameter   | Symbol              | Unit                    | Min                 | Typ                 | Max                 | Comment                                  |
|---|---------------------|-------------------------|---------------------|---------------------|---------------------|--|
| Primary nominal RMS current   | $I_{PN}$            | At                      |                     | 15                  |                     |  |
| Primary current, measuring range  | $I_{PM}$            | At                      | -37.5               |                     | 37.5                |  |
| Number of primary turns   | $N_P$               |                         |                     | 1,2,3               |                     |  |
| Supply voltage  | $U_C$               | V                       | 3.14                | 3.3                 | 3.46                |  |
| Current consumption   | $I_C$               | mA                      |                     |                     | 25                  |  |
| Reference voltage   | $U_{ref}$           | V                       | 1.636               | 1.65                | 1.664               | Internal reference                       |
| External reference voltage  | $U_{ref}$           | V                       | 0.5                 |                     | 1.85                | @ $U_C = 3.3 \approx 3.46\text{ V}$      |
|   |                     |                         | 0.5                 |                     | 1.7                 | @ $U_C = 3.14 \approx 3.46\text{ V}$     |
| Output voltage range @ $I_{PM}$   | $U_{out} - U_{ref}$ | V                       | -1.15               |                     | 1.15                |  |
| Output voltage @ $I_P = 0\text{ A}$   | $U_{out}$           | V                       |                     | $U_{ref} + U_{OE}$  |                     |  |
| Electrical offset voltage   | $U_{OE}$            | mV                      | -5                  |                     | 5                   |  |
| Temperature coefficient of $U_{ref}$  | $TCU_{ref}$         | ppm/K                   |                     |                     | $\pm 170$           | -20 °C ... 85 °C<br>Internal reference   |
|   |                     |                         |                     |                     | $\pm 180$           | -40 °C ... 105 °C<br>Internal reference  |
| Temperature coefficient of $U_{OE}$   | $TCU_{OE}$          | mV/K                    |                     |                     | $\pm 0.080$         | -40 °C ... 105 °C                        |
| Nominal sensitivity   | $S_N$               | mV/A                    |                     | 30.67               |                     | 460 mV / $I_{PN}$ @ $U_C = 3.3\text{ V}$ |
| Sensitivity error   | $\epsilon_S$        | %                       |                     |                     | $\pm 0.5$           | Factory adjustment                       |
| Temperature coefficient of $S$  | $TCS$               | ppm/K                   |                     |                     | $\pm 200$           | -20 °C ... 85 °C                         |
|   |                     |                         |                     |                     | $\pm 210$           | -40 °C ... 105 °C                        |
| Linearity error 0 ... $I_{PN}$  | $\epsilon_L$        | % of $I_{PN}$           |                     |                     | $\pm 0.5$           | @ $U_C = 3.3\text{ V}$                   |
| Linearity error 0 ... $I_{PM}$  | $\epsilon_L$        | % of $I_{PM}$           |                     |                     | $\pm 0.8$           | @ $U_C = 3.3\text{ V}$                   |
| Sensitivity error with respect to $U_C \pm 10\%$                              | $\epsilon_S$        | %/%                     |                     |                     | $\pm 0.4$           | Sensitivity error per $U_C$ drift        |
| Magnetic offset voltage<br>@ $I_P = 0$ after $2.5 \times I_{PN}$              | $U_{OM}$            | mV                      |                     |                     | $\pm 4$             |  |
| Delay time @ 10 % of the final output value $I_{PN}$ step                     | $t_{D10}$           | $\mu\text{s}$           |                     |                     | 2                   | $di/dt = I_{PN}/\mu\text{s}$             |
| Delay time @ 90 % of the final output value $I_{PN}$ step                     | $t_{D90}$           | $\mu\text{s}$           |                     |                     | 3.5                 | $di/dt = I_{PN}/\mu\text{s}$             |
| Frequency bandwidth (-3 dB)   | $BW$                | kHz                     |                     | 250                 |                     |  |
| Noise voltage spectral density<br>(DC ... 100 kHz)                            | $u_{no}$            | $\mu\text{V}/\text{Hz}$ |                     |                     | 10.15               |  |
| RMS noise voltage<br>(DC ... 20 MHz)  | $U_{no}$            | mVpp                    |                     | 30                  |                     |  |
| Standby pin "0" level   |                     | V                       |                     |                     | 0.3                 |  |
| Standby pin "1" level   |                     | V                       | $U_C - 0.3$         |                     |                     |  |
| Time to switch from standby to normal mode                                    |                     | $\mu\text{s}$           |                     |                     | 20                  |  |
| Overcurrent detection   |                     | At                      | $2.6 \times I_{PN}$ | $2.9 \times I_{PN}$ | $3.2 \times I_{PN}$ | peak value                               |
| Sum of sensitivity and linearity error @ $I_{PN}$                             | $\epsilon_{SL}$     | % of $I_{PN}$           |                     |                     | $\pm 1$             | $= \epsilon_S + \epsilon_L$              |
| Sum of sensitivity and linearity error @ $I_{PN}$<br>@ $T_A = +85\text{ °C}$  | $\epsilon_{SL85}$   | % of $I_{PN}$           |                     |                     | $\pm 3.3$           | See formula note <sup>1)</sup>           |
| Sum of sensitivity and linearity error @ $I_{PN}$<br>@ $T_A = +105\text{ °C}$ | $\epsilon_{SL105}$  | % of $I_{PN}$           |                     |                     | $\pm 4.1$           | See formula note <sup>1)</sup>           |

Note: <sup>1)</sup> Error @  $I_P$  and  $T_A = \pm [\epsilon_{SL} + (TCS/10000) \cdot (T_A - 25) + TCU_{OE} \cdot 100 \cdot (T_A - 25) / (S_N \cdot I_P)]$ .

At  $T_A = 25\text{ °C}$ ,  $U_C = +3.3\text{ V}$ ,  $N_p = 1\text{ turn}$ ,  $R_L = 10\text{ K}\Omega$  unless otherwise noted (see Min, Max, typ. definition paragraph in [page 8](#)).

| Parameter   | Symbol              | Unit                          | Min                 | Typ                 | Max                 | Comment                                 |
|---|---------------------|-------------------------------|---------------------|---------------------|---------------------|---|
| Primary nominal RMS current   | $I_{PN}$            | At                            |                     | 25                  |                     |   |
| Primary current, measuring range  | $I_{PM}$            | At                            | -62.5               |                     | 62.5                |   |
| Number of primary turns   | $N_p$               |                               |                     | 1,2,3               |                     |   |
| Supply voltage  | $U_C$               | V                             | 3.14                | 3.3                 | 3.46                |   |
| Current consumption   | $I_C$               | mA                            |                     |                     | 25                  |   |
| Reference voltage   | $U_{ref}$           | V                             | 1.636               | 1.65                | 1.664               | Internal reference                      |
| External reference voltage  | $U_{ref}$           | V                             | 0.5                 |                     | 1.85                | @ $U_C = 3.3 \approx 3.46\text{ V}$     |
|   |                     |                               | 0.5                 |                     | 1.7                 | @ $U_C = 3.14 \approx 3.3\text{ V}$     |
| Output voltage range @ $I_{PM}$   | $U_{out} - U_{ref}$ | V                             | -1.15               |                     | 1.15                |   |
| Output voltage @ $I_p = 0\text{ A}$   | $U_{out}$           | V                             |                     | $U_{ref} + U_{OE}$  |                     |   |
| Electrical offset voltage   | $U_{OE}$            | mV                            | -6                  |                     | 6                   |   |
| Temperature coefficient of $U_{ref}$  | $TCU_{ref}$         | ppm/K                         |                     |                     | $\pm 170$           | -20 °C ... 85 °C<br>Internal reference  |
|   |                     |                               |                     |                     | $\pm 180$           | -40 °C ... 105 °C<br>Internal reference |
| Temperature coefficient of $U_{OE}$   | $TCU_{OE}$          | mV/K                          |                     |                     | $\pm 0.080$         | -40 °C ... 105 °C                       |
| Nominal sensitivity   | $S_N$               | mV/A                          |                     | 18.4                |                     | 460 mV/ $I_{PN}$ @ $U_C = 3.3\text{ V}$ |
| Sensitivity error   | $\epsilon_s$        | %                             |                     |                     | $\pm 0.5$           | Factory adjustment                      |
|   |                     |                               |                     |                     | $\pm 200$           | -20 °C ... 85 °C                        |
| Temperature coefficient of $S$  | $TCS$               | ppm/K                         |                     |                     | $\pm 210$           | -40 °C ... 105 °C                       |
|   |                     |                               |                     |                     |                     |   |
| Linearity error 0 ... $I_{PN}$  | $\epsilon_L$        | % of $I_{PN}$                 |                     |                     | $\pm 0.5$           | @ $U_C = 3.3\text{ V}$                  |
| Linearity error 0 ... $I_{PM}$  | $\epsilon_L$        | % of $I_{PM}$                 |                     |                     | $\pm 0.8$           | @ $U_C = 3.3\text{ V}$                  |
| Sensitivity error with respect to $U_C \pm 10\%$                              | $\epsilon_s$        | %/%                           |                     |                     | $\pm 0.4$           | Sensitivity error per $U_C$ drift       |
| Magnetic offset voltage<br>@ $I_p = 0$ after $2.5 \times I_{PN}$              | $U_{OM}$            | mV                            |                     |                     | $\pm 4$             |   |
| Delay time @ 10 % of the final output value $I_{PN}$<br>step                  | $t_{D10}$           | $\mu\text{s}$                 |                     |                     | 2                   | $di/dt = I_{PN}/\mu\text{s}$            |
| Delay time @ 90 % of the final output value $I_{PN}$<br>step                  | $t_{D90}$           | $\mu\text{s}$                 |                     |                     | 3.5                 | $di/dt = I_{PN}/\mu\text{s}$            |
| Frequency bandwidth (-3 dB)   | $BW$                | kHz                           |                     | 250                 |                     |   |
| Noise voltage spectral density<br>(DC ... 100 kHz)                            | $u_{no}$            | $\mu\text{V}/\text{Hz}^{1/2}$ |                     |                     | 6.13                |   |
| RMS noise voltage<br>(DC ... 20 MHz)  | $U_{no}$            | mVpp                          |                     | 20                  |                     |   |
| Standby pin "0" level   |                     | V                             |                     |                     | 0.3                 |   |
| Standby pin "1" level   |                     | V                             | $U_C - 0.3$         |                     |                     |   |
| Time to switch from standby to normal mode                                    |                     | $\mu\text{s}$                 |                     |                     | 20                  |   |
| Overcurrent detection   |                     | At                            | $2.6 \times I_{PN}$ | $2.9 \times I_{PN}$ | $3.2 \times I_{PN}$ | peak value                              |
| Sum of sensitivity and linearity error @ $I_{PN}$                             | $\epsilon_{SL}$     | % of $I_{PN}$                 |                     |                     | $\pm 1$             | $= \epsilon_s + \epsilon_L$             |
| Sum of sensitivity and linearity error @ $I_{PN}$<br>@ $T_A = +85\text{ °C}$  | $\epsilon_{SL85}$   | % of $I_{PN}$                 |                     |                     | $\pm 3.3$           | See formula note <sup>1)</sup>          |
| Sum of sensitivity and linearity error @ $I_{PN}$<br>@ $T_A = +105\text{ °C}$ | $\epsilon_{SL105}$  | % of $I_{PN}$                 |                     |                     | $\pm 4.1$           | See formula note <sup>1)</sup>          |

**Note:** <sup>1)</sup> Error @  $I_p$  and  $T_A = \pm [\epsilon_{SL} + (TCS/10000) \cdot (T_A - 25) + TCU_{OE} \cdot 100 \cdot (T_A - 25) / (S_N \cdot I_p)]$ .

Page 7/19

**Definition of typical, minimum and maximum values**

Minimum and maximum values for specified limiting and safety conditions have to be understood as such as well as values shown in “typical” graphs.

On the other hand, measured values are part of a statistical distribution that can be specified by an interval with upper and lower limits and a probability for measured values to lie within this interval.

Unless otherwise stated (e.g. “100 % tested”), the LEM definition for such intervals designated with “min” and “max” is that the probability for values of samples to lie in this interval is 99.73 %.

For a normal (Gaussian) distribution, this corresponds to an interval between  $-3$  sigma and  $+3$  sigma. If “typical” values are not obviously mean or average values, those values are defined to delimit intervals with a probability of 68.27 %, corresponding to an interval between  $-\text{sigma}$  and  $+\text{sigma}$  for a normal distribution.

Typical, maximal and minimal values are determined during the initial characterization of a product.



Typical performance characteristics  $I_{PN} = 8\text{ A}$

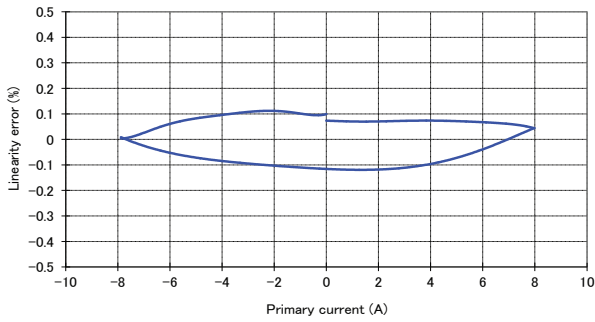


Figure 1: Linearity error

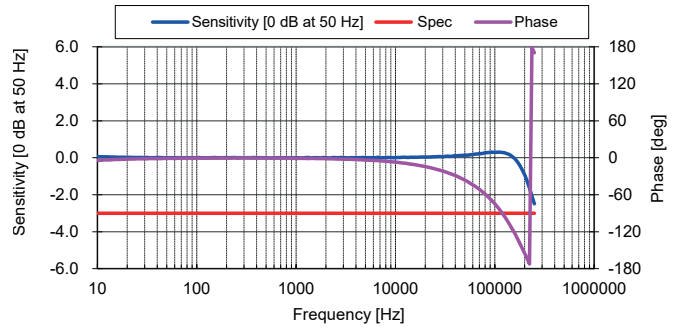


Figure 2: Frequency response

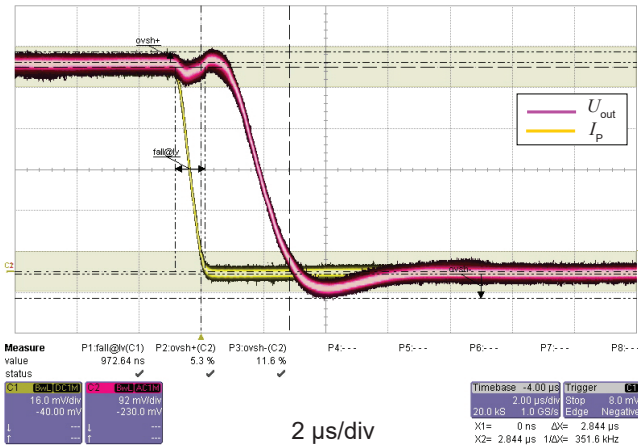


Figure 3: Step response

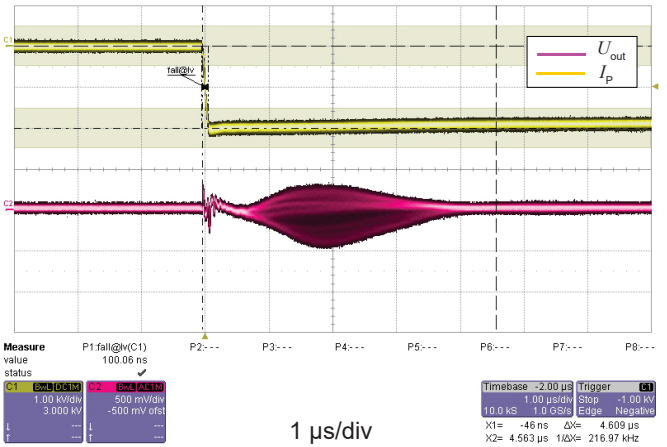


Figure 4: dv/dt

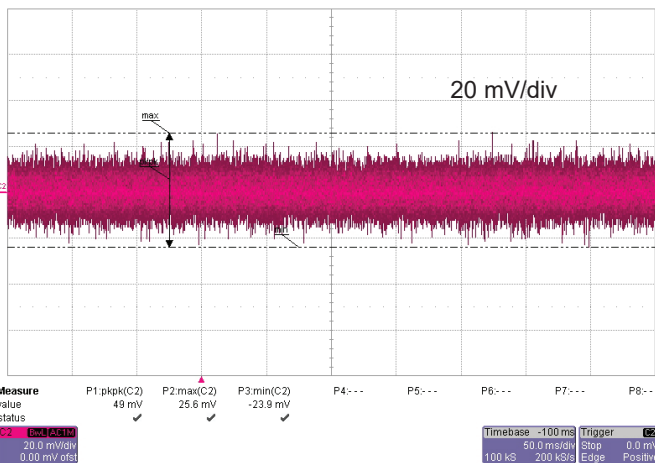


Figure 5: Output noise

Typical performance characteristics  $I_{PN} = 15\text{ A}$

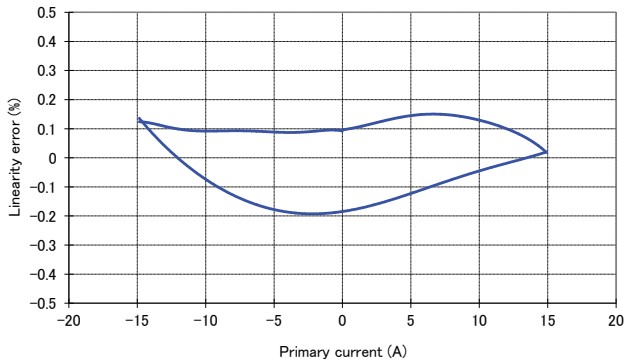


Figure 6: Linearity error

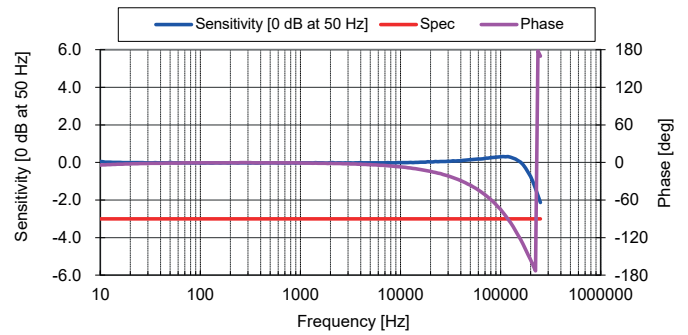


Figure 7: Frequency response

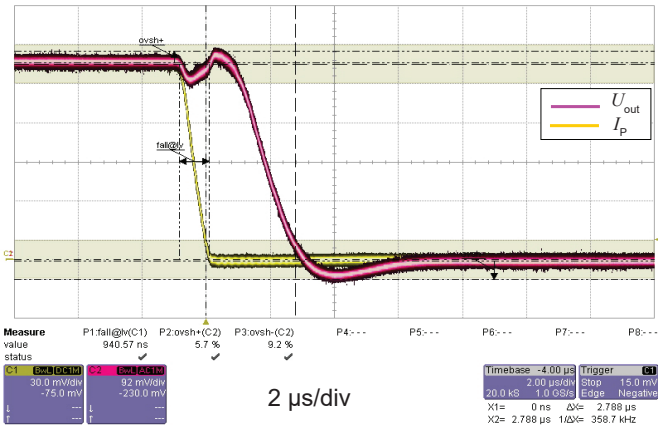


Figure 8: Step response

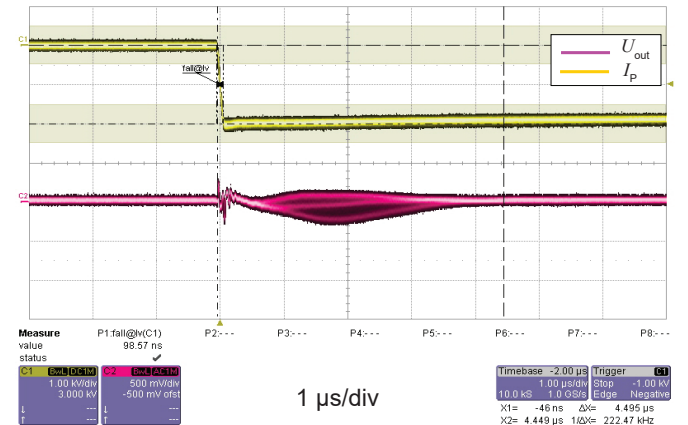


Figure 9:  $dv/dt$

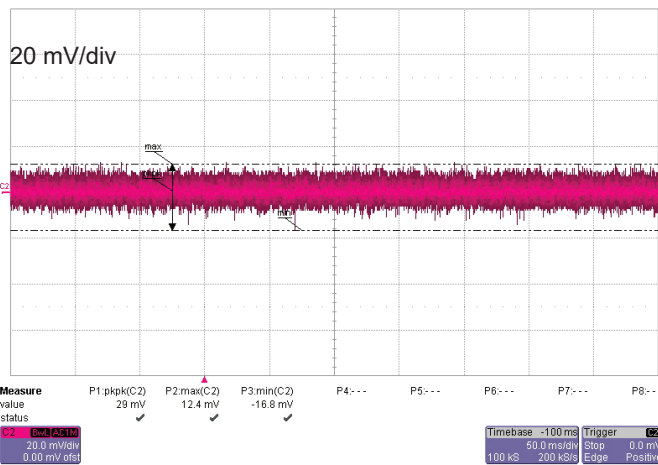


Figure 10: Output noise

Typical performance characteristics  $I_{PN} = 25\text{ A}$

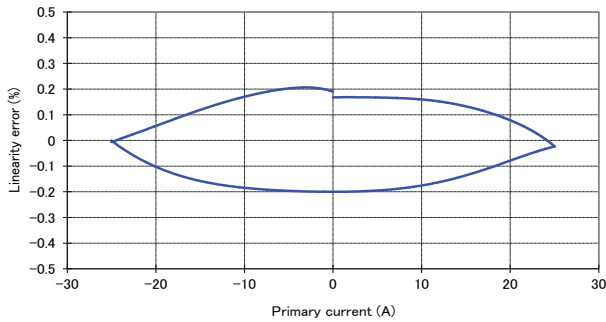


Figure 11: Linearity error

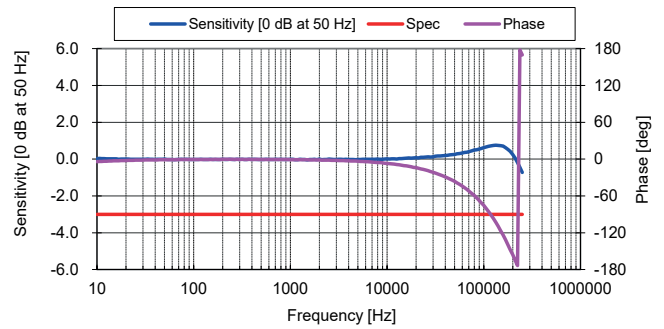


Figure 12: Frequency response

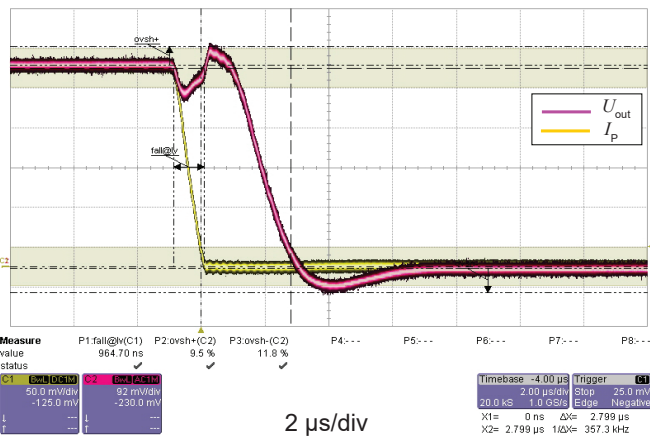


Figure 13: Step response

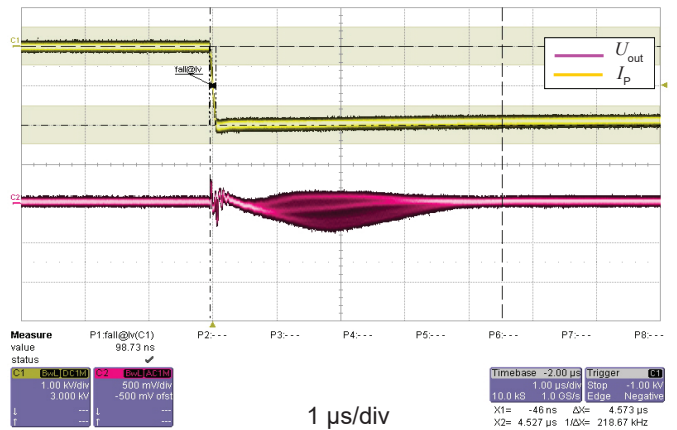


Figure 14: dv/dt

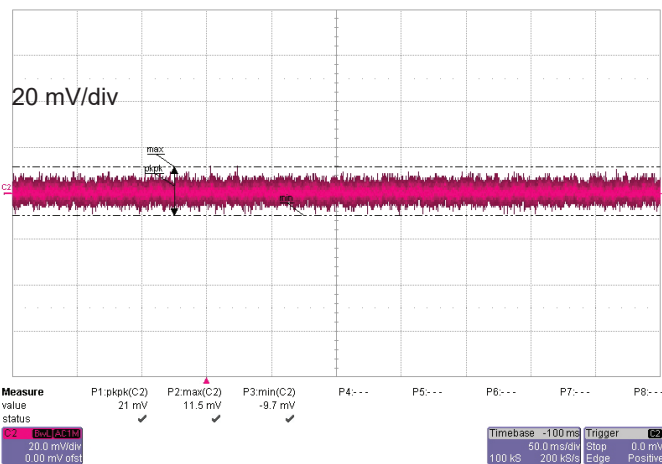


Figure 15: Output noise

Maximum continuous DC primary current

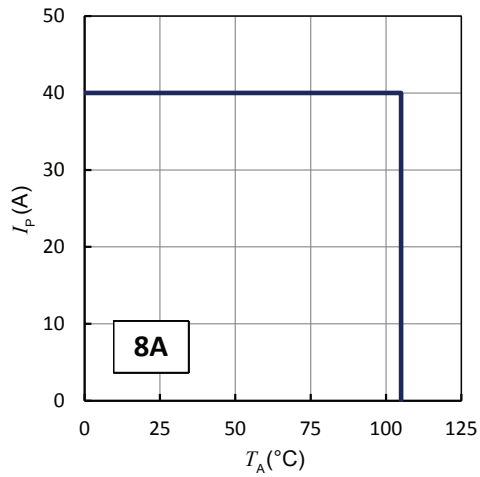


Figure 16:  $I_p$  vs  $T_A$  for HO series

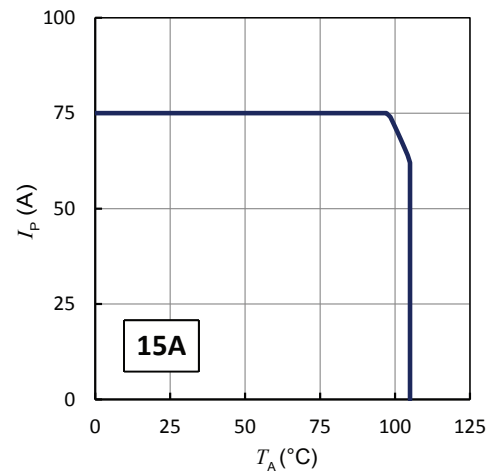


Figure 17:  $I_p$  vs  $T_A$  for HO series


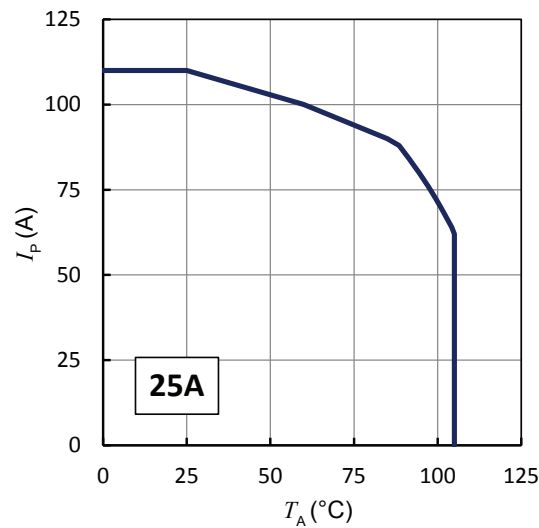


Figure 18:  $I_p$  vs  $T_A$  for HO series


**Important notice:** whatever the usage and/or application, the transducer jumper temperature shall not go above the maximum rating of 120 °C as stated in [page 3](#) of this datasheet.

### Measuring range with external reference voltage

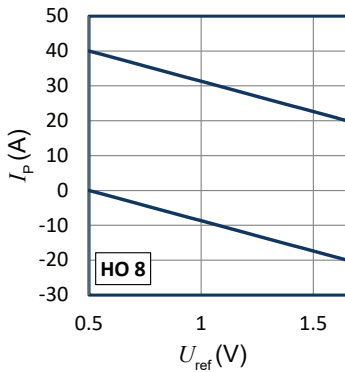


Upper limit:  $I_p = 17.39 \times U_{ref} + 48.7$  ( $U_{ref} = 0.5 \dots 1.65$  V)

Lower limit:  $I_p = 17.39 \times U_{ref} + 8.7$  ( $U_{ref} = 0.5 \dots 1.65$  V)

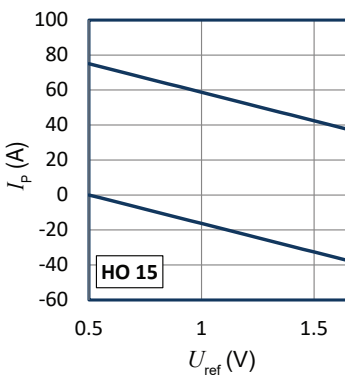

Upper limit:  $I_p = -32.81 \times U_{ref} + 91.3$  ( $U_{ref} = 0.5 \dots 1.65$  V)

Lower limit:  $I_p = -32.81 \times U_{ref} + 16.3$  ( $U_{ref} = 0.5 \dots 1.65$  V)

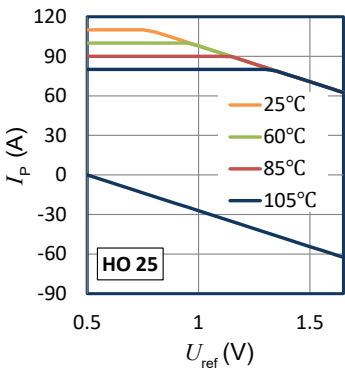

Upper limit:

$T_A = 105 \text{ }^\circ\text{C}$   $I_p = 80$  ( $U_{ref} = 0.5 \dots 1.328$  V)  
 $I_p = -54.35 \times U_{ref} + 152.17$  ( $U_{ref} = 1.328 \dots 1.65$  V)

$T_A = 85 \text{ }^\circ\text{C}$   $I_p = 90$  ( $U_{ref} = 0.5 \dots 1.144$  V)  
 $I_p = -54.35 \times U_{ref} + 152.17$  ( $U_{ref} = 1.144 \dots 1.65$  V)

$T_A = 80 \text{ }^\circ\text{C}$   $I_p = 100$  ( $U_{ref} = 0.5 \dots 0.96$  V)  
 $I_p = -54.35 \times U_{ref} + 152.17$  ( $U_{ref} = 0.96 \dots 1.65$  V)

$T_A = 25 \text{ }^\circ\text{C}$   $I_p = 110$  ( $U_{ref} = 0.5 \dots 0.776$  V)  
 $I_p = -54.35 \times U_{ref} + 152.17$  ( $U_{ref} = 0.776 \dots 1.65$  V)

Lower limit:  $I_p = -54.35 \times U_{ref} + 27.17$  ( $U_{ref} = 0.5 \dots 1.65$  V)

Example with  $U_{ref} = 0.5$  V:

- The 8 A version has a measuring range from 0 A to 40 A
- The 15 A version has a measuring range from 0 A to 75 A
- The 25 A version has a measuring range from 0 A to 80 A at  $T_A = 105 \text{ }^\circ\text{C}$

Example with  $U_{ref} = 1.5$  V:

- The 8 A version has a measuring range from -17.4 A to + 22.6 A
- The 15 A version has a measuring range from -32.6 A to + 42.4 A
- The 25 A version has a measuring range from -54.4 A to + 70.6 A

## Terms and definitions

### Ampere-turns and amperes

The transducer is sensitive to the primary current linkage  $\theta_p$  (also called ampere-turns).

$$\theta_p = N_p \cdot I_p$$

Where  $N_p$  is the number of primary turn (depending on the connection of the primary jumpers).

Caution: As most applications will use the transducer with only one single primary turn ( $N_p = 1$ ), much of this datasheet is written in terms of primary current instead of current linkages. However, the ampere-turns (A) unit is used to emphasis that current linkages are intended and applicable.

### Simplified transducer model

The static model of the transducer with voltage output at temperature  $T_A$  is:

$$U_{out} = S \cdot \theta_p (1 + \varepsilon)$$

In which (referred to primary):

$$\varepsilon \cdot \theta_p = U_{OE} + U_{OT} + \varepsilon_S \cdot \theta_p + \varepsilon_{ST} \cdot \theta_p + \varepsilon_L(\theta_{Pmax}) \cdot \theta_{Pmax} + I_{OM}$$

$\theta_p = N_p \cdot I_p$ : primary current linkage (A)

$\theta_{Pmax}$ : maximum primary current linkage applied to the transducer

$U_{out}$ : output voltage (V)

$S$ : sensitivity of the transducer

$T_A$ : ambient operating temperature (°C)

$U_{OE}$ : electrical offset voltage (A)

$I_{OM}$ : magnetic offset current (A)

$U_{OT}$ : temperature variation of  $U_{OE}$  (A)

$\varepsilon_S$ : sensitivity error at 25 °C

$\varepsilon_{ST}$ : thermal drift of  $S$

$\varepsilon_L(\theta_{Pmax})$ : linearity error for  $\theta_{Pmax}$

This model is valid for primary ampere-turns  $\theta_p$  between  $-\theta_{Pmax}$  and  $+\theta_{Pmax}$  only.

This is the absolute maximum error. As all errors are independent, a more realistic way to calculate the error would be to use the following formula:

$$\varepsilon = \sqrt{\sum_{i=1}^N \varepsilon_i^2}$$

### Total error referred to primary

The total error  $\varepsilon_{tot}$  is the error at  $\pm I_{PN}$ , relative to the rated value  $I_{PN}$ .

It includes all errors mentioned above:

- the electrical offset  $U_{OE}$
- the magnetic offset  $I_{OM}$
- the sensitivity error  $\varepsilon_S$
- the linearity error  $\varepsilon_L$  (to  $I_{PN}$ ).

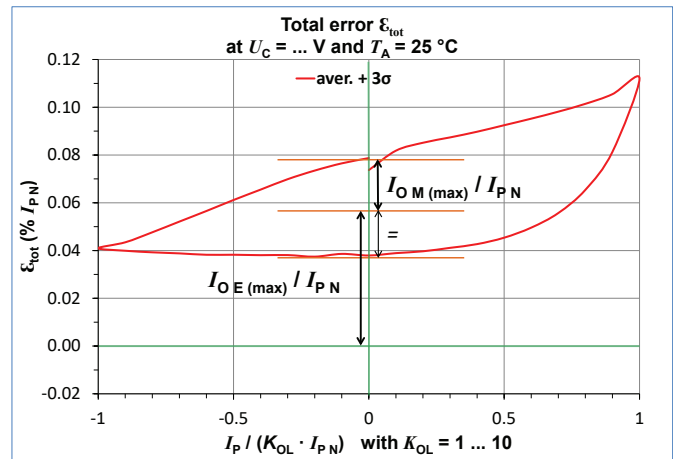


Figure 19: Total error  $\varepsilon_{tot}$

### Electrical offset referred to primary

Using the current cycle shown in figure 19, the electrical offset current  $I_{OE}$  is the residual output referred to primary when the input current is zero.

$$U_{OE} = \frac{I_{P(3)} + I_{P(5)}}{2}$$

The temperature variation  $U_{OT}$  of the electrical offset current  $I_{OE}$  is the variation of the electrical offset from 25 °C to the considered temperature.

$$U_{OT}(T) = U_{OE}(T) - U_{OE}(25 \text{ °C})$$

### Magnetic offset referred to primary

The magnetic offset current  $I_{OM}$  is the consequence of a current on the primary side ("memory effect" of the transducer's ferro-magnetic parts). It is measured using the following primary current cycle.  $I_{OM}$  depends on the current value  $I_p \geq I_{PN}$ .

$K_{OL}$ : Overload factor

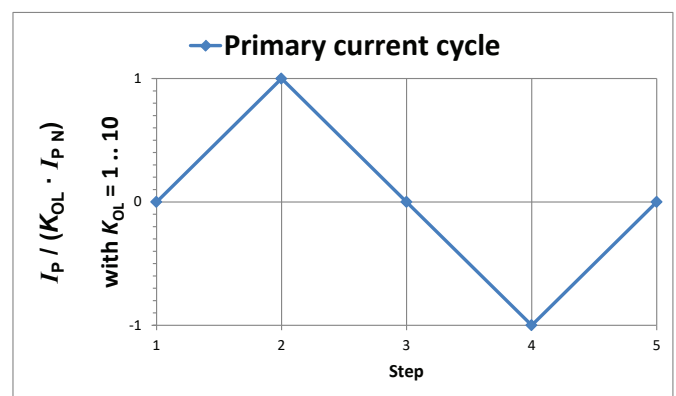


Figure 20: Current cycle used to measure magnetic and electrical offset (transducer supplied)

$$I_{OM} = \frac{I_{P(3)} - I_{P(5)}}{2}$$

## Performance parameters definition

### Sensitivity and linearity

To measure sensitivity and linearity, the primary current (DC) is cycled from 0 to  $I_P$ , then to  $-I_P$  and back to 0 (equally spaced  $I_P/10$  steps). The sensitivity  $S$  is defined as the slope of the linear regression line for a cycle between  $\pm I_{PN}$ .

The linearity error  $\varepsilon_L$  is the maximum positive or negative difference between the measured points and the linear regression line, expressed in % of  $I_{PN}$ .

### Delay times

The delay time  $t_{D,10}$  @ 10 % and the delay time  $t_{D,90}$  @ 90 % with respect to the primary are shown in the next figure.

Both slightly depend on the primary current  $di/dt$ . They are measured at nominal current.

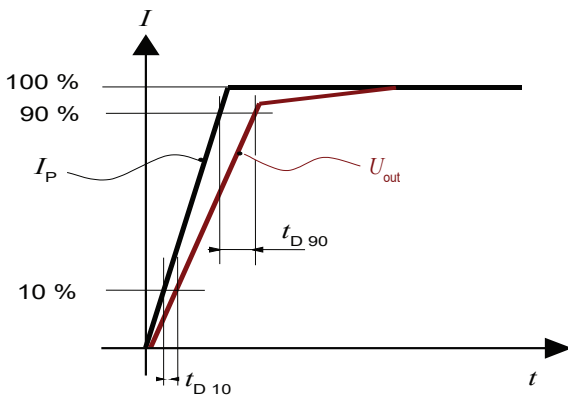





Figure 21 :Delay time  $t_{D,90}$  @ 90 and delay time  $t_{D,10}$  @10

## Application information

### Total primary resistance

The primary resistance is 0.36 mΩ per conductor at 25 °C.

In the following table, examples of primary resistance according to the number of primary turns.


| Number of primary turns<br>$N_P$ | Resistance of primary (winding)<br>$R_P$ [ mΩ ] | Recommended connections  | Primary nominal RMS current<br>$I_{P,N}$ [ A ] |     |      |
|----------------------------------|---|--|--|-----|------|
|                                  |   |  | 8  | 15  | 25   |
| 1                                | 0.12  |  | 8  | 15  | 25   |
| 2                                | 0.54  |  | 4  | 7.5 | 12.5 |
| 3                                | 1.18  |  | 2.67   | 5   | 8.33 |



### HO-NSM/SP33 Series: name and codification

HO family products may be ordered **on request** <sup>1)</sup> with a dedicated setting of the parameters described below (standard products are delivered with the setting 1000 according to the table).


**HO 15-NSM/SP33-XXXX**

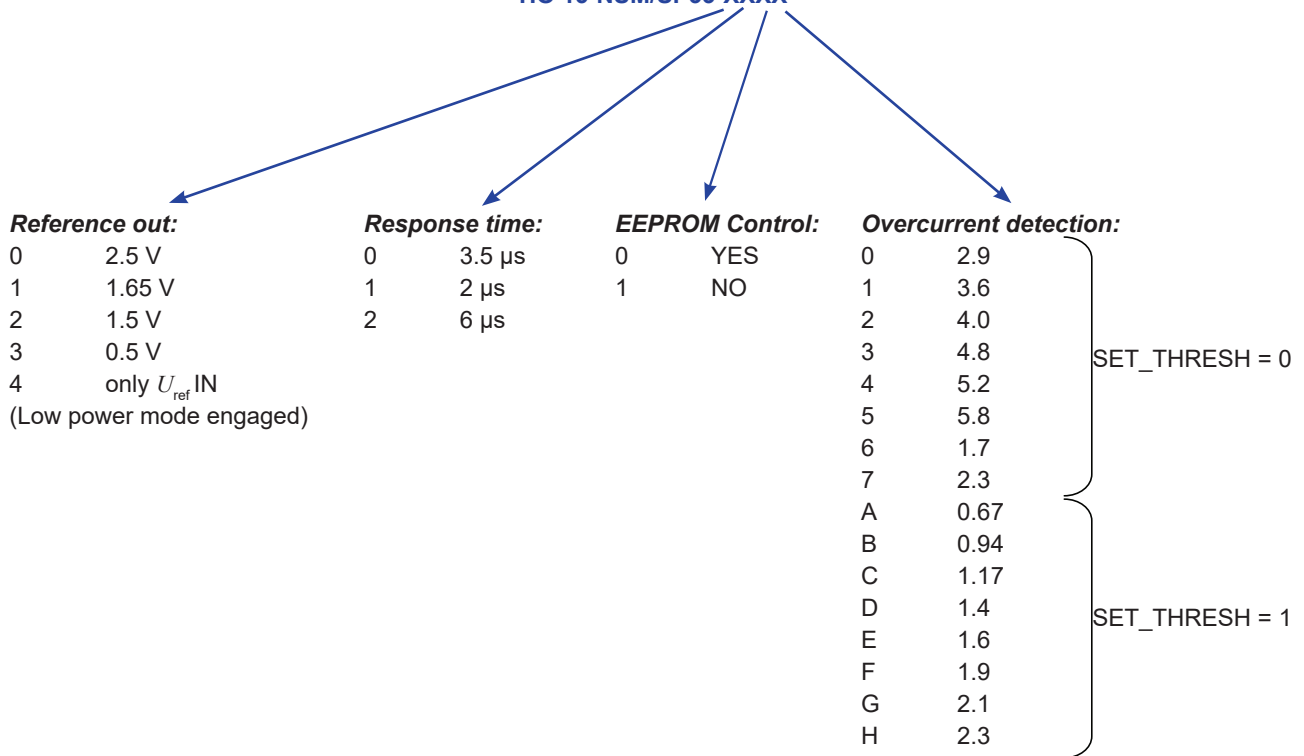


Standard products are:  
 - HO 8-NSM/SP33-1000  
 - HO 15-NSM/SP33-1000  
 - HO 25-NSM/SP33-1000

Note: <sup>1)</sup> For dedicated settings, minimum quantities apply.

PCB Footprint

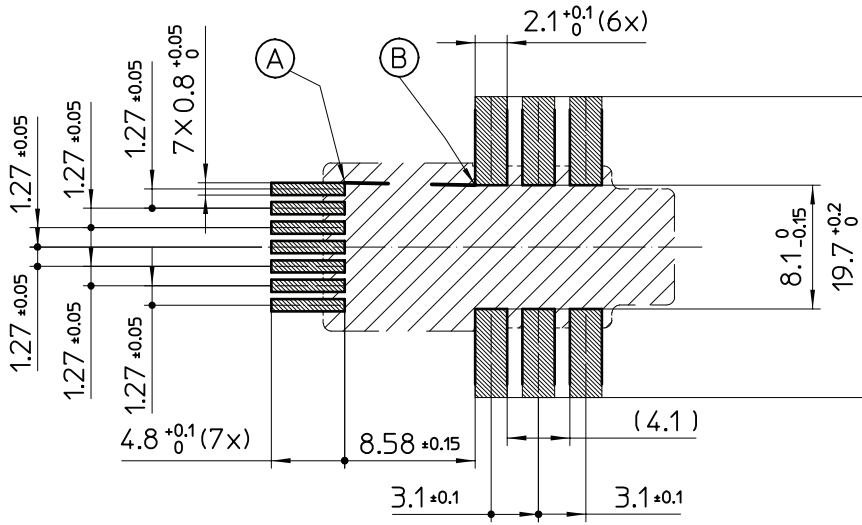

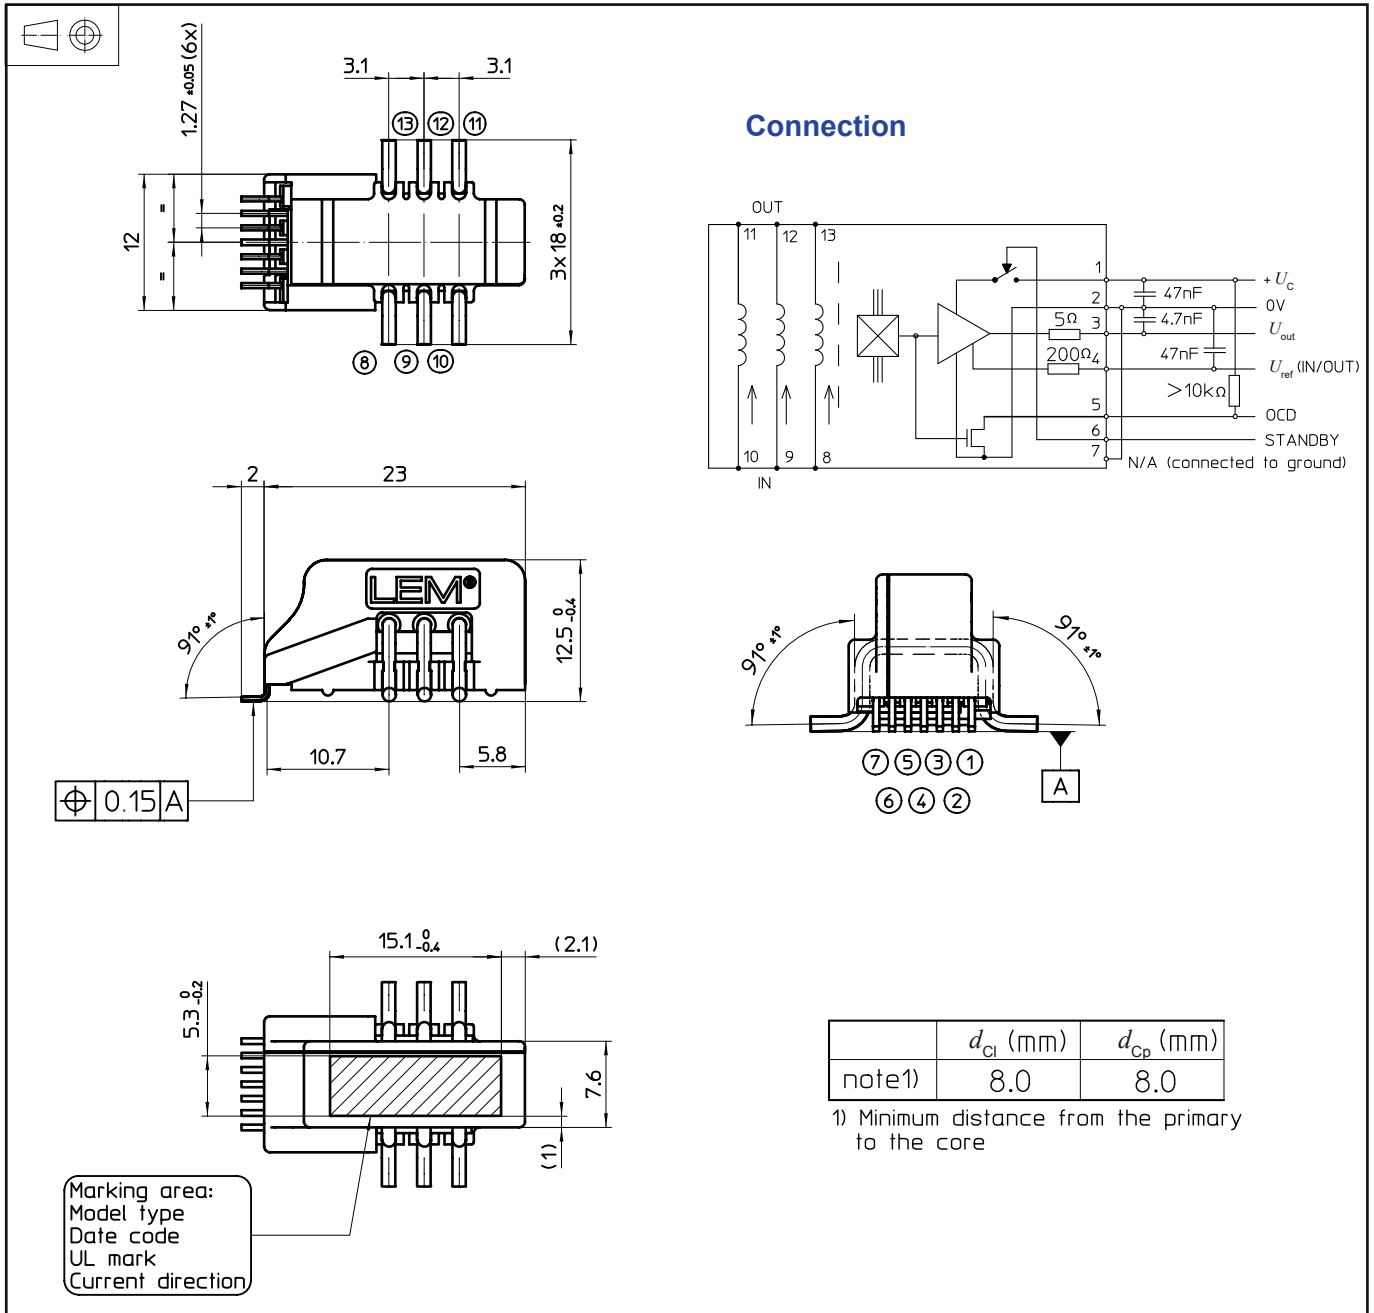**Dimensions HO 8-NSM/SP33, 15-NSM/SP33, 25-NSM/SP33** (in mm, general linear tolerance  $\pm 0.5$  mm)


单击下面可查看定价，库存，交付和生命周期等信息

[>>LEM\(莱姆\)](#)