



Photocoupler
Product Data Sheet
LTV-3213

Spec No. :DS70-2018-0163
Effective Date: 01/10/2019
Revision: A

LITE-ON DCC

RELEASE

BNS-OD-FC001/A4



Photocoupler LTV-22X3 series LTV-32X3 series

1. DESCRIPTION

Solid State Relays (SSR) are integration of an AlGaAs Light Emitting Diode, a Phototriac Detector and a main power Triac. These devices are ideally suited for controlling high voltage AC loads with solid state reliability while providing 5 KV isolation ($V_{iso}(rms)$) between input to output.

1.1 Features

- 8 pin DIP package
- High repetitive peak off-state voltage V_{DRM} : Min. 600 V
- Isolation voltage between input and output V_{iso} : 5,000 V_{rms}
- Safety approval
VDE DIN EN 60747-5-5 / IEC 60747-5-5
UL 1577 (E113898)
UL 508 (E490256)
CUL CA5A (E113898)
CQC GB4943.1-2011/GB8898-2011 (meet Altitude up to 5000m)
DEMKO IEC/EN62368-1; IEC/EN 60950-1; IEC/EN 60065
- RoHS Compliance
All materials be used in device are followed EU RoHS directive (No.2002/95/EC)

| Part Number | Output Rating | | | Functional Diagram |
|-------------|------------------------|----------------------|---------------|---|
| | Peak Off-state Voltage | On-state RMS Current | Type | |
| LTV-2213 | 600 V | 0.9 A | Zero-Crossing |  |
| LTV-3213 | | 1.2 A | | |
| LTV-2223 | | 0.9 A | Random Phase |  |
| LTV-3223 | | 1.2 A | | |

1.2 Applications


- Home appliances
- Industrial equipment

Photocoupler LTV-22X3 series LTV-32X3 series

2. PACKAGE DIMENSIONS


2.1 Through Hole

LTV-X2X3

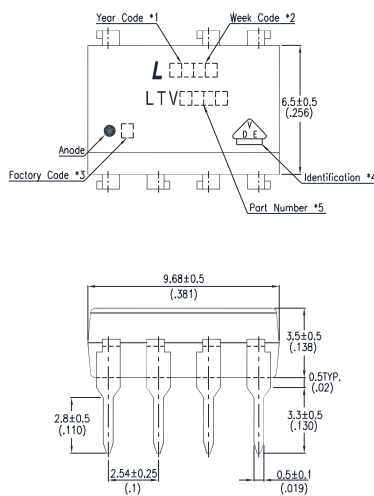


2.2 Wide Lead

LTV-X2X3M

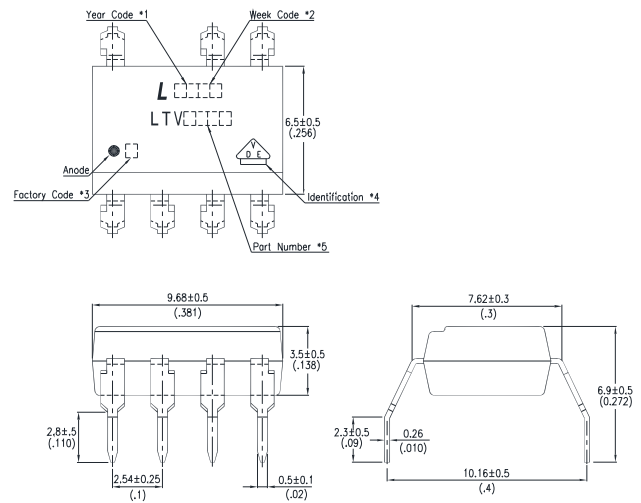

2.3 SMT

LTV-X2X3S

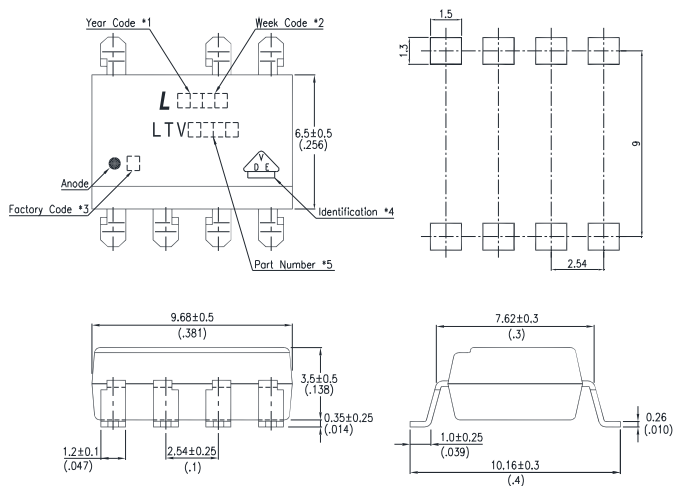

Notes:

1. 2-digit year code
2. 2-digit work week code
3. Factory identification mark shall be marked (W: China-CZ, Y: Thailand)
4. VDE option
5. Part number (LTV2213, LTV2223, LTV3213, LTV3223)


Dimensions in millimeters (inches)

Photocoupler LTV-22X3 series LTV-32X3 series

3. TAPING DIMENSIONS


3.1 LTV-22X3S-TA

LTV-32X3S-TA

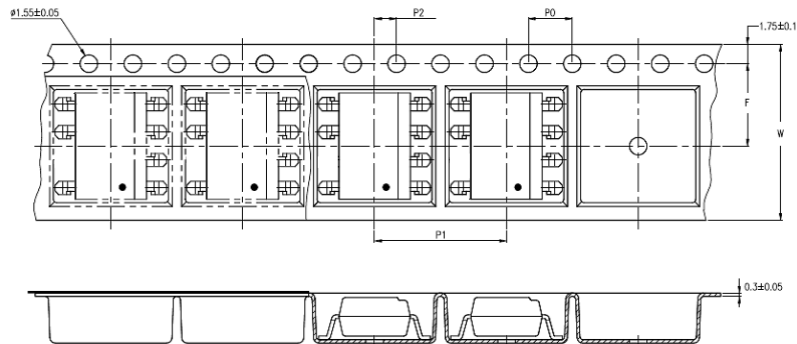

3.2 LTV-22X3S-TA1

LTV-32X3S-TA1

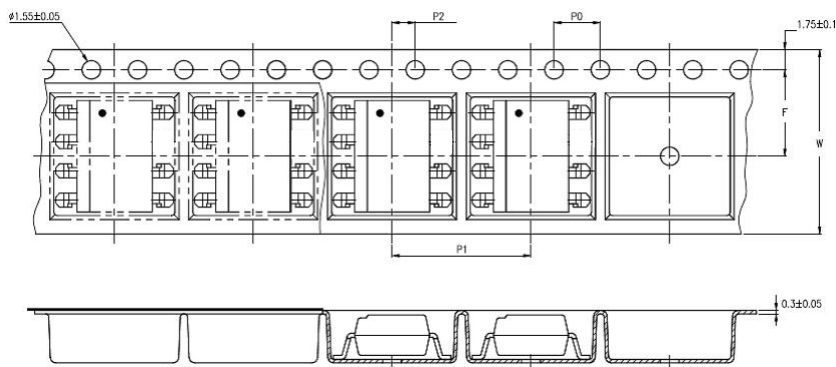

| Description | Symbol | Dimension in mm (inch) |
|--|----------------|------------------------|
| Tape wide | W | 16±0.3 (0.63) |
| Pitch of sprocket holes | P ₀ | 4±0.1 (0.15) |
| Distance of compartment | F | 7.5±0.1 (0.295) |
| | P ₂ | 2±0.1 (0.079) |
| Distance of compartment to compartment | P ₁ | 12±0.1 (0.47) |

3.3 Quantities Per Reel

| Package Type | LTV-22X3 series LTV-32X3 series |
|------------------|------------------------------------|
| Quantities (pcs) | 1000 |

3/10

Part No.: LTV-22X3, LTV-32X3
BNC-OD-FC002/A4
Rev.: 25-Jun'18

Photocoupler LTV-22X3 series LTV-32X3 series

4. RATING AND CHARACTERISTICS

4.1 Absolute Maximum Ratings at Ta=25°C

| Parameter | | Symbol | Rating | Unit |
|-----------|-----------------------------------|--------------------|------------|-----------|
| Input | Forward Current | I_F | 50 | mA |
| | Reverse Voltage | V_R | 6 | V |
| | Peak Forward Current | I_{FP} | 1 | A |
| | Junction Temperature | T_J | 125 | °C |
| | Power Dissipation | P_{in} | 140 | mW |
| Output | Repetitive peak OFF-state voltage | V_{DRM} | 600 | V |
| | ON-state RMS current | LTV-2213, LTV-2223 | 0.9 | A |
| | | LTV-3213, LTV-3223 | 1.2 | |
| | Non-repetitive Surge current *3 | LTV-2213, LTV-2223 | 9 | A |
| | | LTV-3213, LTV-3223 | 12 | |
| | Power Dissipation | P_{out} | 1100 | mW |
| *1. | Isolation Voltage | V_{iso} | 5000 | V_{rms} |
| | Operating Temperature | T_{opr} | -30 ~ +85 | °C |
| | Storage Temperature | T_{stg} | -40 ~ +125 | °C |
| *2. | Soldering Temperature | T_{sol} | 260 | °C |

1. AC For 1 Minute, R.H. = 40 ~ 60%
Isolation voltage shall be measured using the following method.
 - (1) Short between anode and cathode on the primary side and between collector and emitter on the secondary side.
 - (2) The isolation voltage tester with zero-cross circuit shall be used.
 - (3) The waveform of applied voltage shall be a sine wave.
2. For 10 Seconds
3. Sine wave; f=60Hz, 1 cycle

Photocoupler LTV-22X3 series LTV-32X3 series

4.2 ELECTRICAL OPTICAL CHARACTERISTICS at Ta=25°C

| | | Symbol | Min. | Typ. | Max. | Unit | Test Condition |
|--------------------------|---|-----------|--------------------|-----------|------|------------------------|---|
| Input | Forward Voltage | V_F | — | 1.2 | 1.3 | V | $I_F=20\text{mA}$ |
| | Reverse Current | I_R | — | — | 10 | μA | $V_R=6\text{V}$ |
| Output | Peak Blocking Current, Either Direction | I_{DRM} | — | — | 100 | μA | $I_F=0\text{mA}$ $V_{DRM} = 600\text{V}$ |
| | Peak On-State Voltage, Either Direction | V_{TM} | — | — | 2.5 | V | $I_F = 10\text{mA}$ $I_{TM} = \text{Max.}$ |
| | Critical rate of Rise of Off-State Voltage | dv/dt | 200 | — | — | $\text{V}/\mu\text{s}$ | $V_{DRM} = 600\text{V} \cdot 1/\sqrt{2}$ |
| Transfer characteristics | Led Trigger Current, Current Required to Latch Output, Either Direction | I_{FT} | — | — | 10 | mA | $V_D = 6\text{V}$ $R_L = 100\ \Omega$ |
| | Holding Current, Either Direction | I_H | — | — | 25 | mA | |
| | Zero Crossing Voltage (LTV-X213 Series) | V_{ZC} | — | — | 50 | V | $I_F = 10\text{mA}$ |
| | Turn on time | T_{ON} | — | — | 100 | μs | $I_F = 20\text{mA}$ $V_D = 6\text{V}$ $R_L = 100\ \Omega$ |
| | I/O isolation resistance | R_{ISO} | 5×10^{10} | 10^{11} | — | Ω | 500V DC |

5. CHARACTERISTICS CURVES (TYPICAL PERFORMACNE) AND TESTING DIAGRAM

Fig 1. ON-state RMS current vs.
Ambient Temperature

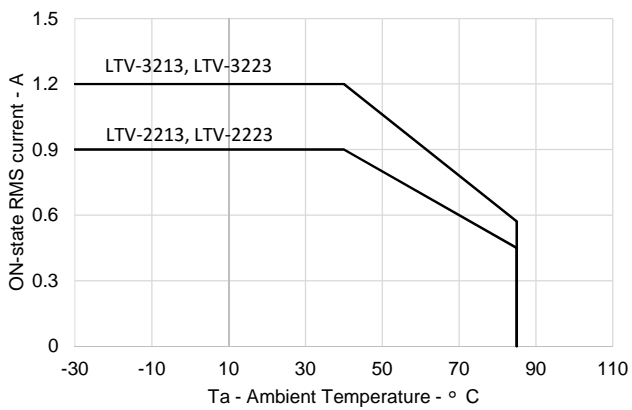


Fig 2. Peak ON-state voltage vs.
Ambient Temperature

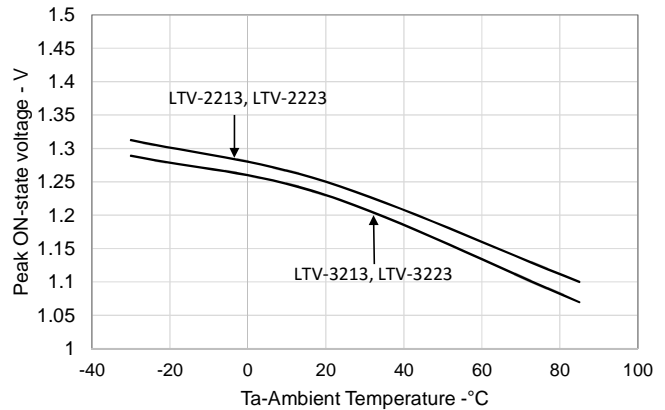


Fig 3. Trigger LED current vs.
Ambient Temperature


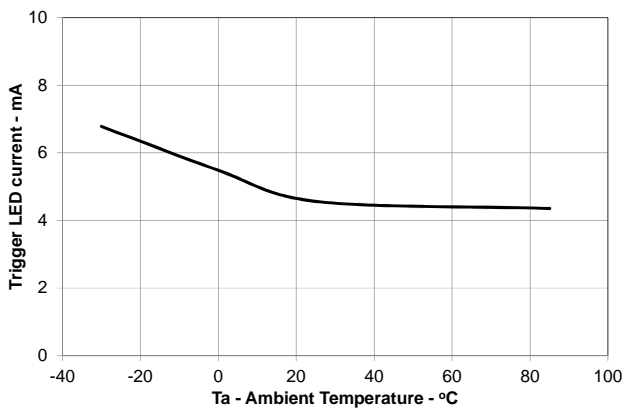


Fig 4. LED dropout voltage vs.
Ambient Temperature

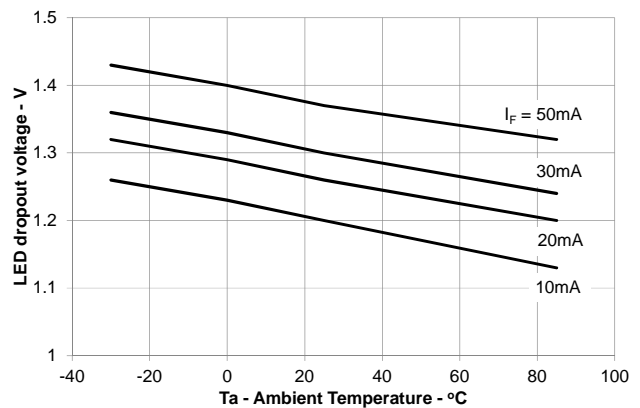

Photocoupler LTV-22X3 series LTV-32X3 series

Fig 5. Turn on time vs. LED current

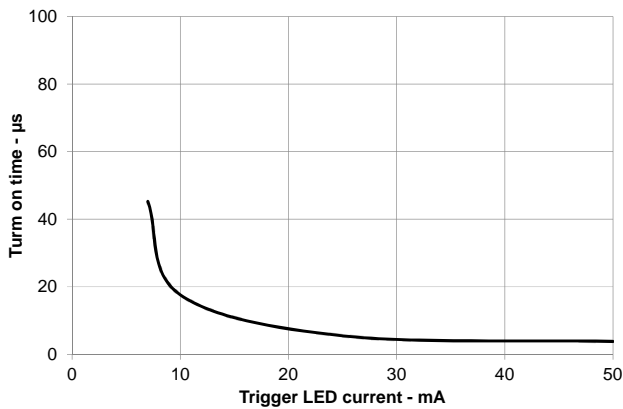


Fig 6. Repetitive peak OFF-state current vs. Load voltage

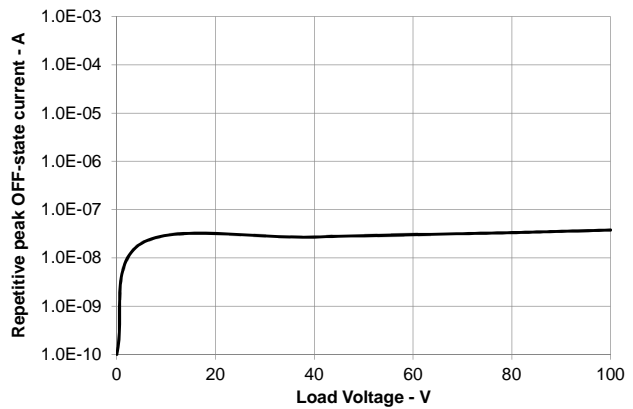


Fig 7. Hold current vs. Ambient Temperature

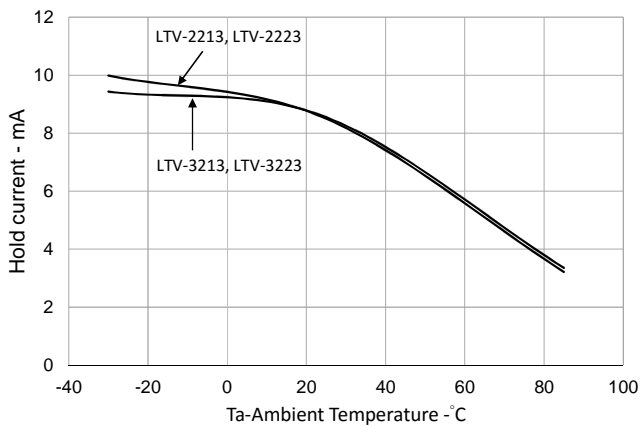


Fig.8 Testing diagram of Turn on time


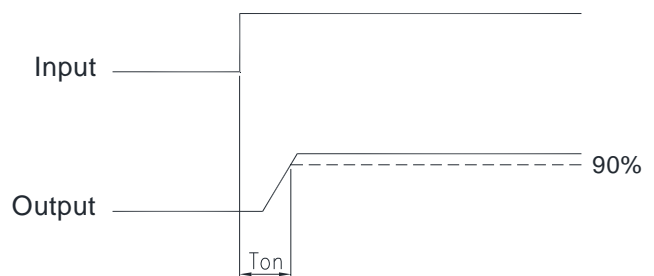


Fig 9. Basic diagrams

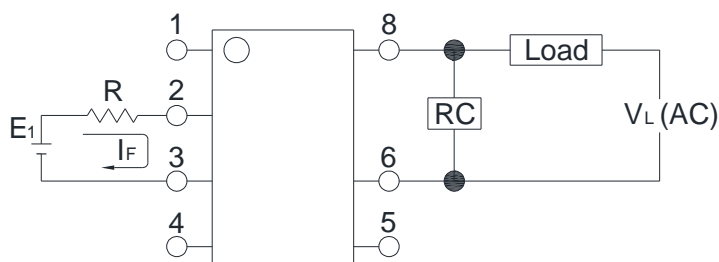

RC: Snubber circuit


Photocoupler LTV-22X3 series LTV-32X3 series

6. TEMPERATURE PROFILE OF SOLDERING

6.1 IR Reflow soldering (JEDEC-STD-020C compliant)

One time soldering reflow is recommended within the condition of temperature and time profile shown below. Do not solder more than twice.

| Profile item | Conditions |
|----------------------------------|----------------|
| Preheat | |
| - Temperature Min (T_{Smin}) | 150°C |
| - Temperature Max (T_{Smax}) | 200°C |
| - Time (min to max) (ts) | 90±30 sec |
| Soldering zone | |
| - Temperature (T_L) | 217°C |
| - Time (t_L) | 60 sec |
| Peak Temperature (T_P) | 260°C |
| Ramp-up rate | 3°C / sec max. |
| Ramp-down rate | 3~6°C / sec |

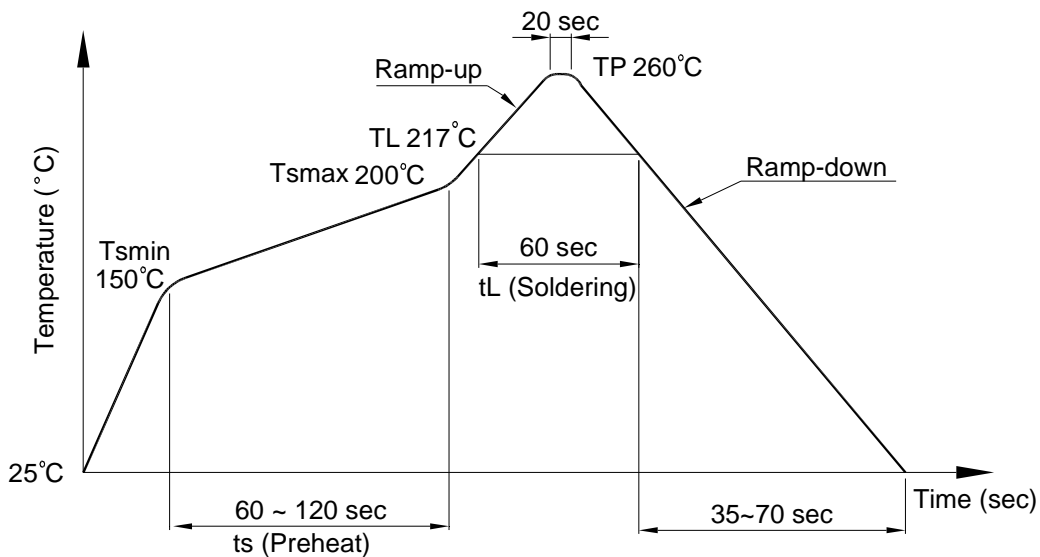

Photocoupler LTV-22X3 series LTV-32X3 series

6.2 Wave soldering (JEDEC22A111 compliant)


One time soldering is recommended within the condition of temperature.

Temperature: $260 \pm 0 / -5^{\circ}\text{C}$

Time: 10 sec.

Preheat temperature: 25 to 140°C

Preheat time: 30 to 80 sec.

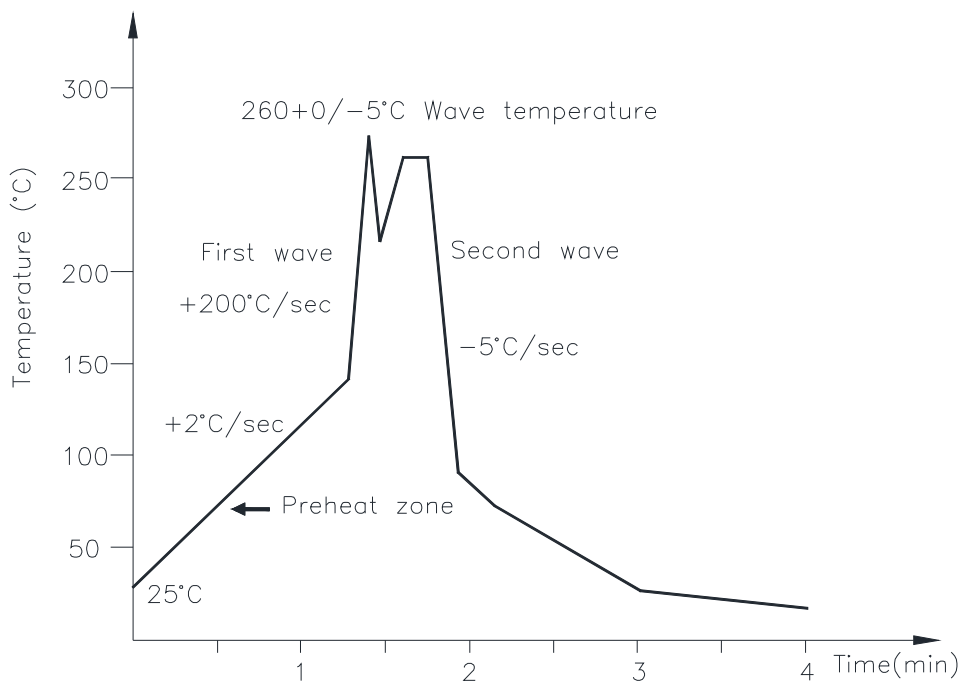



6.3 Hand soldering by soldering iron

Allow single lead soldering in every single process. One time soldering is recommended.

Temperature: $380 \pm 0 / -5^{\circ}\text{C}$

Time: 3 sec max.

7. NAMING RULE

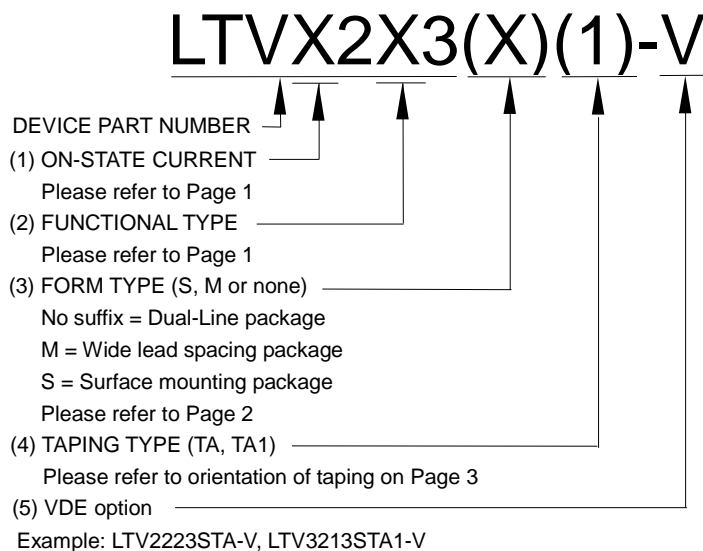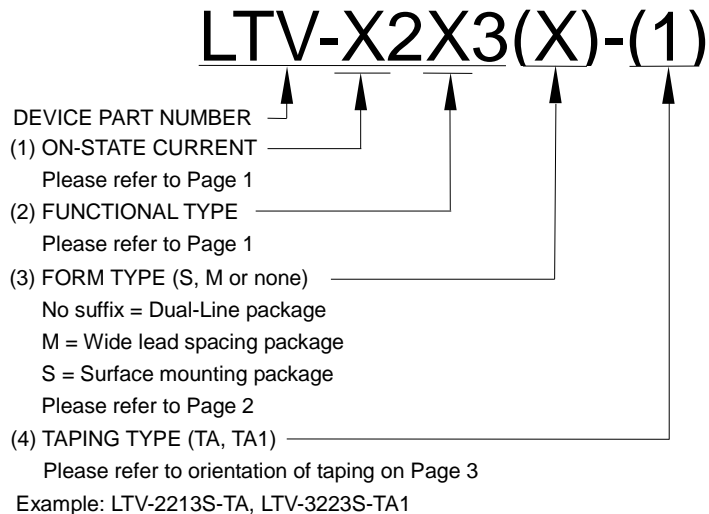

8. NOTES

1. LiteOn is continually improving the quality, reliability, function or design and LiteOn reserves the right to make changes without further notices.
2. The products shown in this publication are designed for the general use in electronic applications such as office automation equipment, communications devices, audio/visual equipment, electrical application and instrumentation.
3. For equipment/devices where high reliability or safety is required, such as space applications, nuclear power control equipment, medical equipment, etc, please contact our sales representatives.
4. When requiring a device for any "specific" application, please contact our sales in advice.
5. If there are any questions about the contents of this publication, please contact us at your convenience.
6. The contents described herein are subject to change without prior notice.
7. Immerge unit's body in solder paste is not recommended.

单击下面可查看定价，库存，交付和生命周期等信息

[>>Lite-On\(光宝\)](#)