


777 Series Axial Lead Fuse

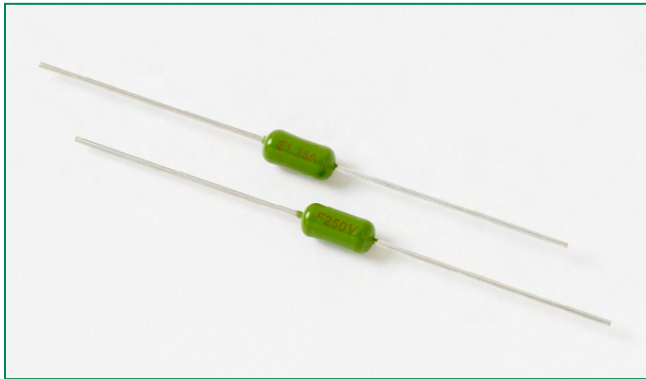

Description

The 777 Series is an axial lead 3.6mm x9mm fuse, designed for overcurrent protection in electronic appliance charger applications. The robust design enables the device to withstand up to 24 hits of 7.5kV ringwave surge and, its epoxy coating helps open safely on a direct short condition without producing soot, sparks, sounds. The enhanced electrical characteristics of the 777 Series make it ideal for use in wall-mounted chargers for smartphones and tablets. This series provides protection from catastrophic failures and safety hazard when experiencing direct shorting on an AC plug.

Agency Approvals

| Agency | Agency File Number | Ampere Range |
|--------|--------------------|--------------|
| | SU05024-13001 | 1.25A |
| | E10480 | 1.25A |
| | R 50267375 | 1.25A |
| | NBK111010-E10480 | 1.25A |
| | CQC14012107199 | 1.25A |

Features

- Enhanced interrupting rating
- Higher surge withstand capability
- Compact 3.6 x 9mm footprint saves board space
- Epoxy Coating

Applications

- Smartphone and tablet wall-mount chargers
- Power Supplies for consumer electronics

Additional Information

| | |
|--|--|
| | |
|--|--|


Electrical Characteristics for Series

| % of Ampere Rating | Opening Time |
|--------------------|--|
| 150% | 1 hours, Minimum |
| 275% | 10 milliseconds, Minimum 3 seconds, Maximum |


Electrical Characteristics by Item

| Amp Code | Voltage Rating | Interrupting Rating | Nominal Cold Resistance (Ohms) | Nominal Melting I ² t (A ² sec) | Agency Approvals | | | | |
|----------|----------------|---------------------|--------------------------------|---|------------------|---|---|---|---|
| | | | | | | | | | |
| 1.25 | 250 V | 50A @ 250 V AC | 0.070 | 2.70 | X | X | X | X | X |


Temperature Derating Curve

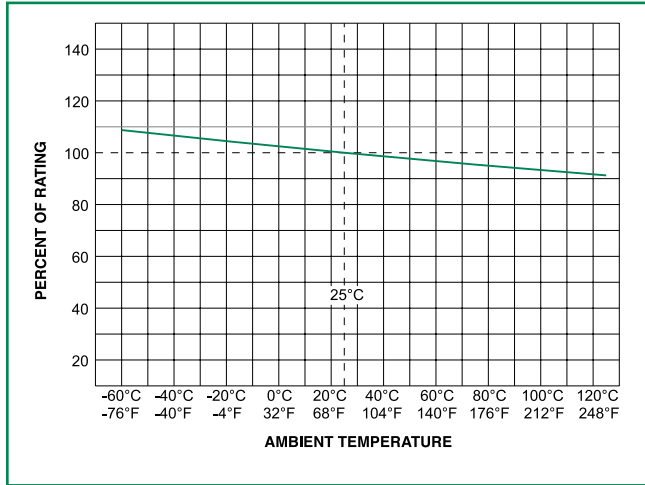

Average Time Current Curves

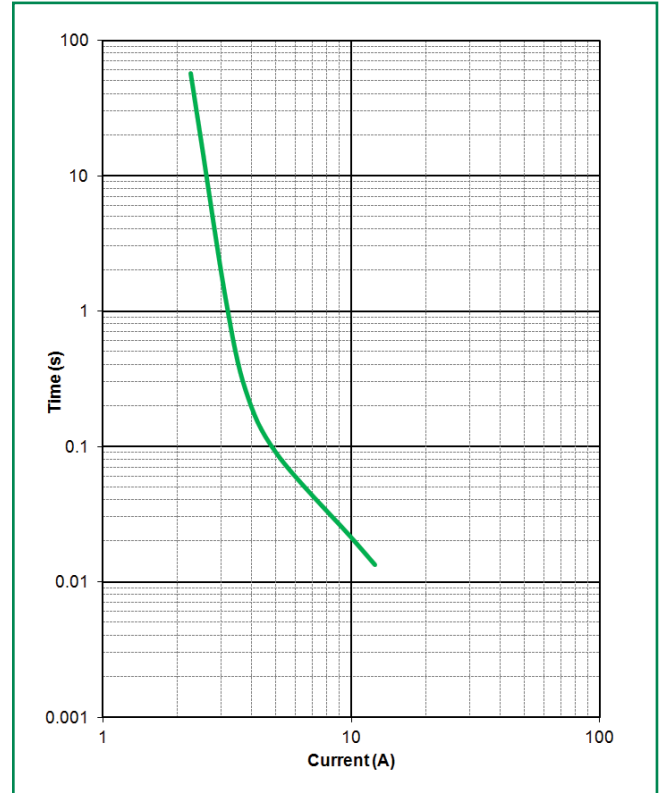

Soldering Parameters - Wave Soldering

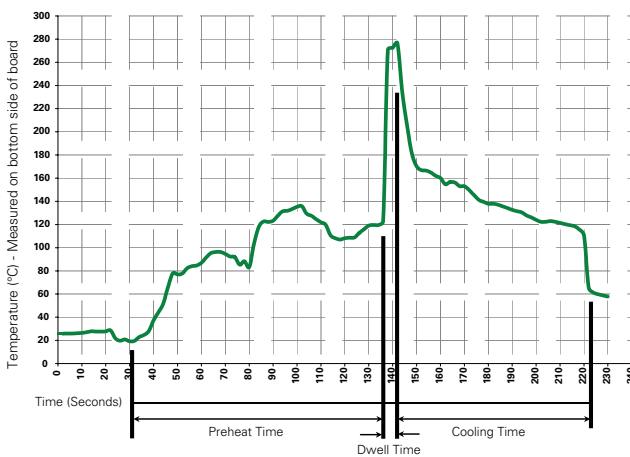

Recommended Process Parameters:

| Wave Parameter | Lead-Free Recommendation |
|--|-----------------------------------|
| Preheat: | |
| (Depends on Flux Activation Temperature) | (Typical Industry Recommendation) |
| Temperature Minimum: | 100° C |
| Temperature Maximum: | 150° C |
| Preheat Time: | 60-180 seconds |
| Solder Pot Temperature: | 260° C Maximum |
| Solder Dwell Time: | 2-5 seconds |

Recommended Hand-Solder Parameters:

Solder Iron Temperature: 350° C +/- 5° C
 Heating Time: 5 seconds max.


Note: These devices are not recommended for IR or Convection Reflow process.

Product Characteristics

| | |
|--------------------------|---|
| Materials | Encapsulated, Epoxy Coated body Pure-Tin-coated Copper Lead Wire |
| Terminal Strength | MIL-STD-202F Method 211A, Test Condition A |
| Solderability | Reference IEC 60127 Second Edition 2003-01 Annex A |
| Product Marking | Body: Brand Logo, Current Rating Characteristic "F" rated voltage |
| Packaging | Tape & Reel (1000 pcs/reel) |


| | |
|------------------------------|--|
| Operating Temperature | -55°C to 125°C |
| Thermal Shock | MIL-STD-202F, Method 107G Test Condition B3 (5 cycles -65°C to +125°C) |
| Vibration | MIL-STD-202F, Method 201A (10-55 Hz) |
| Humidity | MIL-STD-202, Method 106, High Humidity (90-98%RH), Heat (65°C) |
| Salt Spray | MIL-STD-202F, Method 101D, Test Condition B |

Dimensions

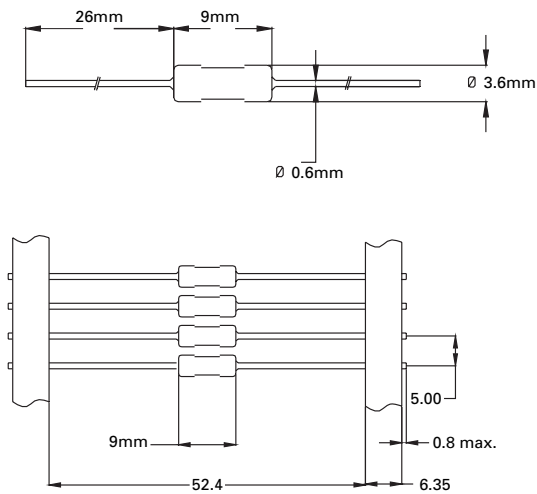

All dimensions in mm

Part Numbering System

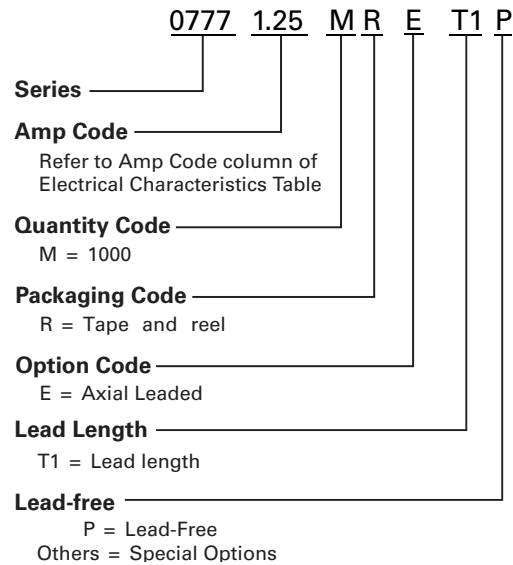

Packaging

| Packaging Option | Packaging Specification | Quantity | Packaging Code | Taping Width |
|------------------|-------------------------|----------|----------------|-------------------|
| Tape & Reel | EIA 296 | 1000 | MRET1 | T1 = 52mm (2.062) |

单击下面可查看定价，库存，交付和生命周期等信息

[>>Littelfuse\(美国力特\)](#)