


PART NO.	CURRENT RATING	BODY COLOR	RATED VOLTAGE
0293525.MXJ	25 A	LIGHT BROWN	32 V
0293530.MXJ	30 A	LIGHT GREEN	32 V

ELECTRICAL CHARACTERISTICS TEST

% OF RATED CURRENT	CLEARING TIME 25A - 30A	
	MIN.	MAX.
110 %	-	-
150 %	-	-
200 %	5 SEC.	70 SEC.
300 %	-	6 SEC.
400 %	-	3 SEC.

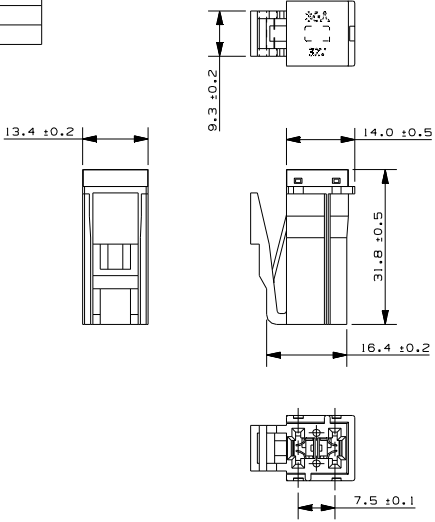


METRIC
ASSEMBLY

PART NO.	CURRENT RATING	BODY COLOR	RATED VOLTAGE
0293545.MXJ	45 A	RED	32 V
0293565.MXJ	65 A	BLACK	32 V
0293575.MXJ	75 A	GRAY	32 V

ELECTRICAL CHARACTERISTICS TEST

% OF RATED CURRENT	CLEARING TIME 45A - 75A	
	MIN.	MAX.
110 %	14,400 SEC.	-
150 %	100 SEC.	-
200 %	2 SEC.	60 SEC.
300 %	-	5 SEC.
400 %	-	2 SEC.

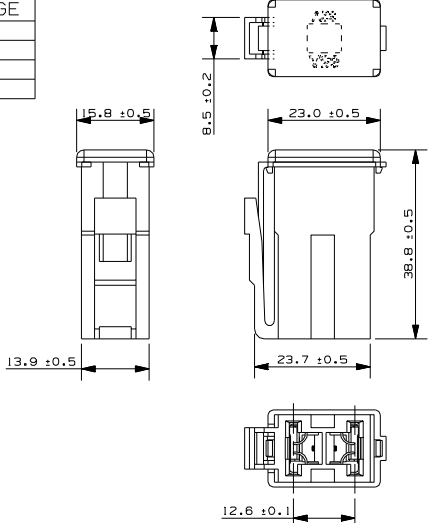

NO	COMPONENT NO	DESCRIPTION	QTY/M	U/M
BILL OF MATERIAL				
UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN BRACKETS [] ARE INCHES UNLESS OTHERWISE SPECIFIED, DIMENSIONS DO NOT INCLUDE PLATING.				
©	DENOTES CRITICAL CHARACTERISTICS.			
CPK	DENOTES CPK DIMENSIONS. -MINIMUM CPK VALUE			
(ST)	DENOTES A CHARACTERISTIC THAT PROVIDES AN INDICATION OF PROCESS PERFORMANCE. PROCEDURE FOR MEASUREMENT AND TRACKING TO BE DEFINED IN LITTELFUSE INSPECTION INSTRUCTIONS			
CP	DENOTES CP DIMENSIONS. -MINIMUM CP VALUE MUST BE WITHIN THE DIMENSIONAL LIMITATIONS SHOWN ON DRAWING AND INITIALLY LOCATED TO ALLOW FOR MAXIMUM TOOL LIFE			

COPIES TO		MATERIAL SPEC	
1	9	18	FINISH
2	10	19	SCALE 1:1
3	12	20	DATE 08/13/10
4	13	21	DATE
5	14	23	DATE
6	15	33	DATE
7	16	43	DATE
8	17	53	DATE

LTR	DATE	REVISION	CHK	APD
A	8/13/10	ERN NO. 500618 INITIAL RELEASE	RLD	

TOLERANCES UNLESS OTHERWISE SPECIFIED (REF. ISO 2768-PM)	0.5 - 1.0	1.0 - 3.0	3.0 - 5.0	5.0 - 30.0	30.0 - 120.0	120.0 - 400.0
DIMENSION	±0.10	±0.15	±0.20	±0.30	±0.40	±0.50
ANGLE	±0.10	±0.15	±0.20	±0.30	±0.40	±0.50
PROJECTION	±0.10	±0.15	±0.20	±0.30	±0.40	±0.50

TITLE	FUSE - PAL 293 ATP 32V
SL OWBLOW	
REVISION DRWG. NO.	0293500.MXJ
SERIES	A

单击下面可查看定价，库存，交付和生命周期等信息

[>>Littelfuse\(美国力特\)](#)