

USW2883 RTD Probe




Description

Littelfuse offers Polyimide probe assemblies suitable for a wide range of temperature sensing applications. If the dimensions and electrical characteristics on this product won't work for your requirements, please contact us for further assistance.

Features

- High Accuracy
- Small Size
- Un-Insulated Nickel Lead Wire
- 150°C Max Operating Temperature


Dimensions

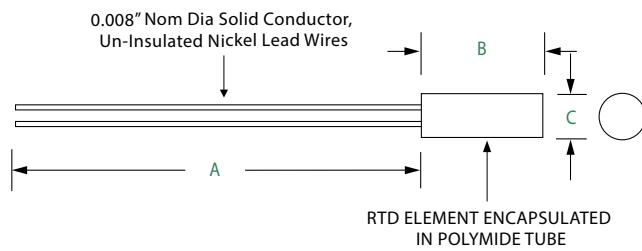

Dimensions shown in inches.

A	B	C
0.160" MIN	0.220" ± 0.025"	0.110" ± 0.010"

Part Numbering System



Note: Not all combinations of Part Number codes are available. Contact Littelfuse for details.

Specifications

Part Number	Resistance Ohms @0°C	Resistance Tol. ± % @ 0°C	DIN 43760 Class	TCR ppm/°C	Temp Rating °C
USW2883	500	0.12	B	3850	150 (Max)

Disclaimer Notice - Information furnished is believed to be accurate and reliable. However, users should independently evaluate the suitability of and test each product selected for their own applications. Littelfuse products are not designed for, and may not be used in, all applications. Read complete Disclaimer Notice at: www.littelfuse.com/disclaimer-electronics

单击下面可查看定价，库存，交付和生命周期等信息

[>>Littelfuse\(美国力特\)](#)