


0.008" NOMINAL DIAMETER LEAD WIRES

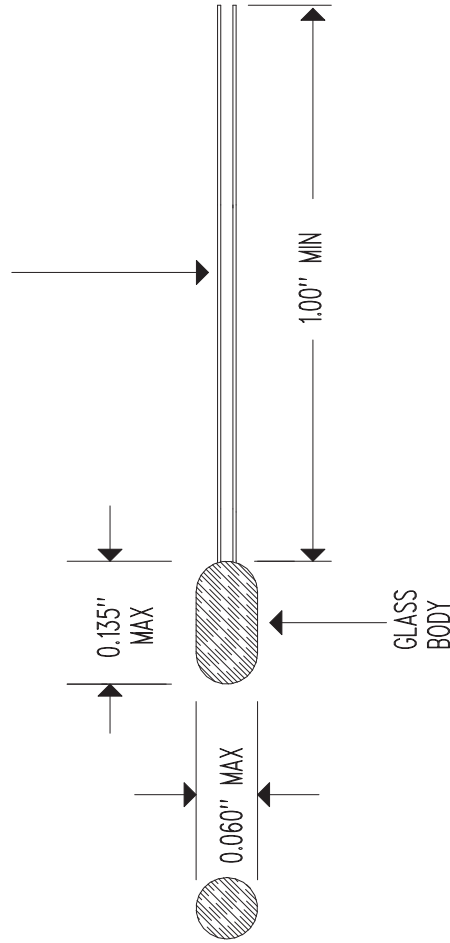

RESISTANCE @ +25°C = 10,000 Ω ± 1%
 RESISTANCE/TEMPERATURE CURVE = "G"
 BETA "β" (+25 TO +85°C) = 3,695°K NOMINAL
 DISSIPATION CONSTANT = 0.75 mW/°C NOMINAL (STILL AIR)
 THERMAL TIME CONSTANT = 0.35 SECONDS NOMINAL (STIRRED OIL)
 MAXIMUM TEMPERATURE RATING = +250°C

SEE MANUFACTURING SPECIFICATION (LAYER 1)

NONE	RELEASE TO PRODUCTION	01/11/12	DD
REV		REVISION RECORD	DATE APP

SCALE	NONE	U.S. SENSOR CORP. © COPYRIGHT 714-639-1000 www.usensor.com
DRAWN BY	DAN DANKERT	
DATE	01/11/12	NTC THERMISTOR
REV.	NONE	P/N GP103G4F
LAYER	0 OF 2	

单击下面可查看定价，库存，交付和生命周期等信息

[>>Littelfuse\(美国力特\)](#)