


GT Series Glass Coated Chip Thermistor



Dimensions

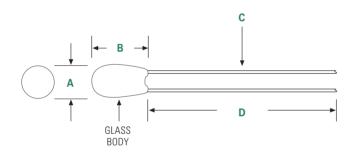

Dimensions shown in inches

| А | В | С | D |
|---------------|---------------|----------------------------------|--------------|
| 0.039″ Max | 0.089" Max | 0.0055" Nom Dia Lead Wires | 1.00″ Min |

Description

Littelfuse radial leaded glass coated chip thermistors feature excellent long-term stability and reliability as well as a fast thermal response time. They are especially suitable for temperature measurement and control where extreme temperatures, corrosive atmospheres and/or harsh environments are encountered. Their low cost and excellent reliability make them useful for applications ranging from HVAC/R to Industrial Controls to Consumer Appliances.


Options

 Non-standard resistance values and tolerances

Features

- High temperature capability to +300°C
- High stability

Part Numbering System

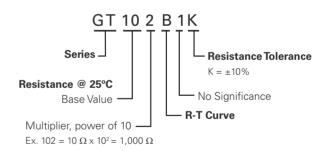

• Solderable lead wires

Fast thermal

response time

Note: Not all combinations of Part Number codes are available. Contact Littelfuse for details.



GT Series Glass Coated Chip Thermistor

Specifications

| Part Number | Resistance Ohms @25°C | *Resistance Tol. ± % @ 25°C | R-T Curve | Temperature Coefficient (% / °C) @ 25°C | Beta (K) 25-85°C | Dissipation Constant, Nominal (mW/°C) | Thermal Time Constant, Max Still Air (seconds) | Temperature Range (°C) |
|----------------|-----------------------------|-----------------------------------|--------------|--|---------------------|--|--|------------------------------|
| GT102B1K | 1000 | 10 | В | -3.3 | 3009 | 0.45 | 2.5 | -55 to +260 |
| GT202F1K | 2000 | 10 | F | -3.86 | 3499 | 0.45 | 2.5 | -55 to +260 |
| GT502F1K | 5000 | 10 | F | -3.86 | 3499 | 0.45 | 2.5 | -55 to +260 |
| GT103E1K | 10000 | 10 | E1 | -3.52 | 3435 | 0.45 | 2.5 | -55 to +260 |
| GT103J1K | 10000 | 10 | J | -4.4 | 3977 | 0.45 | 2.5 | -55 to +300 |
| GT303J1K | 30000 | 10 | J | -4.4 | 3977 | 0.45 | 2.5 | -55 to +260 |
| GT473N1K | 47000 | 10 | N1 | -4.5 | 4073 | 0.45 | 2.5 | -55 to +260 |
| GT503J1K | 50000 | 10 | J | -4.4 | 3977 | 0.45 | 2.5 | -55 to +260 |
| GT104L1K | 100000 | 10 | L1 | -4.52 | 4040 | 0.45 | 2.5 | -55 to +300 |
| GT105U1K | 1000000 | 10 | U1 | -4.52 | 4350 | 0.45 | 2.5 | -55 to +300 |

*Resistance tolerances of ± 1%, 2%, and 5% are available upon request

Disclaimer Notice - Information furnished is believed to be accurate and reliable. However, users should independently evaluate the suitability of and test each product selected for their own applications. Littelfuse products are not designed for, and may not be used in, all applications. Read complete Disclaimer Notice at: www.littelfuse.com/disclaimer-electronics

单击下面可查看定价,库存,交付和生命周期等信息

>>Littelfuse(美国力特)