


ULTRA MINIATURE REED RELAY

Single Pole, Form A
P.C.B. Mounting
Single-In-Line Style,
Transfer Molded Body.

SCHEMATIC (TOP VIEW)



CHARACTERISTICS

OPERATING TEMPERATURE -40 TO +85°C
STORAGE TEMPERATURE -40 TO +105°C
VIBRATION RESISTANCE, 10-2000 Hz 20 G'S MAXIMUM
SHOCK RESISTANCE, 11 ms, 1/2 SINE 50 G'S MAXIMUM



INSULATION RESISTANCE
 ACROSS OPEN CONTACTS 10¹⁰ Ω MINIMUM
 BETWEEN ISOLATED PINS 10¹⁰ Ω MINIMUM

VOLTAGE HOLD-OFF
 ACROSS OPEN CONTACTS 250 Vdc MINIMUM
 COIL TO CONTACTS 1500 Vac MINIMUM
 BETWEEN ISOLATED PINS --- Vac MINIMUM
 COIL TO E.S. --- Vac MINIMUM

CONTACT
 POWER, SWITCHING 10 WATTS MAXIMUM
 VOLTAGE, SWITCHING 200 Vdc MAXIMUM
 CURRENT, SWITCHING 0.5 AMPERES MAXIMUM
 CURRENT, CARRY 1.0 AMPERES MAXIMUM
 CONTACT RESISTANCE 0.200 Ω MAXIMUM
 OPERATE TIME, INCLUDING BOUNCE 1.0 ms MAXIMUM
 RELEASE TIME, DIODE SUPPRESSED 1.0 ms MAXIMUM

COIL CHARACTERISTICS AT 25°C
 NOMINAL COIL VOLTAGE 12 Vdc
 COIL RESISTANCE ±10% 2000 Ω
 MUST OPERATE VOLTAGE 8.0 Vdc
 MUST RELEASE VOLTAGE 1.0 Vdc
 MAXIMUM COIL VOLTAGE 44 Vdc

DIMENSIONS

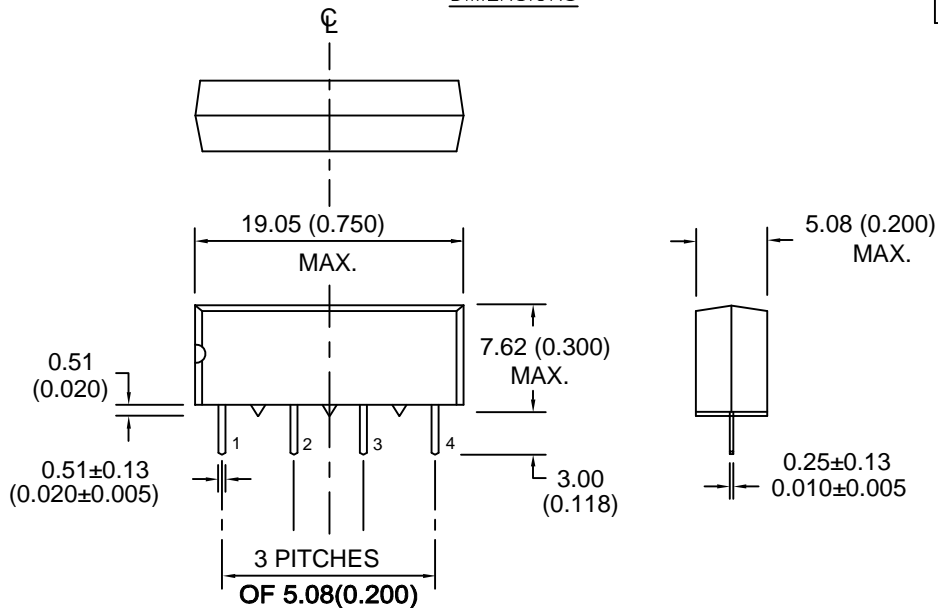

ALL DIMENSIONS ±0.38 (0.015) UNLESS OTHERWISE STATED

DATE CODE: 4 DIGITS

XXXX

FIRST TWO ARE: THE TWO LAST DIGITS OF THE YEAR
 SECOND TWO ARE: THE TWO DIGITS OF THE WEEK OF THE CURRENT YEAR.

ORIGINAL DCR NO. L0293	
DRAWN BY: CRJ	DATE: 3/31/04
APP'D BY: CRJ	DATE: 4/1/04

HAMLIN	PROPRIETARY NOTE: THE INFORMATION ON THIS DRAWING IS THE CONFIDENTIAL PROPERTY OF HAMLIN. THIS DRAWING MUST NOT BE MADE PUBLIC OR COPIED UNLESS AUTHORIZED IN WRITING BY HAMLIN. THIS DRAWING IS SUBJECT TO RETURN UPON DEMAND.
	DESCRIPTION OF REVISION: NEW DRAWING

SHEET 1 of 1	DCR NO. L0293	REV. AA
DRAWN BY:	DATE:	
APP'D BY:	DATE:	

单击下面可查看定价，库存，交付和生命周期等信息

[>>Littelfuse\(美国力特\)](#)