EUSEBLOCKS AND CEIPS



FOR 5 x 20 mm FUSES

5 x 20 mm Low Amperage P.C. Board Type 51 66

APPROVALS: Recognized under the Components Program of Underwriters Laboratories and Certified by CSA.

SPECIFICATIONS:

Electrical: Rated for 3.15 amperes at 250 volts.


Dielectric Strength: 3000 volts minimum. Terminals: Tin plated copper alloy. Base: Gray thermoplastic with UL 94V0

flammability rating.

Ambient Temperature: 60 °C maximum.

ORDERING INFORMATION:

Catalog Number	Number of Poles
354 252	1

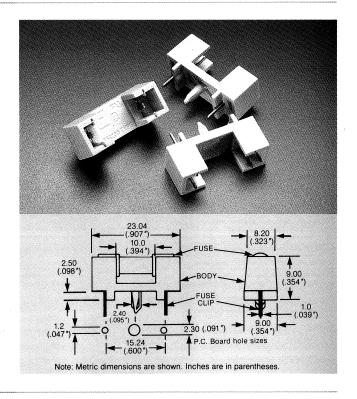

5 x 20 mm P.C. Board Type

SPECIFICATIONS:


Electrical: Rated for currents up to 6.3 amperes, 250 volts.

Clip/Terminals: Tin plated spring brass. Ear type. Base: Phenolic laminate. UL 94V0 flammability rating

Ambient Temperature: 120°C maximum.

ORDERING INFORMATION:

Catalog Number	Number of Poles
520 002	1

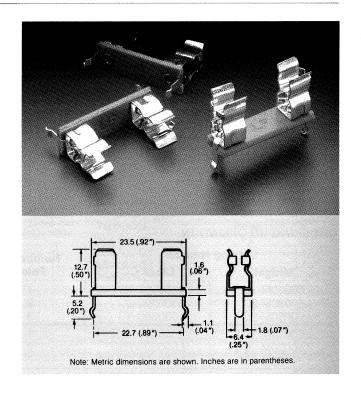

单击下面可查看定价,库存,交付和生命周期等信息

>>Littelfuse(美国力特)