


MATERIAL BASE: NYLON 6/6 W/15% GLASS FIBRE (BLACK)  
 ARM: 94V-0 POLYESTER W/30% GLASS FIBRE (BLACK)  
 CONNECTOR: 94V-0 POLYESTER W/30% GLASS FIBRE (BLACK)

OPERATING PARAMETERS  
 1.) OFF POINT: LESS THAN 15° ROTATION FROM REST POSITION  
 2.) ON POINT: GREATER THAN 2° ROTATION FROM REST POSITION


CONTACT RATINGS  
 CONTACT CAPACITY= 10 WATTS MAX.  
 SWITCHING VOLTAGE= 200 Vdc MAX.  
 SWITCHING CURRENT= .500 Adc MAX.  
 CONTACT RESISTANCE= .200 OHM MAX.

CONNECTOR PINS .025 IN <sup>2</sup>, GOLD PLATED PHOSPHOR BRONZE

ALL DIMENSIONS IN mm  
 TOLERANCES: ±0,25 UNLESS OTHERWISE SPECIFIED

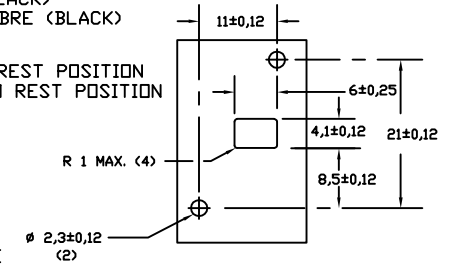

MATERIAL TO BE 1,6±0,21 THICK  
 SWITCH MOUNTING HOLE PATTERN

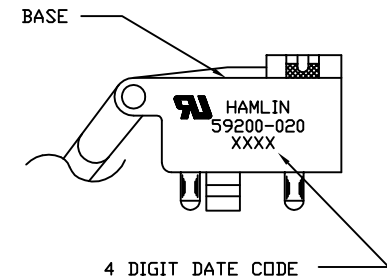

SWITCH ASSEMBLY							<b>HAMLIN</b>		DCR NO. 4035
AB	ADD PACKING -2 SHEET	B0049	CRJ	5/13/03	CRJ	5/13/03	DRAWN BY: KU	DATE: 9/18/89	DRAWING NO. D10-59200-020
REV.	DESCRIPTION OF REVISION	DCR NO.	BY	DATE	APP.	DATE	APP'D: BB	DATE: 9/28/89	SHEET 1 OF 1

单击下面可查看定价，库存，交付和生命周期等信息

[>>Littelfuse\(美国力特\)](#)