

MA Varistor Series



Description

The MA Series of transient surge suppressors are axial lead Metal Oxide Varistors (MOVs) for use in a wide variety of board level industrial and commercial electronic equipment. They are intended to protect components and signal/data lines from low energy transients where the small axial lead package is required.

The MA Series is offered with standard ('S' suffix) or tightened ('B' suffix) clamping voltage.

See MA Series Device Ratings and Specifications Table for part number and brand information.

Agency Approvals

Agency	Agency File Number
	None

Additional Information



Datasheet



Resources



Samples

Features

- Lead-free, Halogen-Free and RoHS compliant.
- 3mm diameter disc size
- Small axial lead package
- Wide operating voltage range:
 $V_{M(AC)RMS}$ 9V to 264V
 $V_{M(DC)}$ 13V to 365V
- Available in tape and reel or bulk packaging
- No derating up to 85°C ambient
- New black epoxy offers improved performance for high temperature Lead-free wave soldering process.

Absolute Maximum Ratings

• For ratings of individual members of a series, see Device Ratings and Specifications chart

Continuous	MA Series	Units
Steady State Applied Voltage:		
AC Voltage Range ($V_{M(AC)RMS}$)	9 to 264	V
DC Voltage Range ($V_{M(DC)}$)	13 to 365	V
Transient:		
Peak Pulse Current (I_{TM})		
For 8/20 μ s Current Wave(See Figure 2)	40 to 100	A
Single-Pulse Energy Range		
For 2ms Current Square Wave (W_{TM})	0.06 to 1.7	J
Operating Ambient Temperature Range (T_A)	-55 to +85	°C
Storage Temperature Range (T_{STG})	-55 to +125	°C
Temperature Coefficient (αV) of Clamping Voltage (V_C) at Specified Test Current	<0.01	%/°C
Hi-Pot Encapsulation (COATING Isolation Voltage Capability) Dielectric must withstand indicated DC voltage for one minute per MIL-STD 202, Method 301)	1000	V
COATING Insulation Resistance	1000	M Ω

CAUTION: Stresses above those listed in "Absolute Maximum Ratings" may cause permanent damage to the device. This is a stress only rating and operation of the device at these or any other conditions above those indicated in the operational sections of this specification is not implied.

MA Series Ratings & Specifications

Part Number	Brand (mm)	Maximum Rating (85°C)				Specifications (25°C)				
		Continuous		Transient		Varistor Voltage at 1mA DC Test Current			Max Clamping Volt V_C at 2.0A (8/20 μ s)	Typical Capacitance
		V_{RMS}	V_{DC}	Energy (10/1000 μ s)	Peak Current (8/20 μ s)					
		$V_{M(AC)}$	$V_{M(DC)}$	W_{TM}	I_{TM}	Min	$V_{N(DC)}$	Max	V_C	$f = 1\text{MHz}$
		(V)	(V)	(J)	(A)	(V)	(V)	(V)	(A)	(pF)
V18MA1A V18MA1B V18MA1S	18A 18B 18S	9 10 10	13 14 14	0.06 0.07 0.06	40 40 40	14 15 15	18 18 18	23 21 21	49 44 49	550 550 550
V22MA1A V22MA1B V22MA1S	22A 22B 22S	10 14 14	15 18 18	0.09 0.10 0.09	40 40 40	16 19 19	22 22 22	28 26 26	55 51 55	410 410 410
V27MA1A V27MA1B V27MA1S	27A 27B 27S	13 17 17	19 22 22	0.10 0.11 0.10	40 40 40	21 24 24	27 27 27	34 31 31	67 59 67	370 370 370
V33MA1A V33MA1B V33MA1S	33A 33B 33S	18 20 20	23 26 26	0.13 0.15 0.14	40 40 40	26 29.5 29.5	33 33 33	40 36.5 36.5	73 67 73	300 300 300
V39MA2A V39MA2B V39MA2S	39A 39B 39S	22 25 25	28 31 31	0.16 0.18 0.17	40 40 40	31 35 35	39 39 39	47 43 43	86 79 86	250 250 250
V47MA2A V47MA2B V47MA2S	47A 47B 47S	27 30 30	34 38 38	0.19 0.21 0.19	40 40 40	37 42 42	47 47 47	57 52 52	99 90 99	210 210 210
V56MA2A V56MA2B V56MA2S	56A 56B 56S	32 35 35	40 45 45	0.23 0.25 0.23	40 40 40	44 50 50	56 56 56	68 62 62	117 108 117	180 180 180
V68MA3A V68MA3B V68MA3S	68A 68B 68S	38 40 40	48 56 56	0.26 0.30 0.27	40 40 40	54 61 61	68 68 68	82 75 75	138 127 138	150 150 150
V82MA3A V82MA3B V82MA3S	82A 82B 82S	45 50 50	60 66 66	0.33 0.37 0.34	40 40 40	65 73 73	82 82 82	99 91 91	163 150 163	120 120 120
V100MA4A V100MA4B V100MA4S	100 101 102	57 60 60	72 81 81	0.40 0.45 0.42	40 40 40	80 90 90	100 100 100	120 110 110	200 185 200	100 100 100
V120MA1A V120MA2B V120MA2S	120 121 122	72 75 75	97 101 101	0.40 0.50 0.46	100 100 100	102 108 108	120 120 120	138 132 132	220 205 220	40 40 40
V150MA1A V150MA2B	150 151	88 92	121 127	0.50 0.60	100 100	127 135	150 150	173 165	255 240	32 32
V180MA1A V180MA3B	180 181	105 110	144 152	0.60 0.70	100 100	153 162	180 180	207 198	310 290	27 27
V220MA2A V220MA4B	220 221	132 138	181 191	0.80 0.90	100 100	187 198	220 220	253 242	380 360	21 21
V270MA2A V270MA4B	270 271	163 171	224 235	0.90 1.00	100 100	229 243	270 270	311 297	460 440	17 17
V330MA2A V330MA5B	330 331	188 200	257 274	1.00 1.10	100 100	280 297	330 330	380 363	570 540	14 14
V390MA3A V390MA6B	390 391	234 242	322 334	1.20 1.30	100 100	331 351	390 390	449 429	670 640	12 12
V430MA3A V430MA7B	430 431	253 264	349 365	1.50 1.70	100 100	365 387	430 430	495 473	740 700	11 11

NOTE: Average power dissipation of transients not to exceed 200mW.

Power Dissipation Ratings

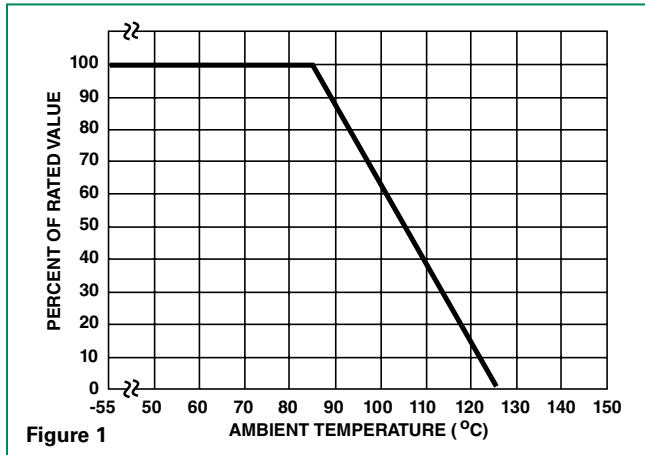


Figure 1

Should transients occur in rapid succession, the average power dissipation required is simply the energy (watt-seconds) per pulse times the number of pulses per second. The power so developed must be within the specifications shown on the Device Ratings and Specifications table for the specific device. Furthermore, the operating values need to be derated at high temperatures as shown above. Because varistors can only dissipate a relatively small amount of average power they are, therefore, not suitable for repetitive applications that involve substantial amounts of average power dissipation.

Peak Pulse Current Test Waveform

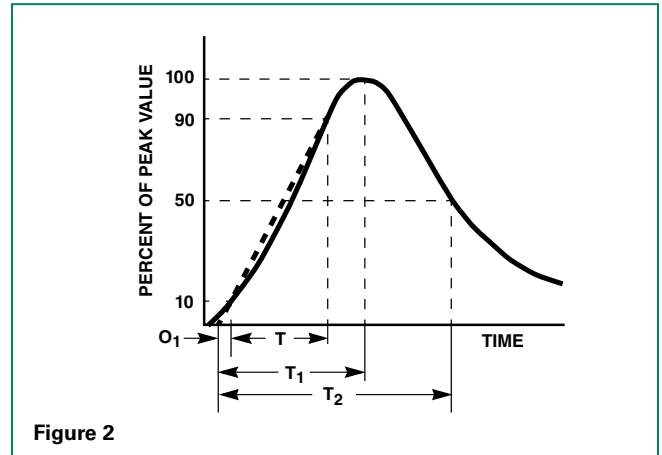


Figure 2

- O_1 = Virtual Origin of Wave
- T = Time from 10% to 90% of Peak
- T_1 = Rise Time = $1.25 \times T$
- T_2 = Decay Time

Example - For an $8/20 \mu\text{s}$ Current Waveform:

- $8\mu\text{s} = T_1 = \text{Rise Time}$
- $20\mu\text{s} = T_2 = \text{Decay Time}$

Repetitive Surge Capability

V18MA - V100MA

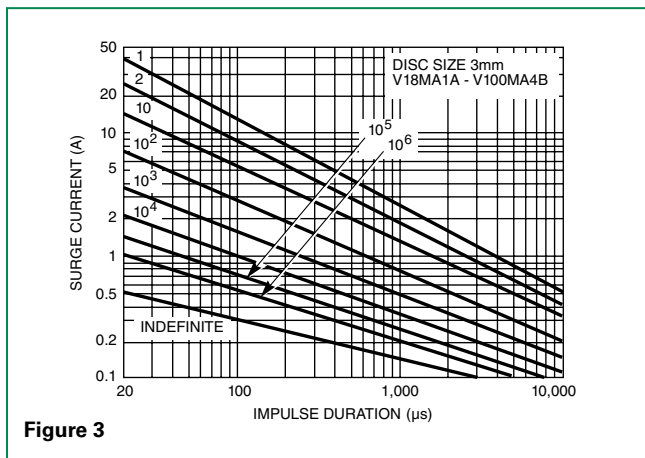


Figure 3

V120MA1A/S - V430MA3A

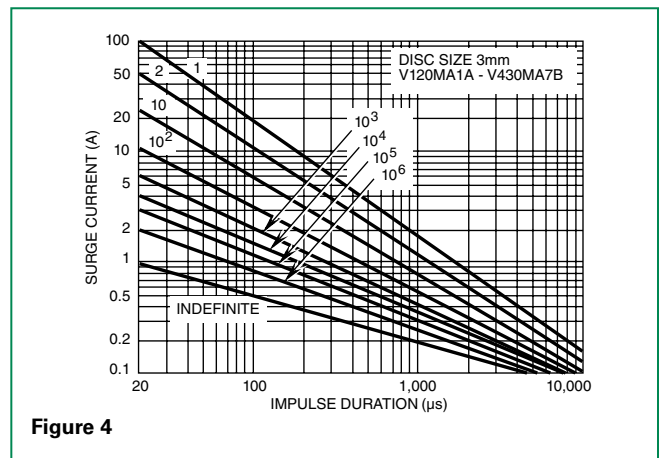


Figure 4

NOTE: If pulse ratings are exceeded, a shift of V_{NIDC} (at specified current) of more than +/-10% could result. This type of shift, which normally results in a decrease of V_{NIDC} , may result in the device not meeting the original published specifications, but it does not prevent the device from continuing to function, and to provide ample protection.

Maximum Clamping Voltage

V18MA1A/S - V100MA4A/S

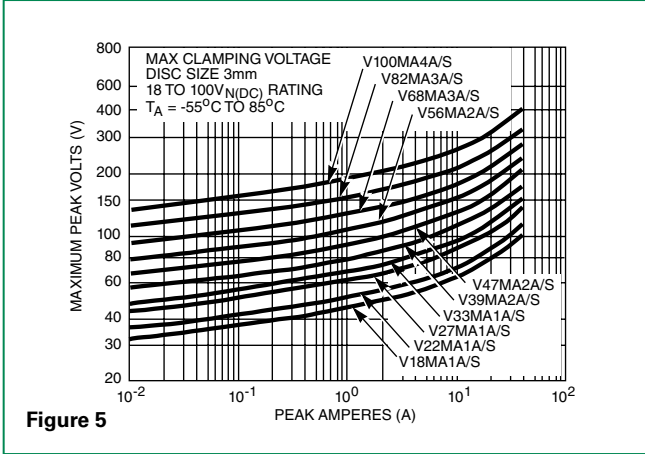


Figure 5

V18MA1B - V100MA4B

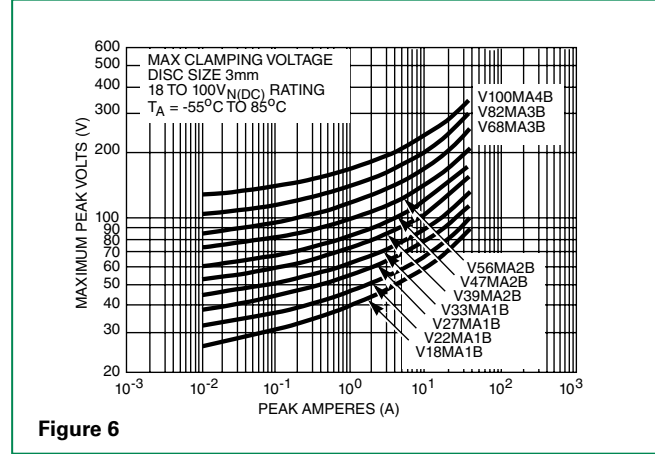


Figure 6

V120MA1A/S - V430MA3A

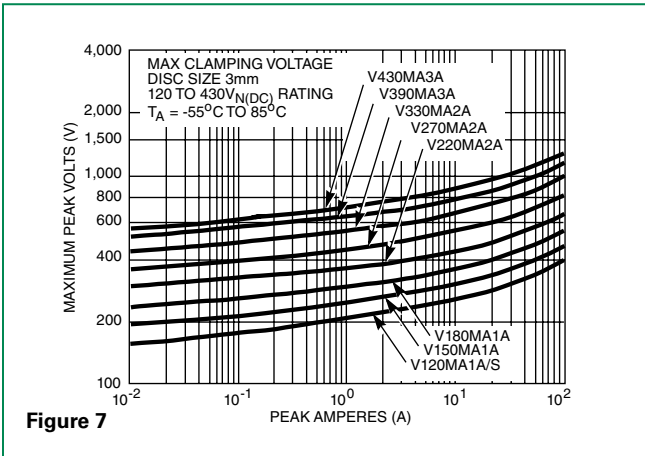


Figure 7

V120MA2B - V430MA7B

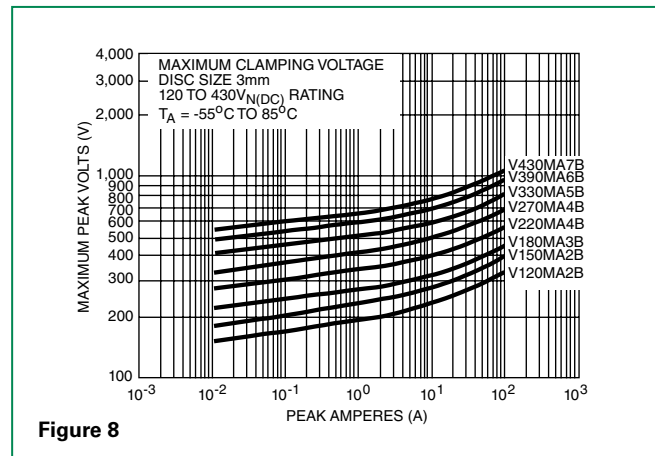


Figure 8

Wave Solder Profile

Non Lead-free Profile

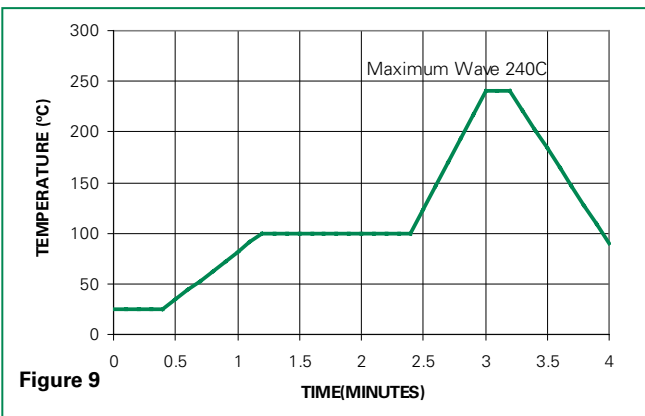


Figure 9

Lead-free Profile


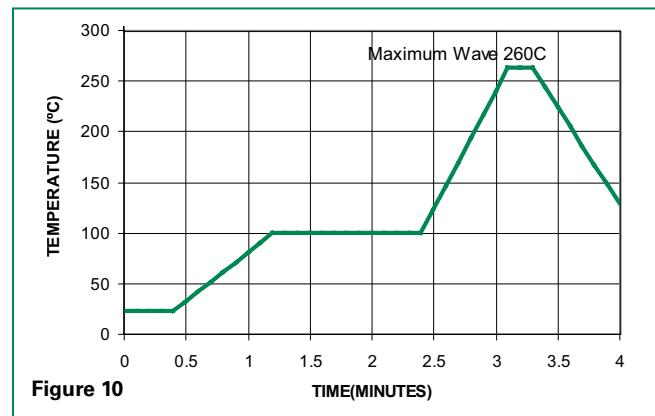


Figure 10


Product Dimensions

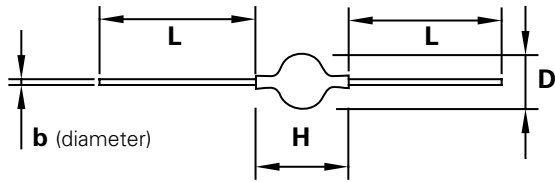

Symbol	Inches		Millimeters	
	Min	Max	Min	Max
Øb	0.024	0.026	0.61	0.66
ØD	0.118	0.177	3.0	4.5
H	0.177	0.276	4.5	7.0
L	1.740	1.220	27.3	31.0

Typical Weight = 0.5g

Tape and Reel Dimensions

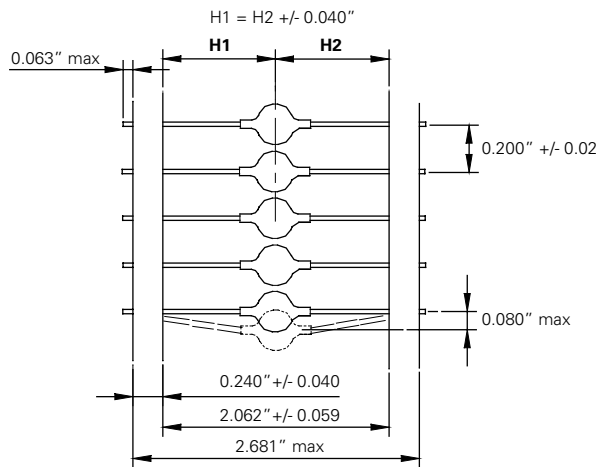

Conforms to EIA Standard RS-296-E


Physical Specifications

Lead Material	Tin-plated Copper clad steel
Soldering Characteristics	Solderability per MIL-STD-202, Method 208
Insulating Material	Cured, flame retardant epoxy polymer meets UL94V-0 requirements
Device Labeling	Marked with LF, voltage and date code

Environmental Specifications

Operating/Storage Temperature	-40°C to +85°C
Passive Aging	+85°C, 1000 hours +/-10% typical voltage change
Humidity Aging	+85°C, 85% RH, 1000 hours +/-10% typical voltage change
Thermal Shock	+85°C to -40°C 5 times +/-10% typical voltage change
Solvent Resistance	MIL-STD-202, Method 215
Moisture Sensitivity	Level 1, J-STD-020

Part Numbering System

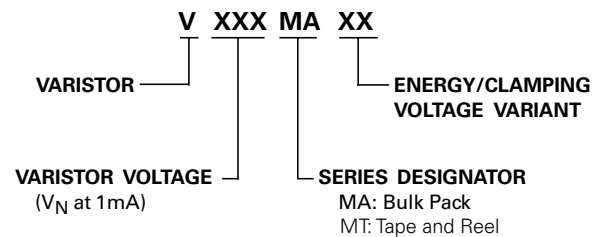

Disclaimer Notice - Information furnished is believed to be accurate and reliable. However, users should independently evaluate the suitability of and test each product selected for their own applications. Littelfuse products are not designed for, and may not be used in, all applications. Read complete Disclaimer Notice at www.littelfuse.com/disclaimer-electronics.

单击下面可查看定价，库存，交付和生命周期等信息

[>>Littelfuse\(美国力特\)](#)