
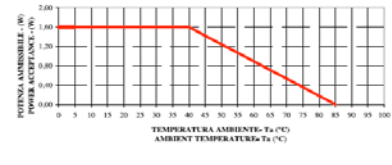
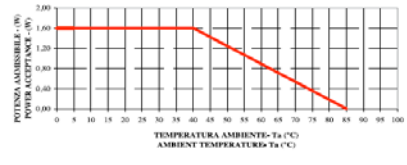
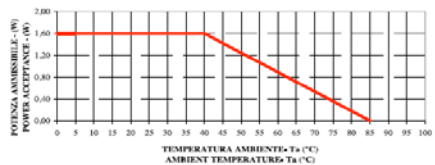
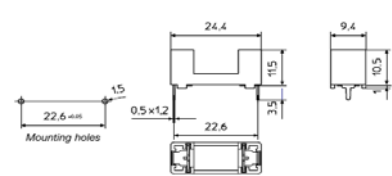
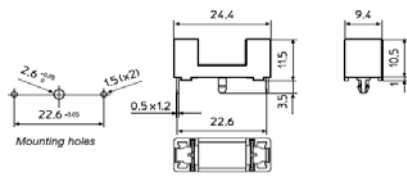


Project: PTF Series
 Status: Production
 Date: August 9th 2013
 Rev 1

PTF Series				
Characteristic	OPTF0075P / OPTF0075PXB	OPTF0077P	OPTF0078P	
Fuse Link	5X20	5X20	5X20	
Mounting	PCB	PCB	PCB	
Rated Current	6.3 Amp.	6.3 Amp.	6.3 Amp.	
Rated Voltage	250 VAC	250 VAC	250 VAC	
Rated Power Acceptance	1.6 W	1.6 W	1.6 W	
Housing	PA UL-94 V0	PA UL-94 V0	PA UL-94 V0	
Admissible Air Temperature	-30° C to 85° C	-30° C to 85° C	-30° C to 85° C	
Schoksafe Category	PC1	PC1	PC1	
Degree of Protection	IP00	IP00	IP00	
Contact Resistance	< 5.0 mΩ	< 5.0 mΩ	< 5.0 mΩ	
VDE Rated Current	6.3 Amp.	6.3 Amp.	6.3 Amp.	
VDE Rated Voltage	250 VAC	250 VAC	250 VAC	
VDE Rated Power Acceptance	1.6 W	1.6 W	1.6 W	
UR Rated Current	10 Amp.	10 Amp.	10 Amp.	
UR Rated Voltage	250 VDC	250 VDC	250 VDC	
UR Rated Power Acceptance	-	-	-	

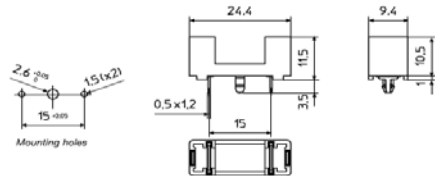

单击下面可查看定价，库存，交付和生命周期等信息

[>>Littelfuse\(美国力特\)](#)