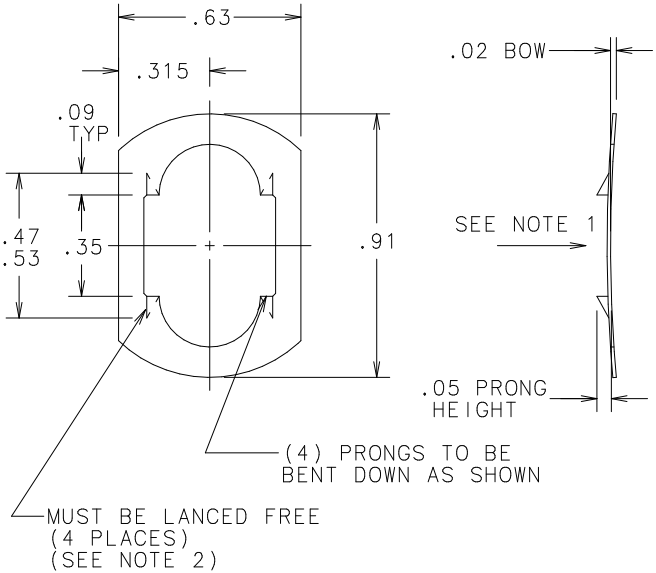


NOTES:
1. I.D. TO BE .455 "GO"/.471 "NO GO" WHEN MEASURED IN DIRECTION SHOWN.
2. TO INSURE LANCE IS CUT FREE, PART TO BE BENT 90° AT EACH LANCE.

VENDOR: ASQUARED
P/N: PO-659460-1

| NO | COMPONENT NO | DESCRIPTION | QTY/M | U/M |
|---|---|---|---|---|

**BILL OF MATERIAL**

UNLESS OTHERWISE SPECIFIED, DIMENSIONS DO NOT INCLUDE PLATING.

| | |
|---|---|
| O | DENOTES CRITICAL CHARACTERISTICS. |
| CPK | DENOTES CPK DIMENSIONS,-MINIMUM CPK VALUE |
| ⟨ST⟩ | DENOTES A CHARACTERISTIC THAT PROVIDES AN INDICATION OF PROCESS PERFORMANCE. PROCEDURE FOR MEASUREMENT AND TRACKING TO BE DEFINED IN LITTELFUSE INSPECTION INSTRUCTIONS. |
| CP | DENOTES CP DIMENSIONS,-MINIMUM CP VALUE MUST BE WITHIN THE DIMENSIONAL LIMITATIONS SHOWN ON DRAWING AND INITIALLY LOCATED TO ALLOW FOR MAXIMUM TOOL LIFE. |

| LTR | REVISION |
|---|---|
| G | 39107C- REVISED & REDRAWN ON NEW FORMAT 4/21/98 JMB |

COPIES TO

| | | |
|---|---|---|
| 1 | 9 | 18 |
| 2 | 10 | 19 |
| 3 | 12 | 20 |
| 4 | 13 | 21 |
| 5 | 14 | 23 |
| 6 | 15 | 33 |
| 7 | 16 | 43 |
| 8 | 17 | 53 |

MATL SPEC: AISI C-1050 ANNEALED .625 W. x .012 THK HEAT TREAT TO RC 46-50

FINISH: BLACK OXIDE

| DRW | DATE | SCALE |
|---|---|---|
| JMB | 3/2/98 | 2=1 |
| CHK | DATE | SUPER DRW |
| APPD | DATE | RAW STK WT LBS/M |

TOLERANCE UNLESS OTHERWISE SPECIFIED
TWO PLACE DEC ±.01 FRACTION ±
THREE PLACE DEC ±.005 ANGULAR ±1°

TITLE: PUSH-ON ROUND

littelfuse®
DES PLAINES, ILLINOIS 60016

REVISION: G
DRWG. NO. -903-114

UNCONTROLLED DOCUMENT

CAD GENERATED DRAWING - NO PENCIL CHANGES ALLOWED

Downloaded From Oneyac.com

单击下面可查看定价，库存，交付和生命周期等信息

>>Littelfuse(美国力特)

Downloaded From Oneyac.com