


PART NUMBER	CURRENT RATING (A)	BODY COLOR	RATED VOLTAGE
0295020.MXJ	20	LIGHT BLUE	32V
0295030.MXJ	30	PINK	
0295040.MXJ	40	GREEN	
0295050.MXJ	50	RED	
0295060.MXJ	60	YELLOW	
0295070.MXJ	70	BROWN	
0295080.MXJ	80	BLACK	
0295100.MXJ	100	BLUE	
0295120.MXJ	120	WHITE	
0295140.MXJ	140	REDDISH BROWN	

% OF RATED CURRENT	OPENING TIME	
	MIN	MAX
110%	14,400 SEC.	-
200%	5 SEC.	100 SEC.
350%	0.2 SEC.	7 SEC.
600%	0.04 SEC.	1 SEC.

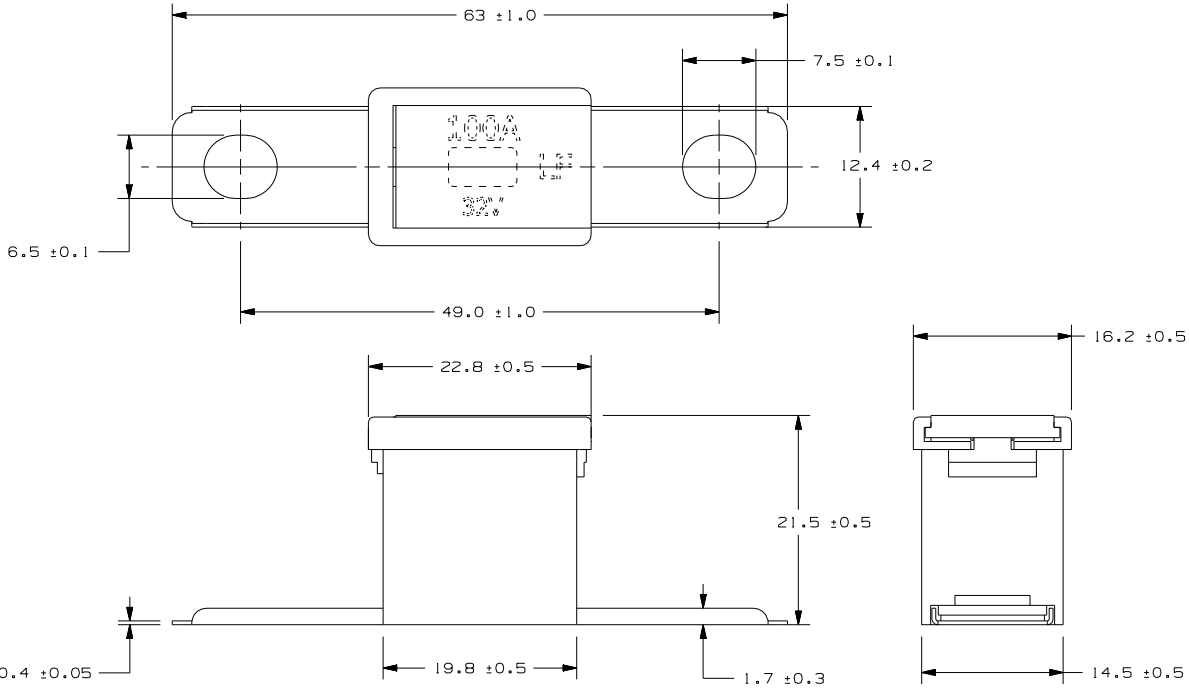

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN BRACKETS [] ARE INCHES UNLESS OTHERWISE SPECIFIED. DIMENSIONS DO NOT INCLUDE PLATING.

© DENOTES CRITICAL CHARACTERISTICS.
 CPK DENOTES CPK DIMENSIONS. -MINIMUM CPK VALUE
 DENOTES A CHARACTERISTIC THAT PROVIDES AN INDICATION OF PROCESS PERFORMANCE. PROCEDURE FOR MEASUREMENT AND TRACKING TO BE DEFINED IN LITTELFUSE INSPECTION INSTRUCTIONS
 CP DENOTES CP DIMENSIONS. -MINIMUM CP VALUE MUST BE WITHIN THE DIMENSIONAL LIMITATIONS SHOWN ON DRAWING AND INITIALLY LOCATED TO ALLOW FOR MAXIMUM TOOL LIFE

METRIC

NO		COMPONENT NO		DESCRIPTION		QTY/M		U/M	
BILL OF MATERIAL									
MATERIAL SPEC									
COPIES TO	1	9	18						
	2	10	19						
	3	12	20						
	4	13	21	DRW	GMB	DATE	03/29/10	SCALE	2:1
	5	14	23	CHK		DATE		SUPER DR	
	6	15	33			DATE		FINISH GOOD WT	
	7	16	43	APPD		DATE		GRAMS/PIECE	
	8	17	53						
TOLERANCES UNLESS OTHERWISE SPECIFIED (REF. ISO 2768-MK)									
DIMENSION	0.5 - 30	30 - 50	50 - 120	120 - 400					
TOLERANCE	±0.1	±0.1	±0.2	±0.3					
3RD ANGLE PROJECTION									
TITLE	FUSE - PAL 295 ATI 32V								
REVISION	SLOW BLOW								
OUTLINE	OL-0295000.MXJ								
DES PLAINES, ILLINOIS 60016									

LTR	DATE	REVISION	CHK	APD
A	03/29/10	SA201-RELEASE GMB		
B	05/25/10	SA296-RELEASE 30A THROUGH 100A GMB		
C	06/07/10	SA314-RELEASE 120A GMB		

单击下面可查看定价，库存，交付和生命周期等信息

[>>Littelfuse\(美国力特\)](#)