LTR	DATE	REVISION	CHK	APD
B	6/19/00	80687C - REVISE & REDRAWN ON NEW FORMAT JMB		
C	2/06/08	000342EC-ADD 057883 COLOR CONCENTRATE TO BOM, CHG. NYLON 6/6 FROM 057333 TO 057348 DHM		

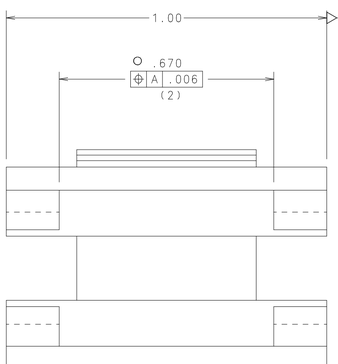

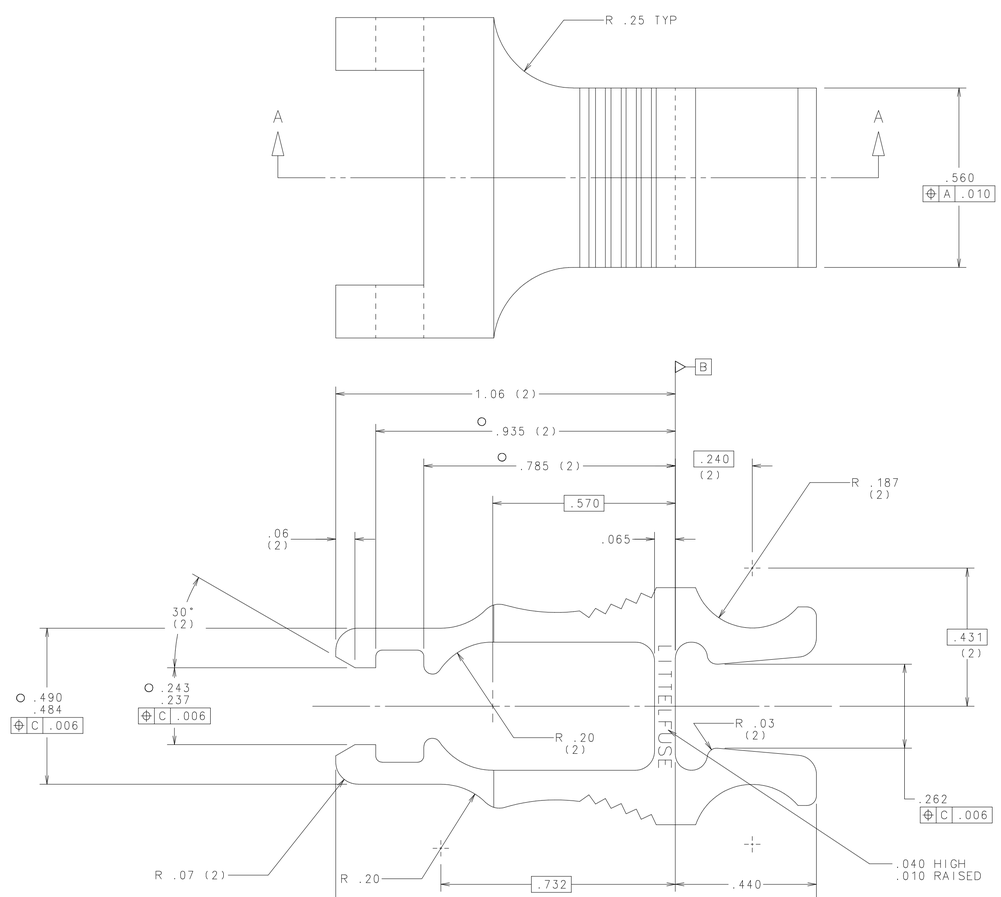

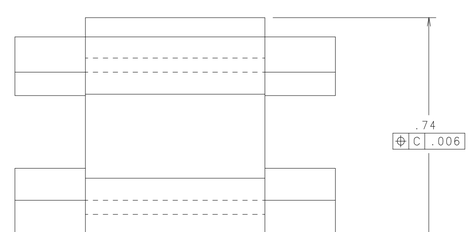

NOTES:

1. THIS FUSE PULLER IS TO MATE WITH MAXIFUSE ONLY. (L/F 0299000 SERIES)
2. UNLESS OTHERWISE SPECIFIED: ALL RADII TO BE .020 MAX.
3. 50% MAXIMUM ALLOWABLE REGRIND.

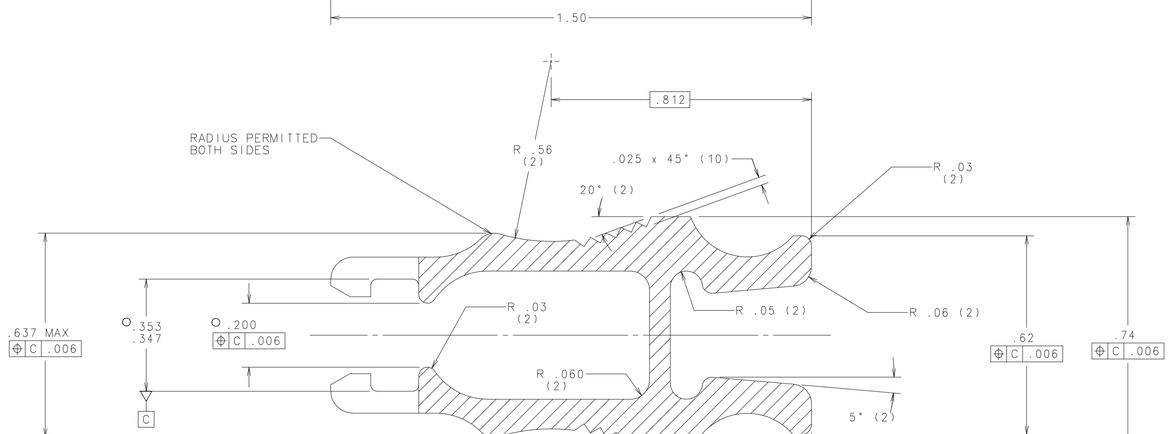

SECT. A-A

PACKAGING NOTES:
PLACE 2000 PIECES IN BAG 890-750. CLOSE WITH WIRE TIE 890-471 AND PLACE IN BOX 580143. CLOSE BOX AND SEAL WITH TAPE 088120. LABEL WITH 914-796 PRINTED TO GENERAL LABEL SPEC. LS-000003.

NO	COMPONENT NO	DESCRIPTION	QTY/M	U/M
5	914-796	LABEL	.500	EAD
4	890-750	PLASTIC BAG	.500	EAD
3	580143	CARTON	.500	EAD
2	057348	NYLON 6/6	8.536	LB
1	057883	GREEN CONCENTRATE	.264	LB

BILL OF MATERIAL

UNLESS OTHERWISE SPECIFIED, DIMENSIONS DO NOT INCLUDE PLATING.

O	DENOTES CRITICAL CHARACTERISTICS.
CPK	DENOTES CPK DIMENSIONS, MINIMUM CPK VALUE
SI	DENOTES A CHARACTERISTIC THAT PROVIDES AN INDICATION OF PROCESS PERFORMANCE. PROCEDURE FOR MEASUREMENT AND TRACKING TO BE DEFINED IN LITTELFUSE INSPECTION INSTRUCTIONS.
CP	DENOTES CP DIMENSIONS, MINIMUM CP VALUE MUST BE WITHIN THE DIMENSIONAL LIMITATIONS SHOWN ON DRAWING AND INITIALLY LOCATED TO ALLOW FOR MAXIMUM TOOL LIFE.

MATL SPEC

COPIES TO

1	9	18			
2	10	19	FINISH		
3	12	20			
4	13	21	DRW JMB	DATE 5/19/00	SCALE 4:1
5	14	23			
6	15	33	CHK	DATE	SUPER DR
7	16	43	APPD	DATE	RAW STK WT
8	17	53			LBS/M

TOLERANCE UNLESS OTHERWISE SPECIFIED
TWO PLACE DEC ±.010 FRACTION ±
THREE PLACE DEC ±.005 ANGULAR ±1°

TITLE
MAXIFUSE PULLER

Littelfuse® DES PLAINES, ILLINOIS 60016

REVISION C

DRWG. NO. FINAL 00970026N

CAD GENERATED DRAWING - NO PENCIL CHANGES ALLOWED

UNCONTROLLED DOCUMENT

Downloaded From Oneyac.com

单击下面可查看定价，库存，交付和生命周期等信息

>>Littelfuse(美国力特)

Downloaded From Oneyac.com