

Enclosed Fuseholders > Panel Mounted > Circuit Board Mounted

345 HV Series Panel Mount Enclosed Fuse Holders



Additional Information







Product Characteristics						
Compatible Fuses	- For 3AB/3A(; 5y20mm Euses					
Description	Designed to eliminate the possibility of electrical shock, as defined in IEC standards 60127-6. The universal fuseholder body will accept 3AB, 3AG, and 5×20 mm fuse sizes.					
Electrical Insulation Resistance: 10,000 megohm minimum at 500 VDC. Contact Resistance: Less than .005 ohm average at currents up to 1 ampere. Dielectric Strength: 4,000 volts minimum.						
Mounting	unting Threaded styles withstand 15 inlb. mounting torque. Low profile and High profile panel thickness: .032" min./.310" max.					
Molded Parts	Body Material: Black glass-filled thermoplastic (UL 94V0).					
Knob Material	Grey or black glass-filled thermoplastic (UL94 V-0) Hex Nut Material: Black glass-filled thermoplastic.					
Knob Fuse Extractor type with plated copper alloy insert. Plated copper alloy contact clips. Spring loaded, locking mechanism provides an anti-tease feature and will not vibrate loose.						
Terminals	Plated cooper alloy, A-187; dual purpose terminal accepts wire for soldering or a Quick-Connect receptacle.					
Ambient Temperature	-40°C to +85°C.					
Hardware	Threaded style fuseholders are supplied with a thermoplastic hex nut unassembled.					

RoHS 🔊 🗣

* Please refer to Fuseology section for information on proper fuseholder re-rating.

Agency Approval

Agency	Agency File Number	3AG/AB	5×20mm
91	FL E14721		20A, 600V
<u>ج</u>	7316	20A, 600V	20A, 600V





0.090" x 0.160

[2.3mm x 4.1mm] HOLE Terminal Styles


0.187" [4.8mm]

Dimensions

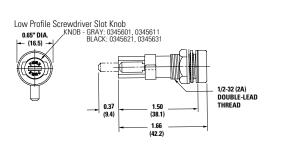


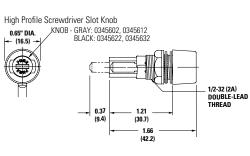

Low Profile Fingergrip Knob

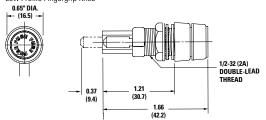


Fast Mount Low Profile Screwdriver Slot Knob



3/16[°] DUAL PURPOSE SOLDER/QUICK CONNECT Suggested Mounting Holes → 0.460° [12.1] → → 0.460° 0.460° 0.460° 0.460° 0.465° (11.2] → A








0.19" -+ | +- -+ [4.8] SPECIAL 1/2" THREAD 1/2" Constant 1/2

Rear Mount Fingergrip Knob



Part Numbering System									
Part N (3AG/AB)	umber 5x20mm	Knob Type	Low Profile	High Profile	Front Mount	Rear Mount	Rt. Angle Terminal	Straight Terminal	Packing
03450601H	03450621H	Screwdriver Slot	Х	-	Х	-	Х	-	Bulk (100 pieces)
03450602H	03450622H	Screwdriver Slot	-	Х	Х	-	Х	-	Bulk (100 pieces)
03450603H	03450623H	Finger Grip	-	Х	Х	-	Х	-	Bulk (100 pieces)
03450611H	03450631H	Screwdriver Slot	Х	-	Х	-	-	Х	Bulk (100 pieces)
03450612H	03450632H	Screwdriver Slot	-	Х	Х	-	-	Х	Bulk (100 pieces)
03450613H	03450633H	Finger Grip	-	Х	Х	-	-	Х	Bulk (100 pieces)
03450701H		Screwdriver Slot	Х	-	Х	-	Х	-	Bulk (100 pieces)
03450711H		Screwdriver Slot	Х	-	Х	-	-	Х	Bulk (100 pieces)
03450903H	03450923H	Finger Grip	-	Х	-	Х	Х	-	Bulk (100 pieces)
03450913H	03450933H	Finger Grip	-	Х	-	Х	-	Х	Bulk (100 pieces)



Enclosed Fuseholders > Panel Mounted > Circuit Board Mounted

345 HV Series Shock Safe Circuit Board Mount Enclosed Fuse Holders 🔤 🕫 🕰




Product Characteristics				
Compatible Fuse Types	3AG 3AB 5×20mm			
Description	Similar to our Shock-Safe panel mount fuseholders, this series is designed per IEC Standards 60127-6. Two different knob styles available are available for use with 3AG and 3AB ($\%'' \times 1\%''$) or 5 \times 20mm fuses.			
Electrical	Insulation Resistance: 10,000 megohm minimum at 500 VDC. Contact Resistance: Less than .005 ohm average at a current of one ampere.			
Dielectric Strength	4000 volts minimum. Mounting: Intended for soldering to printed circuit boards.			
Molded Parts	Body Material: Black glass-filled thermoplastic (UL 94V0).			
Knob	Screwdriver slot, fuse extractor type with nickel-plated, copper alloy insert. Spring-loaded, bayonet style. Knob Material: Grey or Black glass-filled thermoplastic (UL94 V-0)			
Terminals	Brass. Tin-plated.			
Ambient Temperature	-40°C to +85°C.			

Agency Approvals					
Agency	Agency File Number				
91	E14721				
() ()	7316				
	133923				

* Please refer to Fuseology section for information on proper fuseholder re-rating.

Ordering Information					
Ordering Part Number	Catalog Number	Fuse Size	Packing		
03450101H	345 101	¼" × 1¼" Fuses	Bulk (100 pieces)		
03450121H	345 121	5 × 20mm Fuses	Bulk (100 pieces)		
Body only: 03450101HX010					

Knob only: 03450101HX020 (¼" × 1¼") Grey; 03450121HX020 (5 × 20mm) Black.

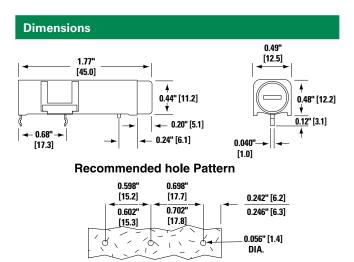

Disclaimer Notice - Information furnished is believed to be accurate and reliable. However, users should independently evaluate the suitability of and test each product selected for their own applications. Littelfuse products are not designed for, and may not be used in, all applications. Read complete Disclaimer Notice at: www.littelfuse.com/disclaimer-electronics.

单击下面可查看定价,库存,交付和生命周期等信息

>>Littelfuse(美国力特)