



# L1SS226LT1G

## S-L1SS226LT1G

Ultra High Speed Switching Application

### 1. FEATURES

- Low forward voltage :VF (3) = 0.9V (typ.)
- Fast reverse recovery time : trr = 1.6ns (typ.)
- Small total capacitance : CT = 0.9pF (typ.)
- We declare that the material of product compliance with RoHS requirements and Halogen Free.
- S- prefix for automotive and other applications requiring unique site and control change requirements; AEC-Q101 qualified and PPAP capable.

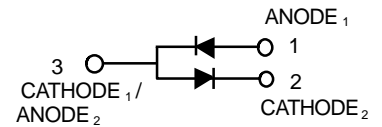

### 2. DEVICE MARKING AND RESISTOR VALUES

Device	Marking	Shipping
L1SS226LT1G	C3	3000/Tape&Reel
L1SS226LT3G	C3	10000/Tape&Reel

### 3. MAXIMUM RATINGS(Ta = 25°C)




Parameter	Symbol	Limits	Unit
Maximum (peak) reverse voltage	VRM	85	V
Reverse voltage	VR	80	V
Maximum (peak) forward current(Note 1)	IFM	300	mA
Average forward current(Note 1)	IO	100	mA
Surge current (10ms)(Note 1)	IFSM	2	A
Power dissipation	P	150	mW
Junction temperature	TJ	125	°C
Storage temperature range	TSTG	-55~+125	°C

1. Unit rating. Total rating = Unit rating × 0.7.

### 4. ELECTRICAL CHARACTERISTICS (Ta= 25°C)

CHARACTERISTICS	Symbol	Min	Typ.	Max	Unit
Forward voltage (IF = 1mA)	VF	-	0.6	-	V
(IF = 10mA)		-	0.72	-	
(IF = 100mA)		-	0.9	1.2	
Reverse current (VR = 30V)	IR	-	-	0.1	μA
(VR = 80V)		-	-	0.5	
Total capacitance (VR = 0, f = 1MHz)	CT	-	0.9	3	pF
Reverse recovery time (IF = 10mA)	trr	-	1.6	4	ns


**5.ELECTRICAL CHARACTERISTICS CURVES**

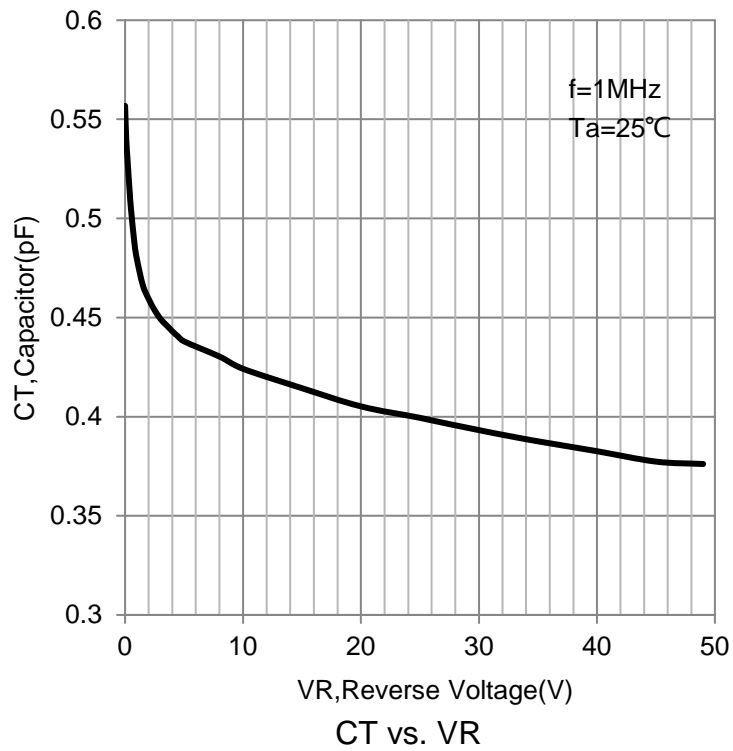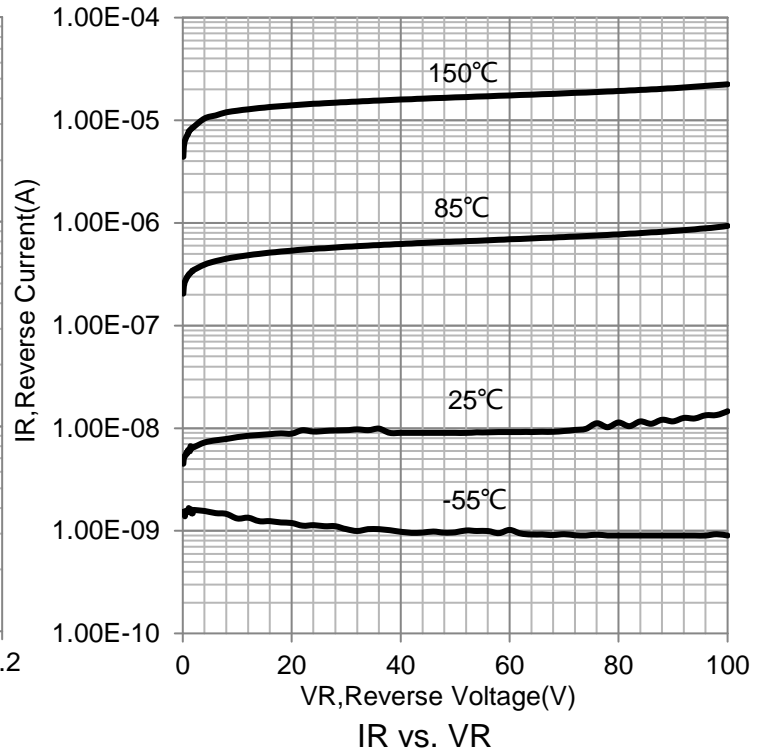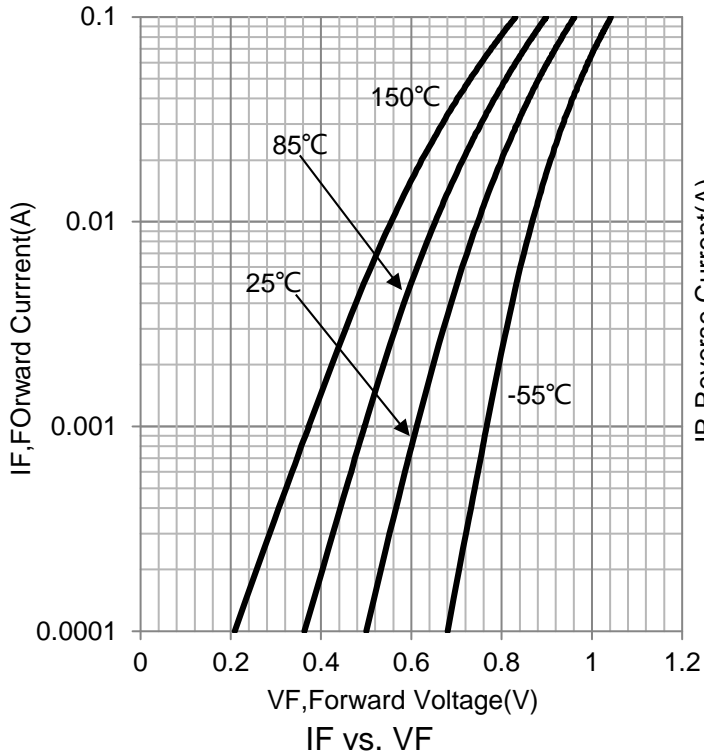

## 6. OUTLINE AND DIMENSIONS


Notes:

1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: MILLIMETERS.
3. MAXIMUM LEAD THICKNESS INCLUDES LEAD FINISH. MINIMUM LEAD THICKNESS IS THE MINIMUM THICKNESS OF BASE MATERIAL.
4. DIMENSIONS D AND E DO NOT INCLUDE MOLD FLASH, PROTRUSIONS OR GATE BURRS.

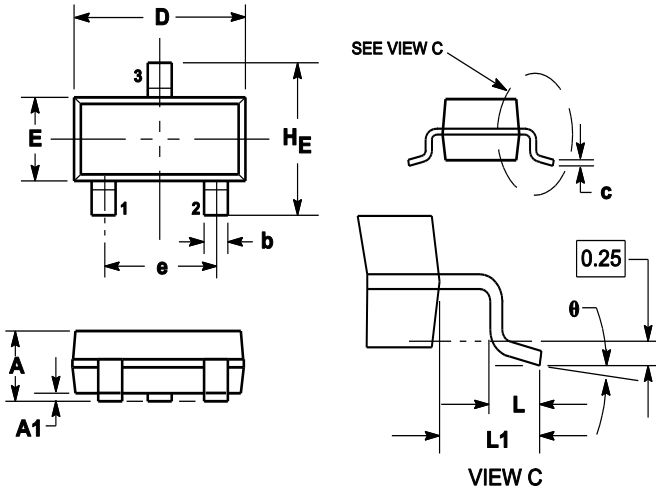

DIM	MILLIMETERS			INCHES		
	MIN	NOM	MAX	MIN	NOM	MAX
A	0.89	1	1.11	0.035	0.04	0.044
A1	0.01	0.06	0.1	0.001	0.002	0.004
b	0.37	0.44	0.5	0.015	0.018	0.02
c	0.09	0.13	0.18	0.003	0.005	0.007
D	2.80	2.9	3.04	0.11	0.114	0.12
E	1.20	1.3	1.4	0.047	0.051	0.055
e	1.78	1.9	2.04	0.07	0.075	0.081
L	0.10	0.2	0.3	0.004	0.008	0.012
L1	0.35	0.54	0.69	0.014	0.021	0.029
HE	2.10	2.4	2.64	0.083	0.094	0.104
$\theta$	0°	---	10°	0°	---	10°

## 7. SOLDERING FOOTPRINT

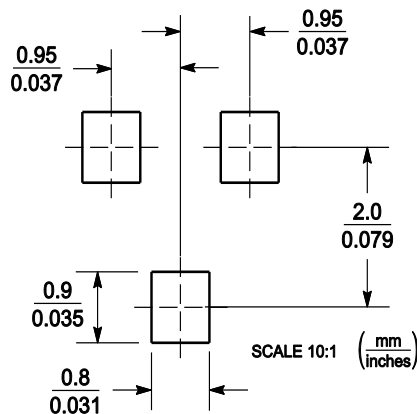

单击下面可查看定价，库存，交付和生命周期等信息

[>>LRC\(乐山无线电\)](#)