


# D2KB10 Thru D2KB100

## High Current Glass Passivated Molding Single-Phase Bridge Rectifier

Reverse Voltage 100 to 1000V Forward Current 2.0 A

### FEATURES

- Plastic Package has Underwriters Laboratory Flammability Classification 94V-0
- High current capacity with small package
- Glass passivated chip junctions
- Superior thermal conductivity
- High IFSM

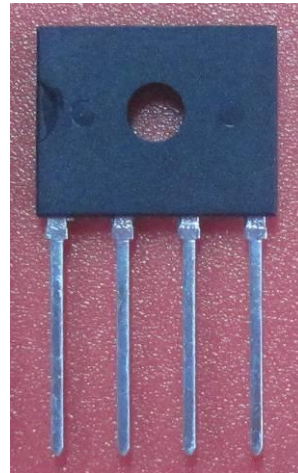

### 1. Maximum & Thermal Characteristics Ratings at 25°C ambient temperature unless otherwise specified.

Parameter Symbol	Symbol	D2KB10	D2KB20	D2KB40	D2KB60	D2KB80	D2KB100	Unit
Maximum repetitive voltage	VRRM	100	200	400	600	800	1000	V
Maximum RMS Voltage	VRMS	70	140	280	420	560	700	V
Maximum DC Blocking Voltage	VDC	100	200	400	600	800	1000	V
Maximum DC reverse current TA=25 °C	IR	5						µA
at rated DC blocking voltage TA=125°C		500						
Average rectified forward current Tc=100°C	Io	2.0						A
60Hz Sine wave Resistance load TA=40°C		1.2						A
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load	IFSM	75						A
Rating of fusing (t<8.3ms)	I <sup>2</sup> t	27						A <sup>2</sup> sec
Max instantaneous forward voltage at 2.0A	VF	1.0						V
Dielectric strength terminals to case, AC 1 minute Current 1mA	Vdia	2.5						KV
Maximum thermal on P.C.B. without heat-sink	RθJA	13.4						°C/W
resistance per leg on Al plate heat-sink	RθJC	2.3						
Operating junction temperature	TJ	-55~150						°C
Storage temperature	Tstg	-55~150						°C

# D2KB10 Thru D2KB100

## 2. Ratings and Characteristic Curves (TA = 25°C unless otherwise noted)

Fig. 1 Derating Curve

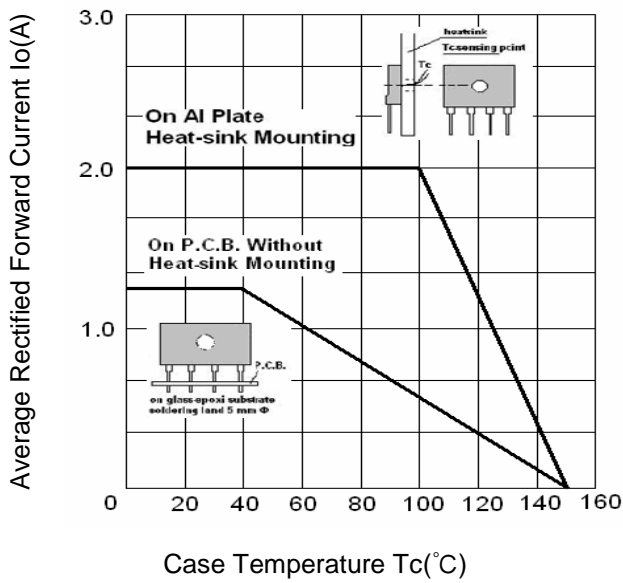


Fig.2 Typical Reverse Characteristics

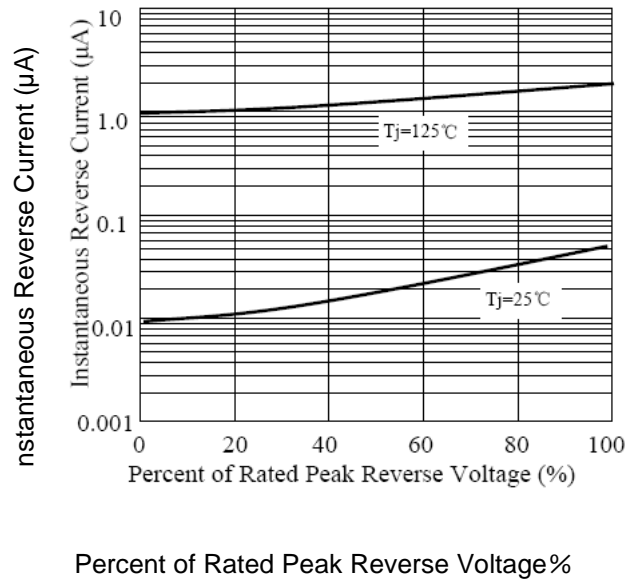


Fig.3 Forward Voltage



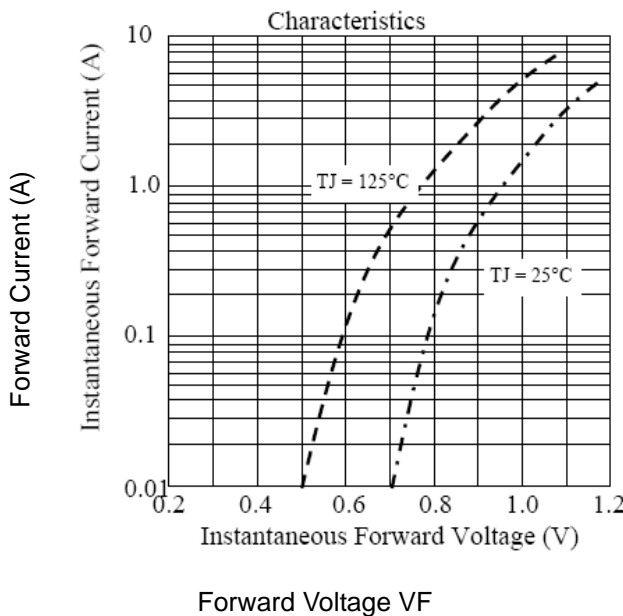


Fig.4 Peak Surge Forward Capability

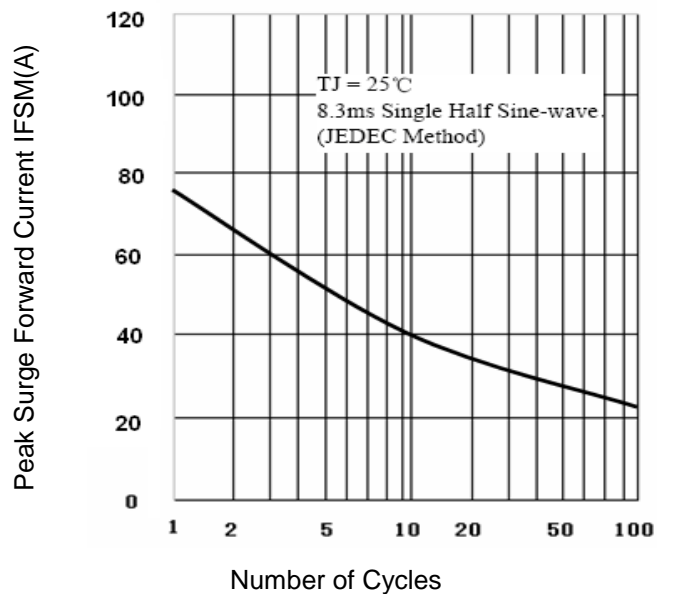

# D2KB10 Thru D2KB100

## 3. Marking Identification

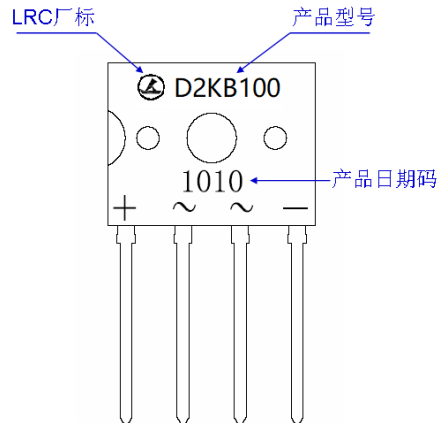


### Note:


生产日期码包含4位数字，例如“1010”，前两个数字“10”表示为2010年，另外二个数字“10”是指第10周，即表示该产品为2010年10周生产。

型号:

**D   2   KB   100**

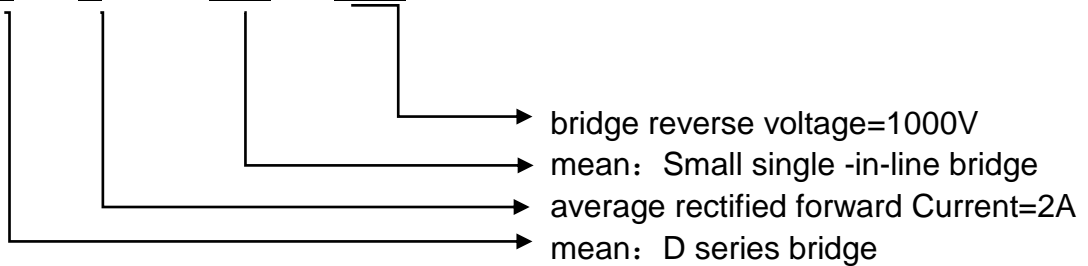

## 4. Dimension

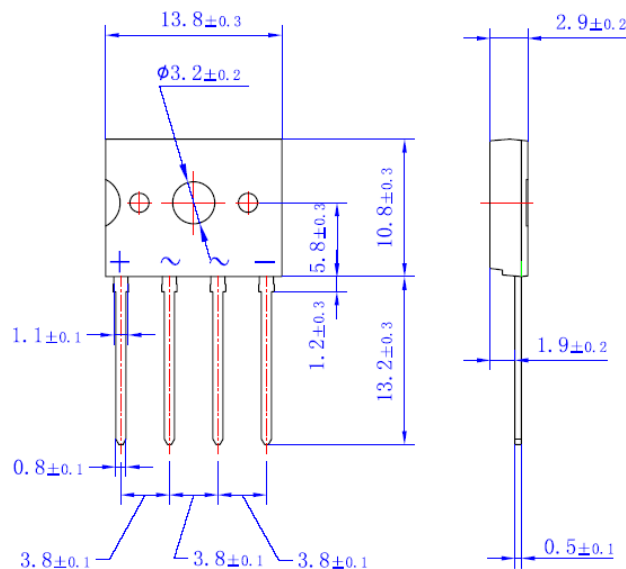

单击下面可查看定价，库存，交付和生命周期等信息

[>>LRC\(乐山无线电\)](#)