

# LMDL914T1G

## S-LMDL914T1G

High –Speed Switching Diode

### 1. FEATURES

- We declare that the material of product compliance with RoHS requirements and Halogen Free.
- S- prefix for automotive and other applications requiring unique site and control change requirements; AEC-Q101 qualified and PPAP capable.

### 2. DEVICE MARKING AND ORDERING INFORMATION

Device	Marking	Shipping
LMDL914T1G	5D	3000/Tape&Reel
LMDL914T3G	5D	10000/Tape&Reel




### 3. MAXIMUM RATINGS(Ta = 25°C)

Parameter	Symbol	Limits	Unit
Reverse Voltage	VR	100	V
Forward Current	IF	200	mA
Peak Forward Surge Current	IFMS	500	mA

### 4. THERMAL CHARACTERISTICS

Parameter	Symbol	Limits	Unit
Total Device Dissipation, FR-4 Board (Note 1) @ TA = 25°C Derate above 25°C	PD	200 1.57	mW mW/°C
Thermal Resistance, Junction-to-Ambient(Note 1)	RθJA	635	°C/W
Thermal Resistance, Junction-to-Case	RθJC	350	°C/W
Junction and Storage temperature	TJ,Tstg	-55~+150	°C




1. FR-4 = 1.0×0.75×0.062 in.

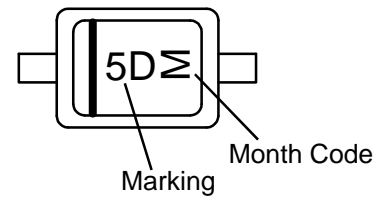

**5. ELECTRICAL CHARACTERISTICS (Ta= 25°C)**

Characteristic	Symbol	Min.	Typ.	Max.	Unit
Reverse Breakdown Voltage (IR = 100µA)	VBR	100	-	-	V
Reverse Voltage Leakage Current (VR = 20V) (VR = 75V)	IR	- -	- -	25 5	nA µA
Diode Capacitance (VR = 0, f = 1.0 MHz)	CT	-	-	4	pF
Forward Voltage (IF = 10 mA) (IF = 50 mA)	VF	- -	- -	1 1	V
Reverse Recovery Time (IF = IR = 10 mA)	trr	-	-	4	ns
Non-Repetitive Peak Forward Current (square wave; Tj=25 °C prior to surge t=1 µs) (t=1ms) (t=1s)	IFSM	- - -	- - -	4 1 0.5	A


### 6. ELECTRICAL CHARACTERISTICS CURVES

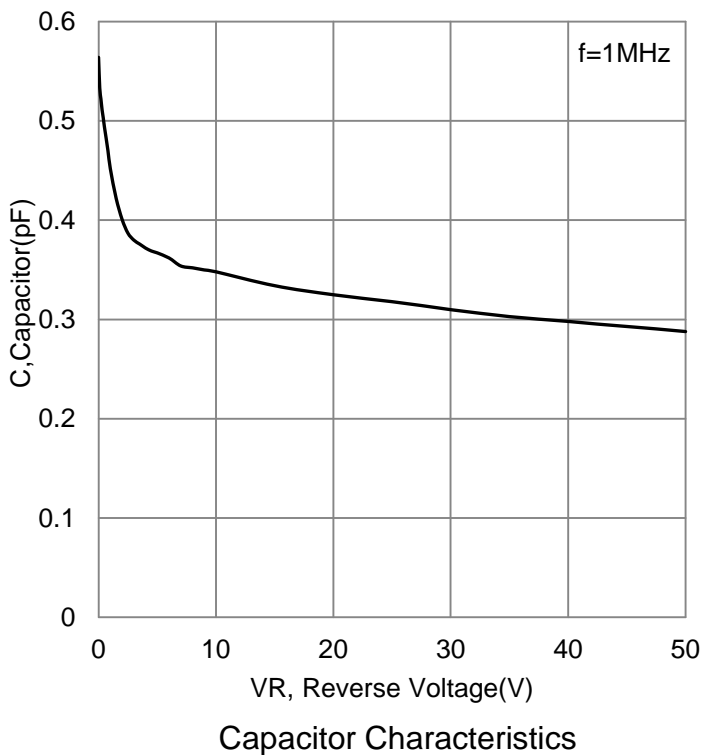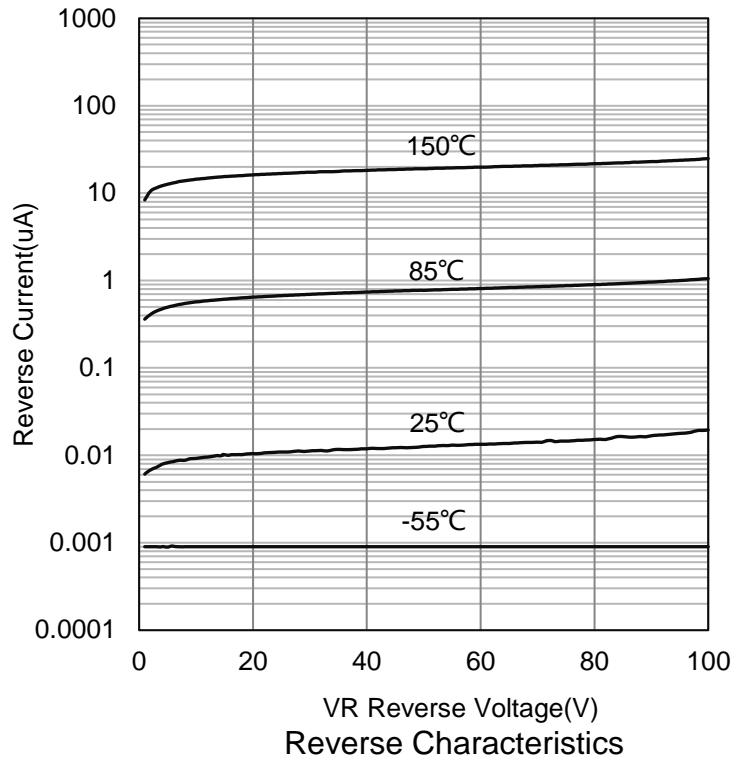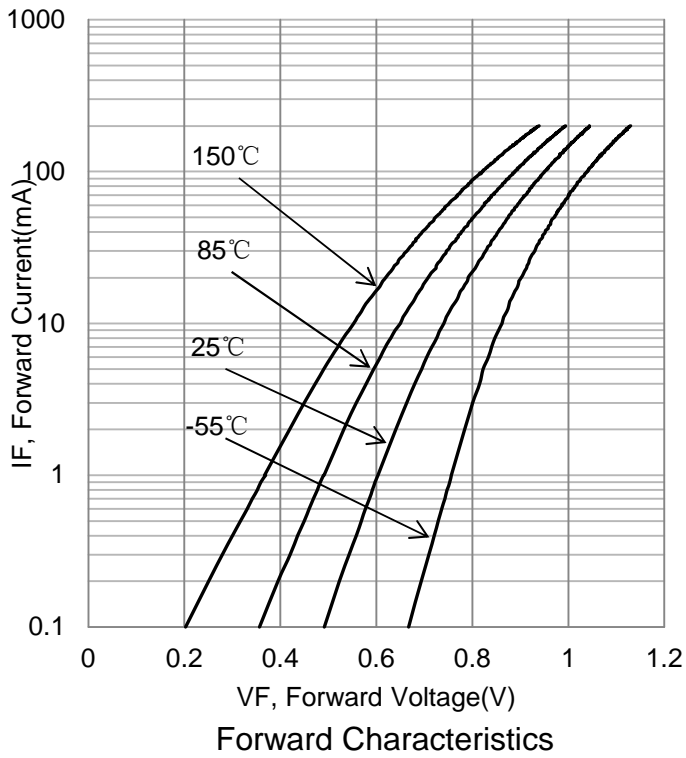

## 7.OUTLINE AND DIMENSIONS


Notes:

1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: MILLIMETERS.
3. MAXIMUM LEAD THICKNESS INCLUDES LEAD FINISH. MINIMUM LEAD THICKNESS IS THE MINIMUM THICKNESS OF BASE MATERIAL.
4. DIMENSIONS D AND E DO NOT INCLUDE MOLD FLASH, PROTRUSIONS OR GATE BURRS.

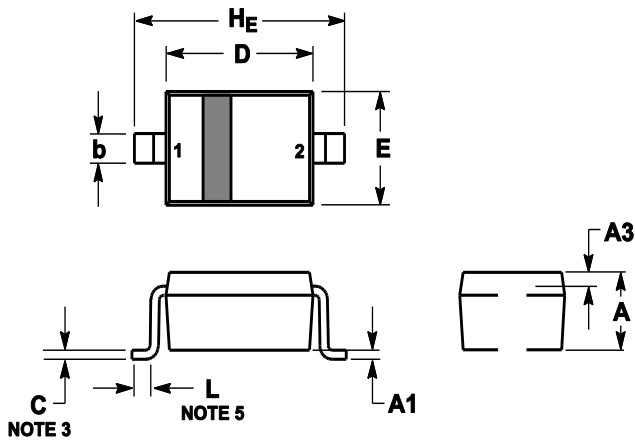

DIM	MILLIMETERS			INCHES		
	MIN	NOM	MAX	MIN	NOM	MAX
A	0.8	0.9	1	0.031	0.035	0.04
A1	0	0.05	0.1	0	0.002	0.004
A3	0.15REF			0.006REF		
b	0.25	0.32	0.4	0.01	0.012	0.016
C	0.089	0.12	0.177	0.003	0.005	0.007
D	1.6	1.7	1.8	0.062	0.066	0.07
E	1.15	1.25	1.35	0.045	0.049	0.053
L	0.08			0.003		
$H_E$	2.3	2.5	2.7	0.09	0.098	0.105

## 8.SOLDERING FOOTPRINT

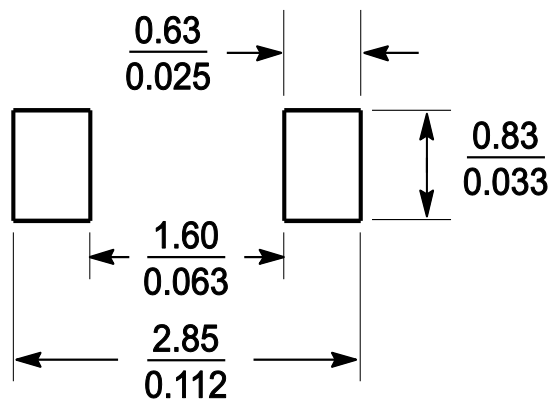

## DISCLAIMER

- Before you use our Products, you are requested to carefully read this document and fully understand its contents. LRC shall not be in any way responsible or liable for failure, malfunction or accident arising from the use of any LRC's Products against warning, caution or note contained in this document.
- All information contained in this document is current as of the issuing date and subject to change without any prior notice. Before purchasing or using LRC's Products, please confirm the latest information with a LRC sales representative.

单击下面可查看定价，库存，交付和生命周期等信息

[>>LRC\(乐山无线电\)](#)