



# LUDZS3.3BT1G

## S-LUDZS3.3BT1G

Zener Voltage Regulators  
200 mW SOD-323 Surface Mount

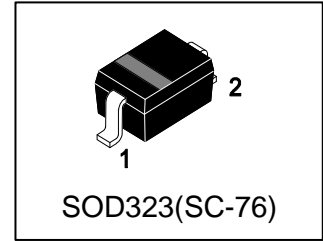

### 1. FEATURES

- We declare that the material of product compliance with RoHS requirements and Halogen Free.
- S- prefix for automotive and other applications requiring unique site and control change requirements; AEC-Q101 qualified and PPAP capable.

### 2. DEVICE MARKING AND ORDERING INFORMATION

Device	Marking	Shipping
LUDZS3.3BT1G	52	3000/Tape&Reel
LUDZS3.3BT3G	52	10000/Tape&Reel

### 3. MAXIMUM RATINGS (Ta = 25°C)

Parameter	Symbol	Limits	Unit
Power dissipation	PD	200	mW
Thermal Resistance from Junction to Ambient	R $\theta$ JA	635	°C/W
Junction temperature	T <sub>j</sub>	150	°C
Storage temperature	T <sub>stg</sub>	-55 to +150	°C
Operating temperature	T <sub>opr</sub>	-55 to +150	°C




### 4. ELECTRICAL CHARACTERISTICS (Ta= 25°C)

Characteristic	Symbol	Min.	Typ.	Max.	Unit
Zener voltage (IZT=5mA)	V <sub>Z</sub>	3.32	-	3.53	V
Operating resistance (IZT=5mA)	Z <sub>ZT</sub>	-	-	120	$\Omega$
Rising operating resistance (IZK=0.5mA)	Z <sub>ZK</sub>	-	-	1000	$\Omega$
Reverse current (V <sub>R</sub> =1V)	I <sub>R</sub>	-	-	20	$\mu$ A

1. The Zener voltage (V<sub>Z</sub>) is measured 40ms after power is supplied.

2. The operating resistances (Z<sub>Z</sub>, Z<sub>ZK</sub>) are measured by superimposing a minute alternating current on the regulated current (I<sub>Z</sub>).

**5.ELECTRICAL CHARACTERISTICS CURVES**

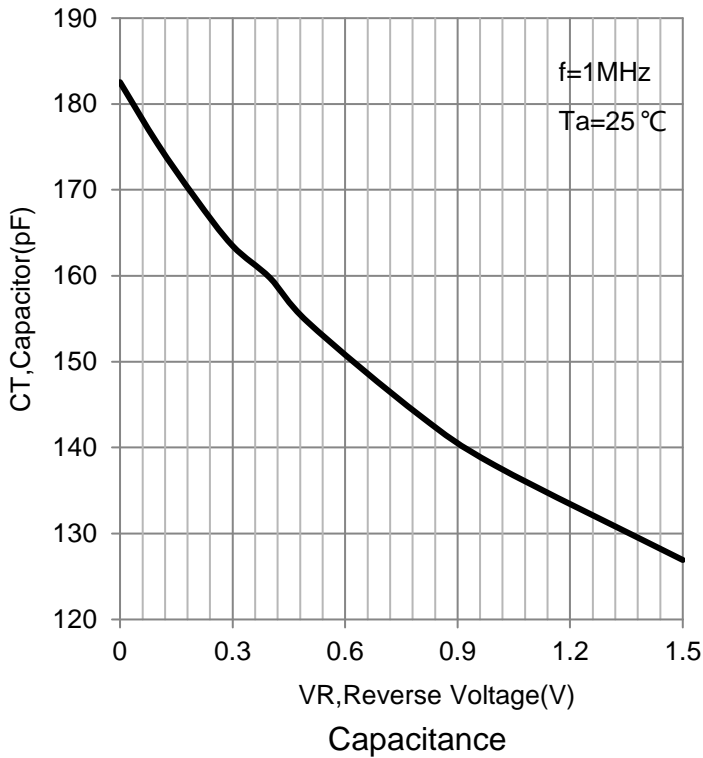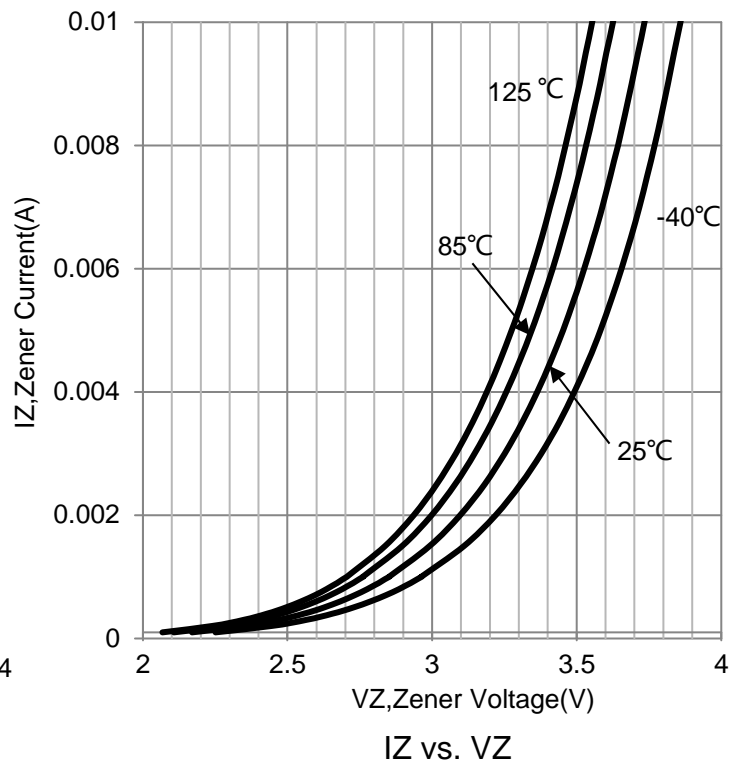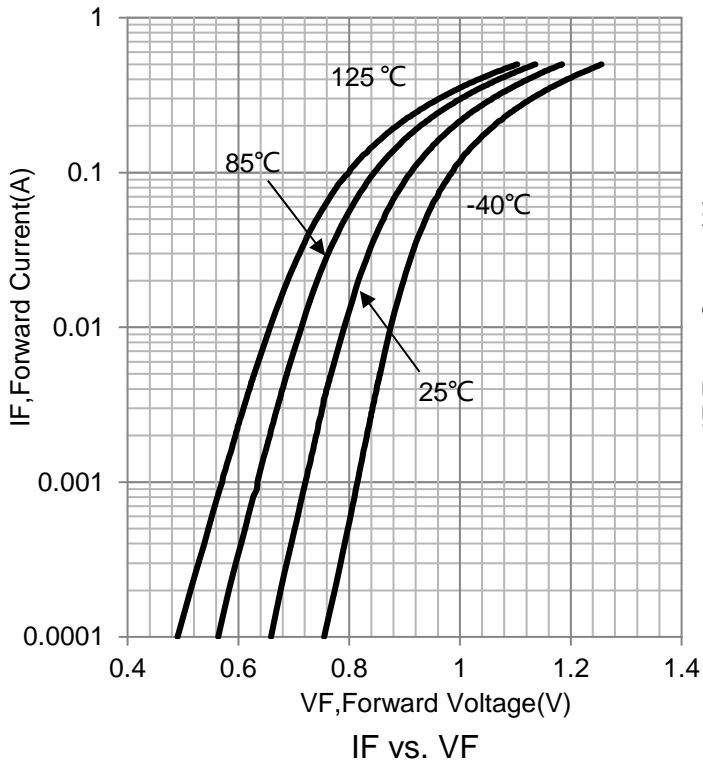

## 6. OUTLINE AND DIMENSIONS


Notes:

1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: MILLIMETERS.
3. MAXIMUM LEAD THICKNESS INCLUDES LEAD FINISH. MINIMUM LEAD THICKNESS IS THE MINIMUM THICKNESS OF BASE MATERIAL.
4. DIMENSIONS D AND E DO NOT INCLUDE MOLD FLASH, PROTRUSIONS OR GATE BURRS.



DIM	MILLIMETERS			INCHES		
	MIN	NOM	MAX	MIN	NOM	MAX
A	0.8	0.9	1	0.031	0.035	0.04
A1	0	0.05	0.1	0	0.002	0.004
A3	0.15REF			0.006REF		
b	0.25	0.32	0.4	0.01	0.012	0.016
C	0.089	0.12	0.177	0.003	0.005	0.007
D	1.6	1.7	1.8	0.062	0.066	0.07
E	1.15	1.25	1.35	0.045	0.049	0.053
L	0.08			0.003		
HE	2.3	2.5	2.7	0.09	0.098	0.105

## 7. SOLDERING FOOTPRINT

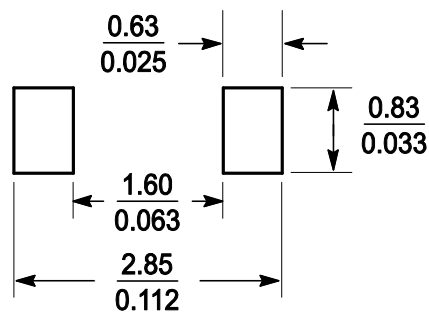

单击下面可查看定价，库存，交付和生命周期等信息

[>>LRC\(乐山无线电\)](#)