

SM320B THRU SM3100B

VOLTAGE 20V ~ 100V

3.0AMP Surface Mount Schottky Barrier Rectifiers

FEATURES


- * Ideal for surface mount applications
- * Easy pick and place
- * Built-in strain relief
- * Low forward voltage drop

MECHANICAL DATA

- * Case: Molded plastic
- * Epoxy: UL 94V-0 rate flame retardant
- * Metallurgically bonded construction
- * Polarity: Color band denotes cathode end
- * Mounting position: Any
- * Weight: 0.093 grams

DO-214AA

SMB



MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Rating 25°C ambient temperature unless otherwise specified.
Single phase half wave, 60Hz, resistive or inductive load.
For capacitive load, derate current by 20%.

TYPE NUMBER	SM320B	SM330B	SM340B	SM350B	SM360B	SM380B	SM390B	SM3100B	UNITS
Maximum Recurrent Peak Reverse Voltage	20	30	40	50	60	80	90	100	V
Maximum RMS Voltage	14	21	28	35	42	56	63	70	V
Maximum DC Blocking Voltage	20	30	40	50	60	80	90	100	V
Maximum Average Forward Rectified Current See Fig. 1	3.0								A
Peak Forward Surge Current, 8.3 ms single half sine-wave superimposed on rated load (JEDEC method)	100								A
Maximum Instantaneous Forward Voltage at 3.0A	0.55		0.75		0.85				V
Maximum DC Reverse Current Ta=25°C	2.0								mA
at Rated DC Blocking Voltage Ta=100°C	20								mA
Typical Junction Capacitance (Note 1)	300								pF
Typical Thermal Resistance R JA (Note 2)	17								°C/W
Operating Temperature Range Tj	-50 — +125								°C
Storage Temperature Range Tstg	-65 — +150								°C

NOTES:

1. Measured at 1MHz and applied reverse voltage of 4.0V D.C.
2. Thermal Resistance Junction to Ambient.

RATING AND CHARACTERISTIC CURVES (SM320B THRU SM3100B)

FIG.1-TYPICAL FORWARD CURRENT DERATING CURVE

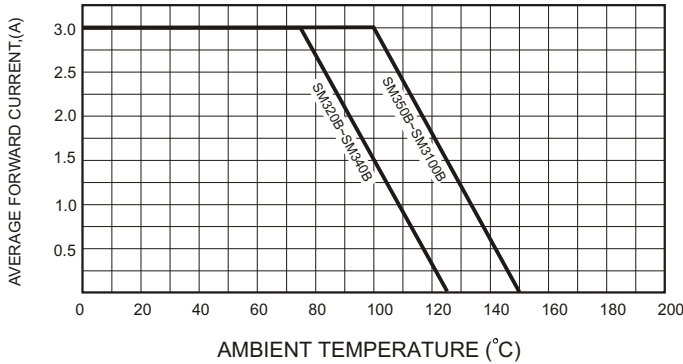


FIG.2-TYPICAL FORWARD CHARACTERISTICS

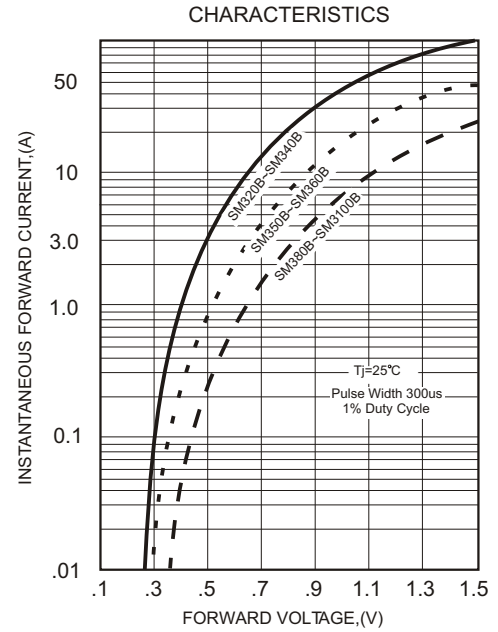


FIG.3-MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

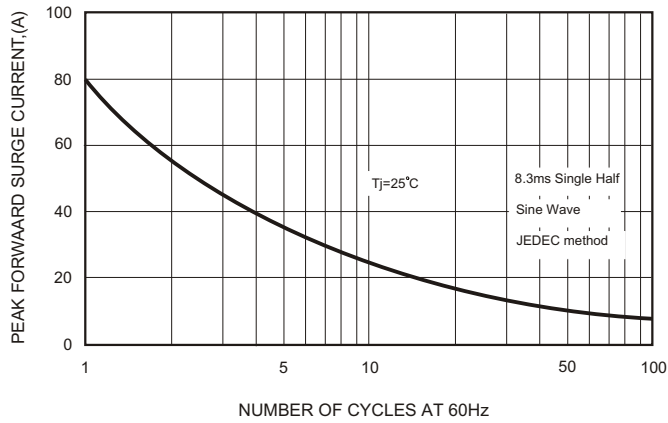


FIG.5 - TYPICAL REVERSE CHARACTERISTICS



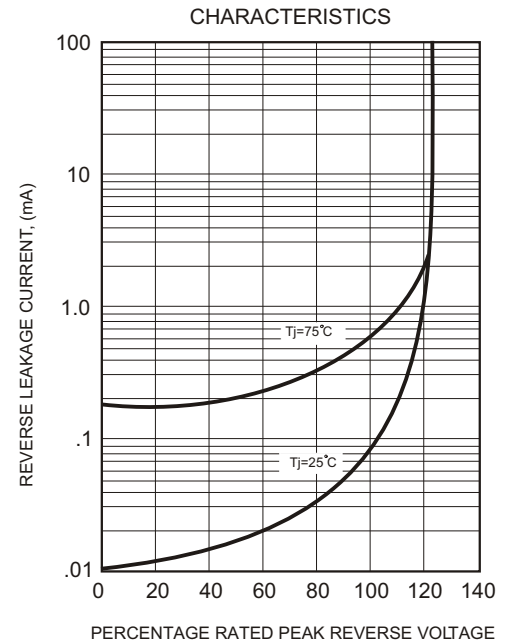


FIG.4-TYPICAL JUNCTION CAPACITANCE

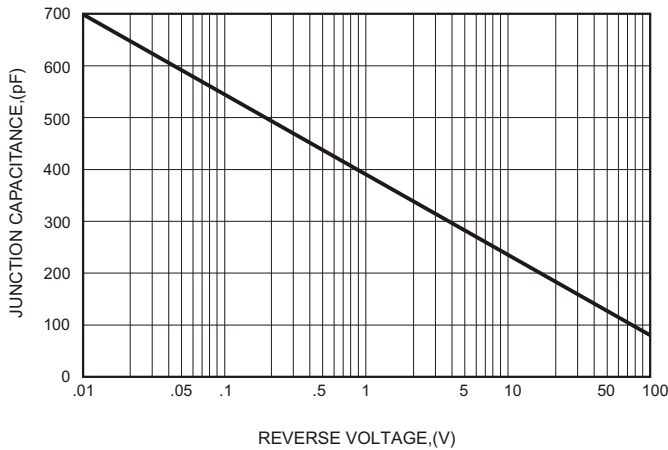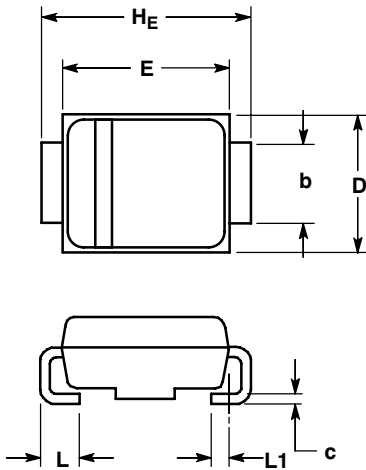


PACKAGE DIMENSIONS
**SMB
DO-214AA**


NOTES:

1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: INCH.
3. D DIMENSION SHALL BE MEASURED WITHIN DIMENSION P.



DIM	MILLIMETERS			INCHES		
	MIN	NOM	MAX	MIN	NOM	MAX
A	1.90	2.13	2.45	0.075	0.084	0.096
A1	0.05	0.10	0.20	0.002	0.004	0.008
b	1.96	2.03	2.20	0.077	0.080	0.087
c	0.15	0.23	0.31	0.006	0.009	0.012
D	3.30	3.56	3.95	0.130	0.140	0.156
E	4.06	4.32	4.60	0.160	0.170	0.181
HE	5.21	5.44	5.60	0.205	0.214	0.220
L	0.76	1.02	1.60	0.030	0.040	0.063
L1		0.51 REF			0.020 REF	

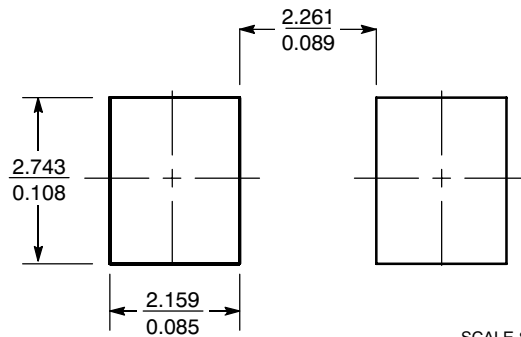SOLDERING FOOTPRINT*

 SCALE 8:1 ($\frac{\text{mm}}{\text{inches}}$)

Surface Mount Packaging

Packing

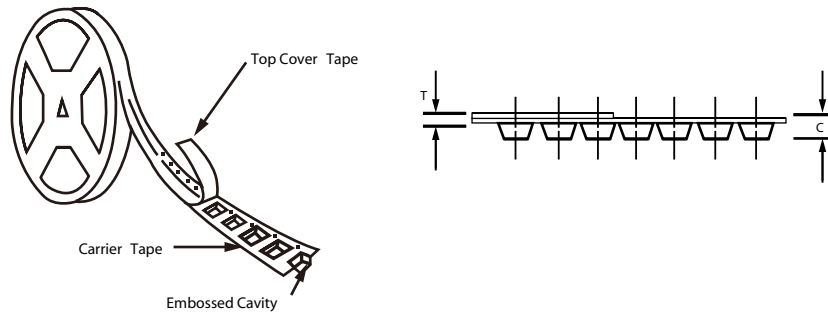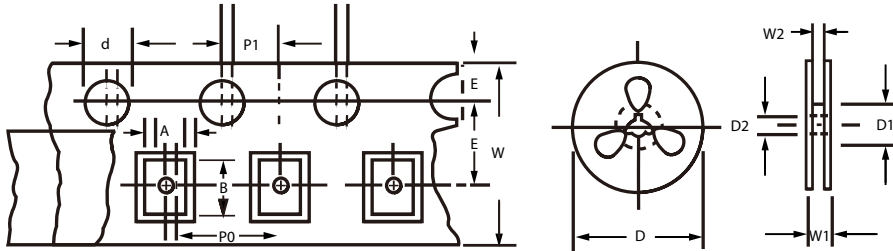DEVICE TYPE	Q'TY/REEL (PCS)	REEL DIA. (mm)	BOX SIZE (mm)	Q'TY/BOX (PCS)	CARTON / SIZE (mm)	Q'TY / CARTON (PCS)
SMB	3K	330	337x337x39	6K	380x220x370	30K



Reel Taping Specifications for Surface Mount Devices

Item	Symbol	SMA	SMB	SMC
Carrier width	A	2.7 (max)	4.0 (max)	2.7 (max)
Carrier length	B	5.3 (max)	5.9 (max)	5.3 (max)
Carrier depth	C	2.66 (max)	3.0 (max)	2.66 (max)
Sprocket hole	d	1.50±0.1 DIA	1.50±0.1 DIA	1.50±0.1 DIA
Reel outside diameter	D	330±2	330±2	330±2
Reel inner diameter	D1	50 min	50 min	50 min
Feed hole diameter	D2	13.5±1	13.5±1	13.5±1
Sprocket hole position	E	1.75±0.1	1.75±0.1	1.75±0.1
Punch hole position	F	5.5±0.05	5.5±0.05	7.5±0.1
Sprocket hole pitch	P	4.0±0.1	8.0±0.1	8.0±0.1
Sprocket hole pitch	P0	4.0±0.1	4.0±0.1	4.0±0.1
Embossment center	P1	2.0±0.05	2.0±0.05	2.0±0.05
Overall tape thickness	T	0.6 max	0.6 max	0.6 max
Tape width	W	12.0±0.3	12.0±0.3	16.0±0.3
Reel width	W1	18.4 (max)	18.4 (max)	22.4 (max)
Reed width	W2	14.4 (max)	14.4 (max)	18.4 (max)

单击下面可查看定价，库存，交付和生命周期等信息

[>>LRC\(乐山无线电\)](#)