



# LRB751G-40T1G

## S-LRB751G-40T1G

Schottky barrier diode



### 1. FEATURES

- We declare that the material of product compliance with RoHS requirements and Halogen Free.
- S- prefix for automotive and other applications requiring unique site and control change requirements; AEC-Q101 qualified and PPAP capable.
- Small power mold type.
- Low VF
- High reliability.

### 2. Construction

- Silicon epitaxial planar

### 3. DEVICE MARKING AND RESISTOR VALUES

Device	Marking	Shipping
LRB751G-40T1G	5	4000/Tape&Reel




### 4. MAXIMUM RATINGS(Ta = 25°C)

Parameter	Symbol	Limits	Unit
Reverse voltage (repetitive peak)	VRM	40	V
Reverse voltage(DC)	VR	30	V
Average rectified forward current	IO	30	mA
Forward current surge peak (60Hz · 1cyc)	IFSM	200	mA
Junction temperature	Tj	125	°C
Storage temperature	Tstg	-40~+125	°C


### 5. ELECTRICAL CHARACTERISTICS (Ta= 25°C)

CHARACTERISTICS	Symbol	Min	Typ	Max	Unit
Forward voltage (IF=1mA)	VF	-	-	0.37	V
Reverse current (VR=30V)	IR	-	-	0.5	μA
Capacitance between terminals (VR =1V , f=1MHz)	Ct	-	0.9	-	pF

### 6.ELECTRICAL CHARACTERISTICS CURVES

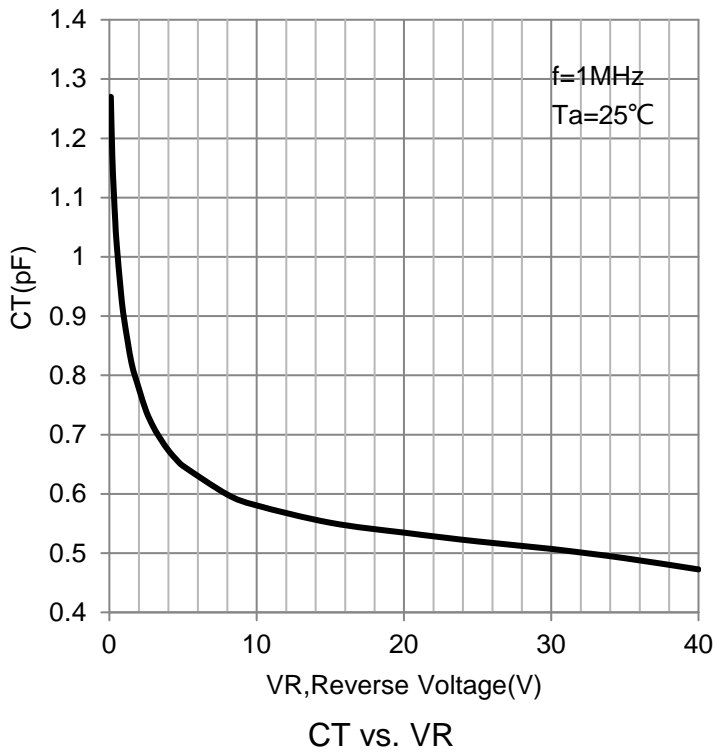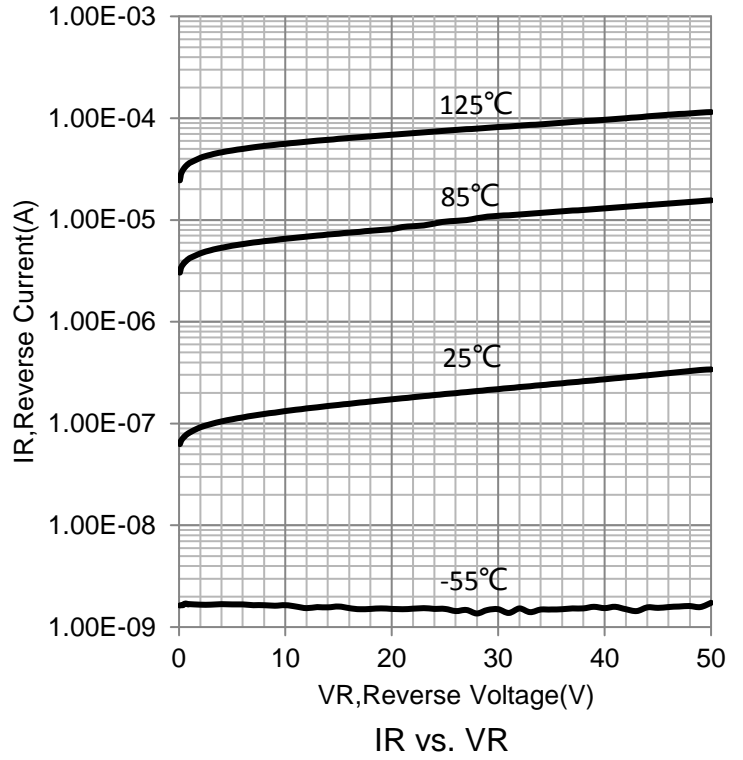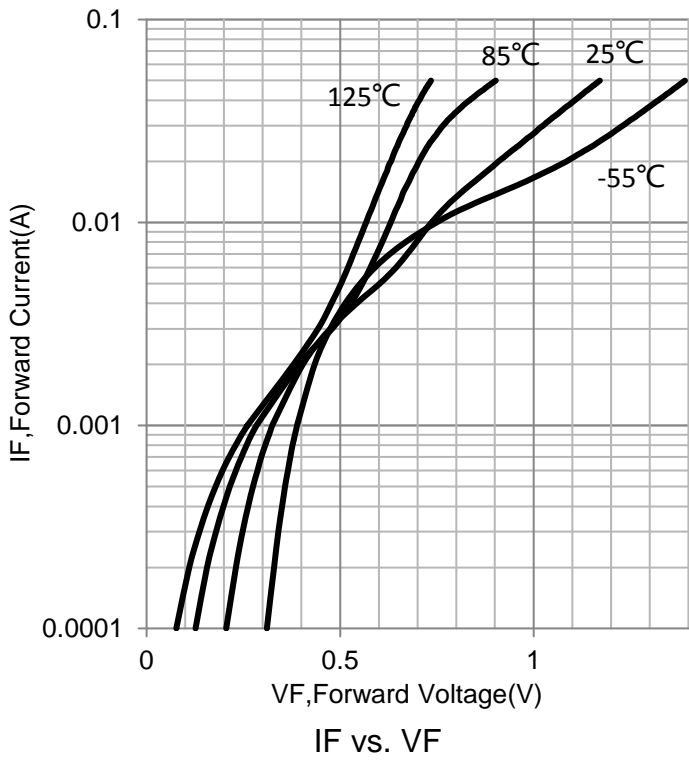

### 7. OUTLINE AND DIMENSIONS

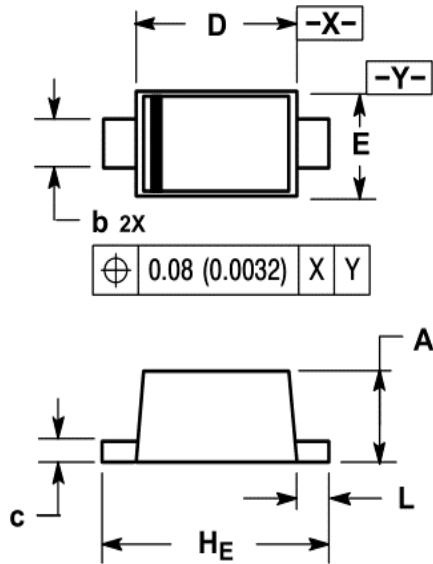


NOTES:

1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: MILLIMETER.
3. MAXIMUM LEAD THICKNESS INCLUDES LEAD FINISH THICKNESS. MINIMUM LEAD THICKNESS IS THE MINIMUM THICKNESS OF BASE MATERIAL.

Dim	MILLIMETERS			NCES		
	MIN	NOM	MAX	MIN	NOM	MAX
A	0.49	0.52	0.55	0.019	0.020	0.022
b	0.25	0.28	0.32	0.0098	0.011	0.013
c	0.08	0.12	0.15	0.0032	0.0047	0.0059
D	0.95	1.00	1.05	0.037	0.039	0.041
E	0.55	0.60	0.65	0.022	0.024	0.026
HE	1.35	1.40	1.45	0.053	0.055	0.057
L	0.15	0.2	0.25	0.006	0.0079	0.010

### 8. SOLDERING FOOTPRINT

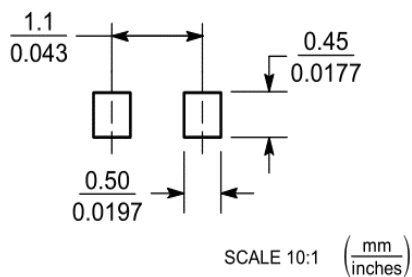

单击下面可查看定价，库存，交付和生命周期等信息

[>>LRC\(乐山无线电\)](#)